

S
912.1625
H3mp
1969

STATE DOCUMENTS

MONTANA

INTERSTATE AND PRIMARY

ROUTE MAPS

080



MONTANA STATE LIBRARY
930 East Lyndale Avenue
Helena, Montana 59601

SEPT. 1969

Montana State Library



3 0864 1006 9008 3

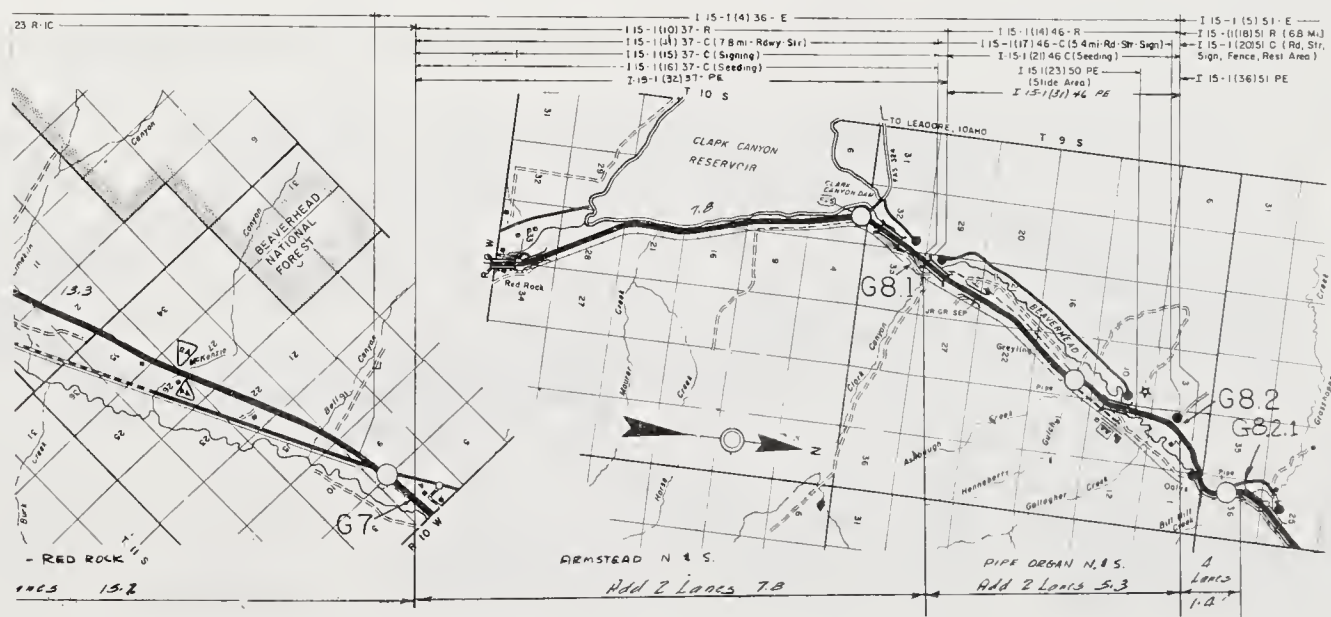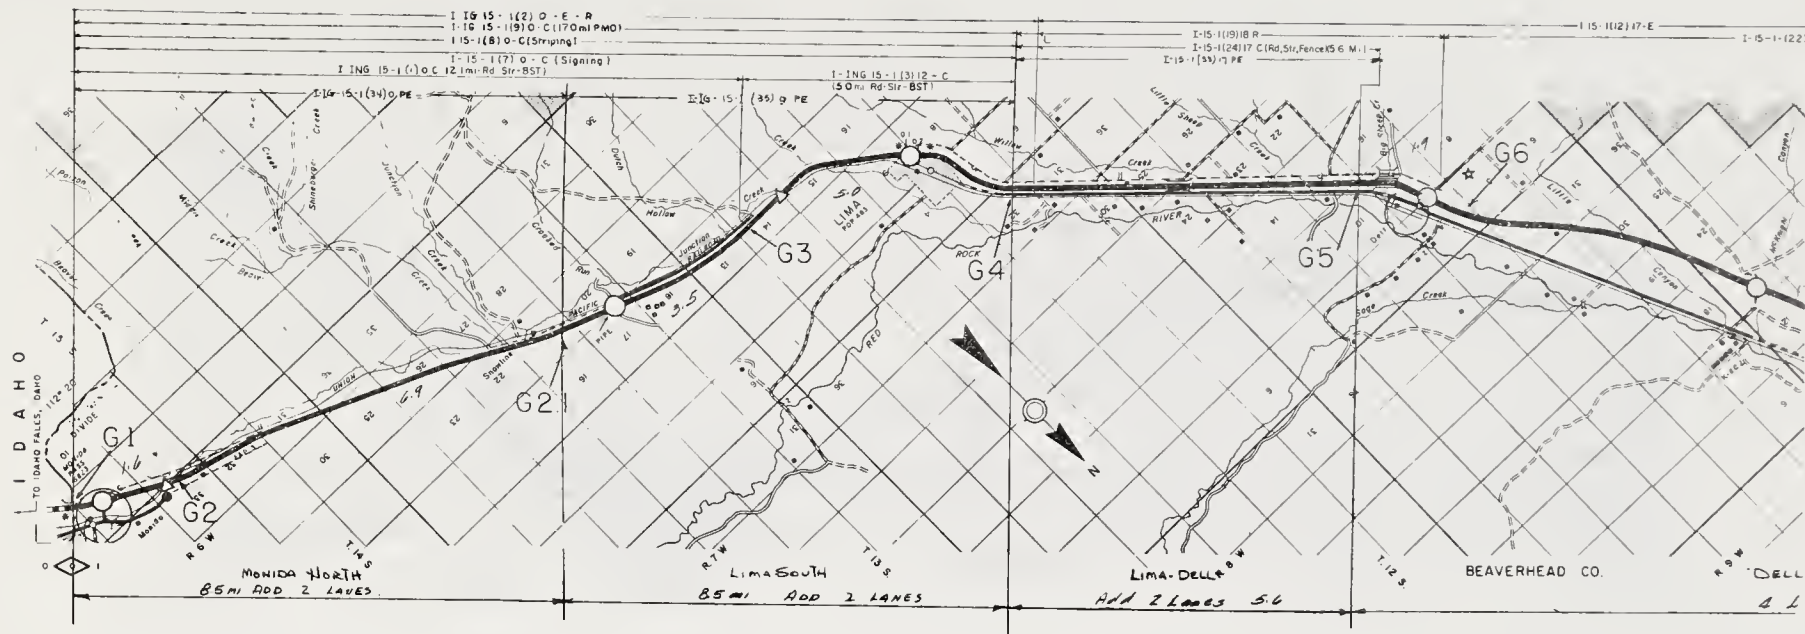

LEGEND FOR INTERSTATE ROUTES



- INTERSTATE LOCATION STEP 4-5
- INTERSTATE LOCATION STEP 1-2-3
- INTERCHANGE
- HIGHWAY GRADE SEPARATION NO CONNECTION
- RAILROAD GRADE SEPARATION
- COMBINATION HIGHWAY-RAILROAD GRADE SEPARATION
- OTHER BRIDGE
- TUNNEL
- TOLL BRIDGE TUNNEL, HIGHWAY OR COMBINATION
- FRONTAGE ROAD
- TERMINATED CROSS ROAD
- INTERSECTION AT-GRADE
- URBAN AREA BOUNDARY
- POST MILEAGE
- ROUTE SECTIONS

SCALE IN MILES
0 1 2 3 4





Digitized by the Internet Archive
in 2018 with funding from
Montana State Library

<https://archive.org/details/montanainterstat1969unse>

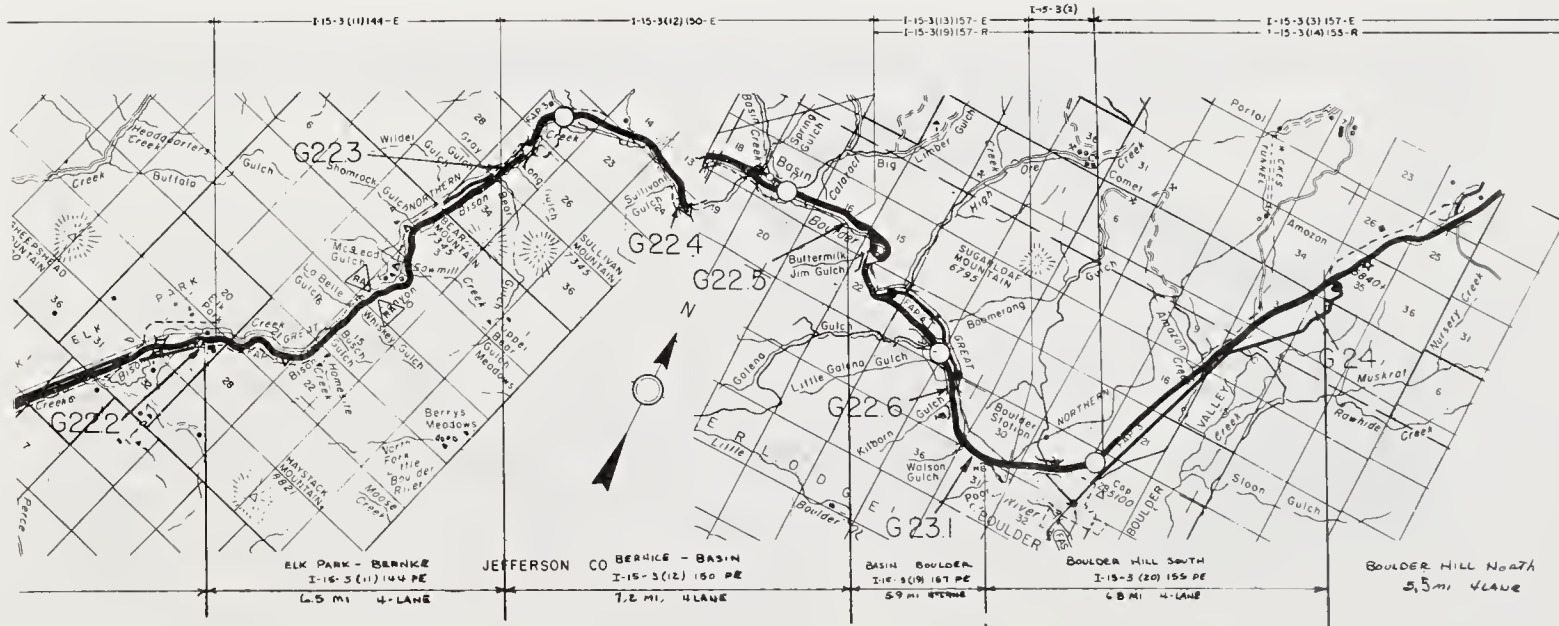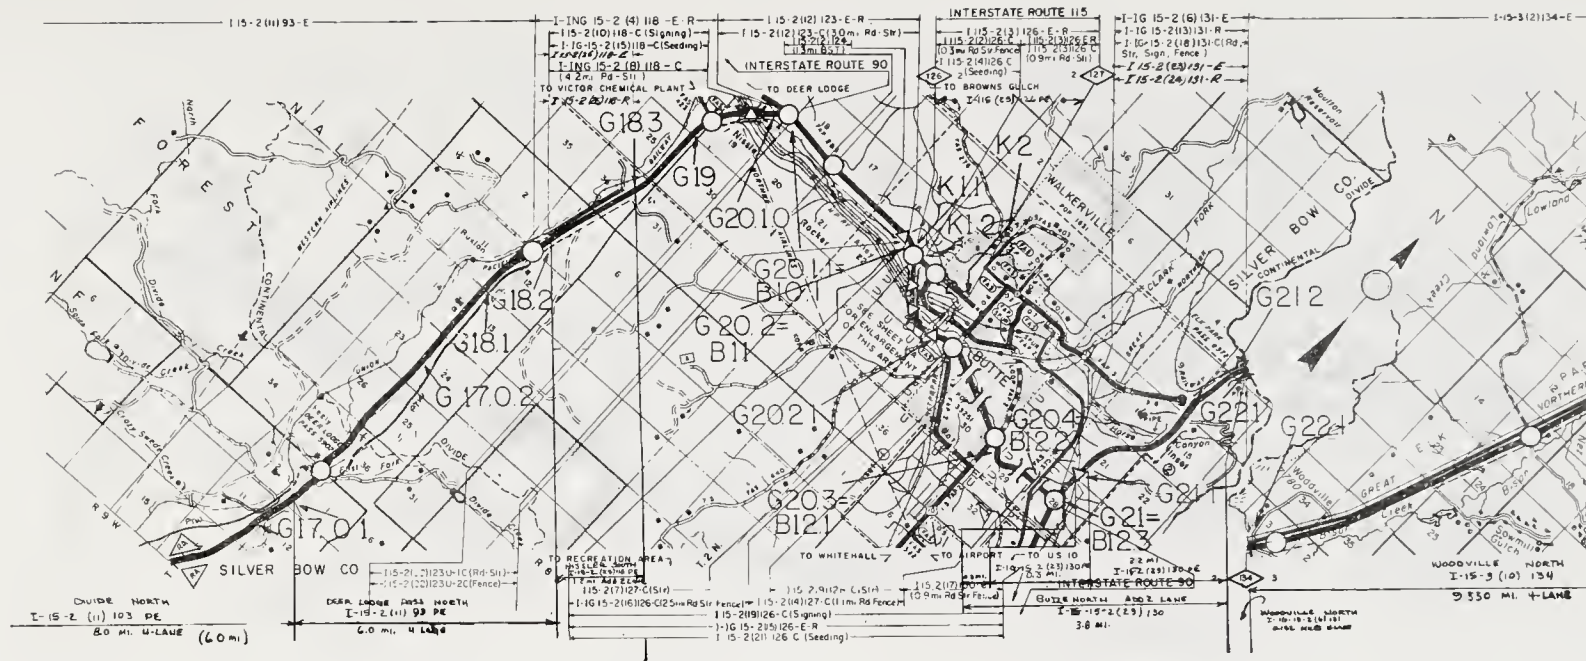

SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 15
Sheet 3 of 8
Date January 1, 196
INTERSTATE ROUTE 115
(COMPLETE ROUTE ON THIS SHEET)

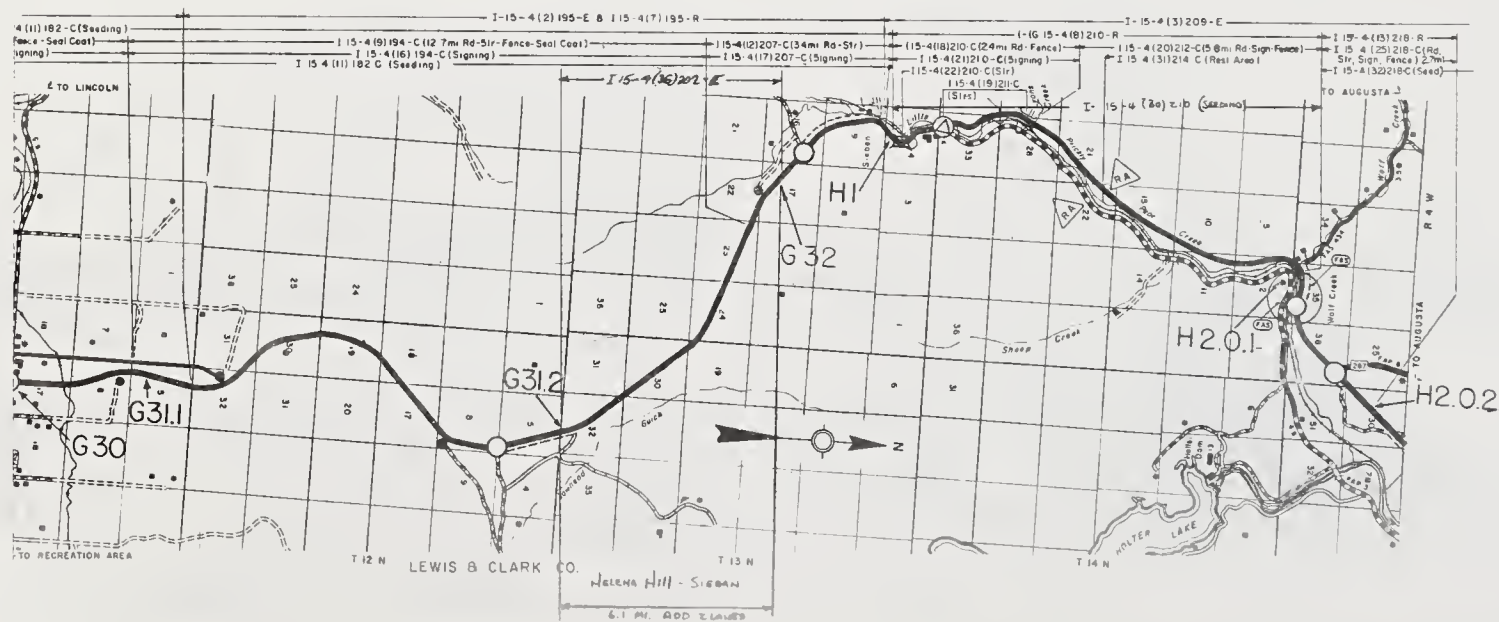
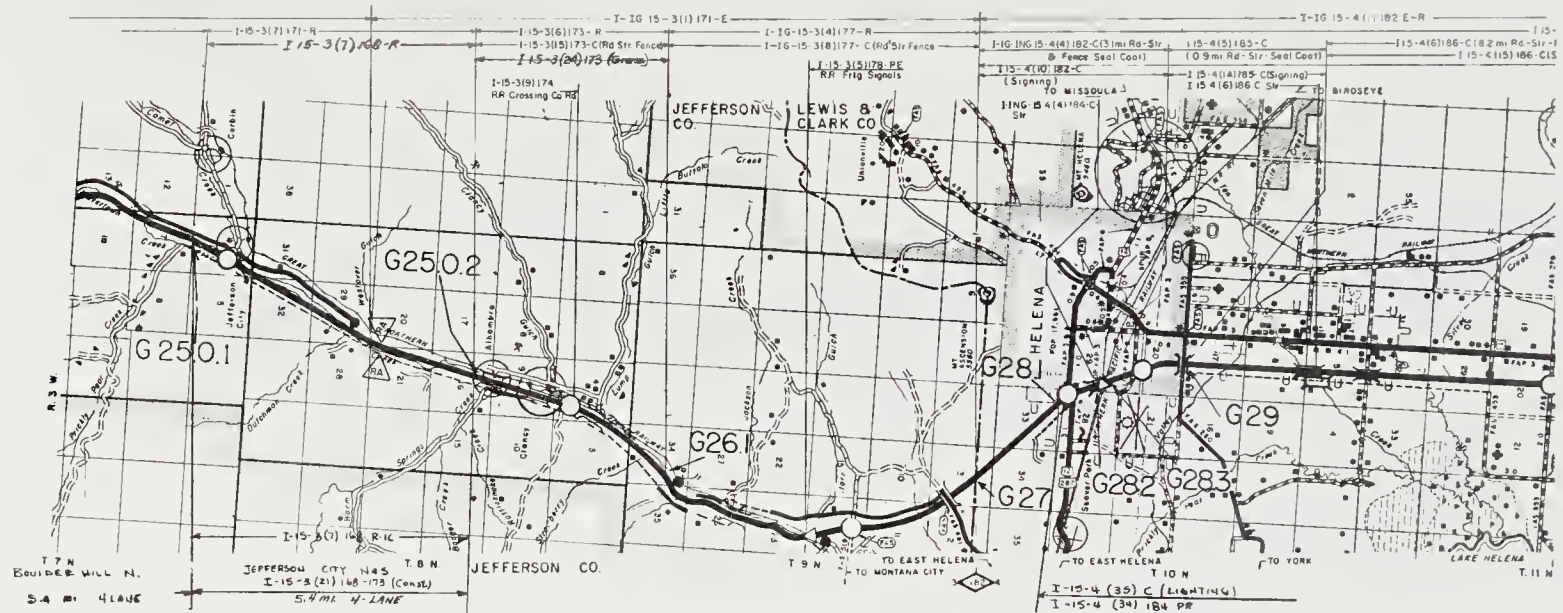


SCALE IN MILES
0 1 2 3 4

MONTANA



INTERSTATE ROUTE 15

Sheet 4 of 8

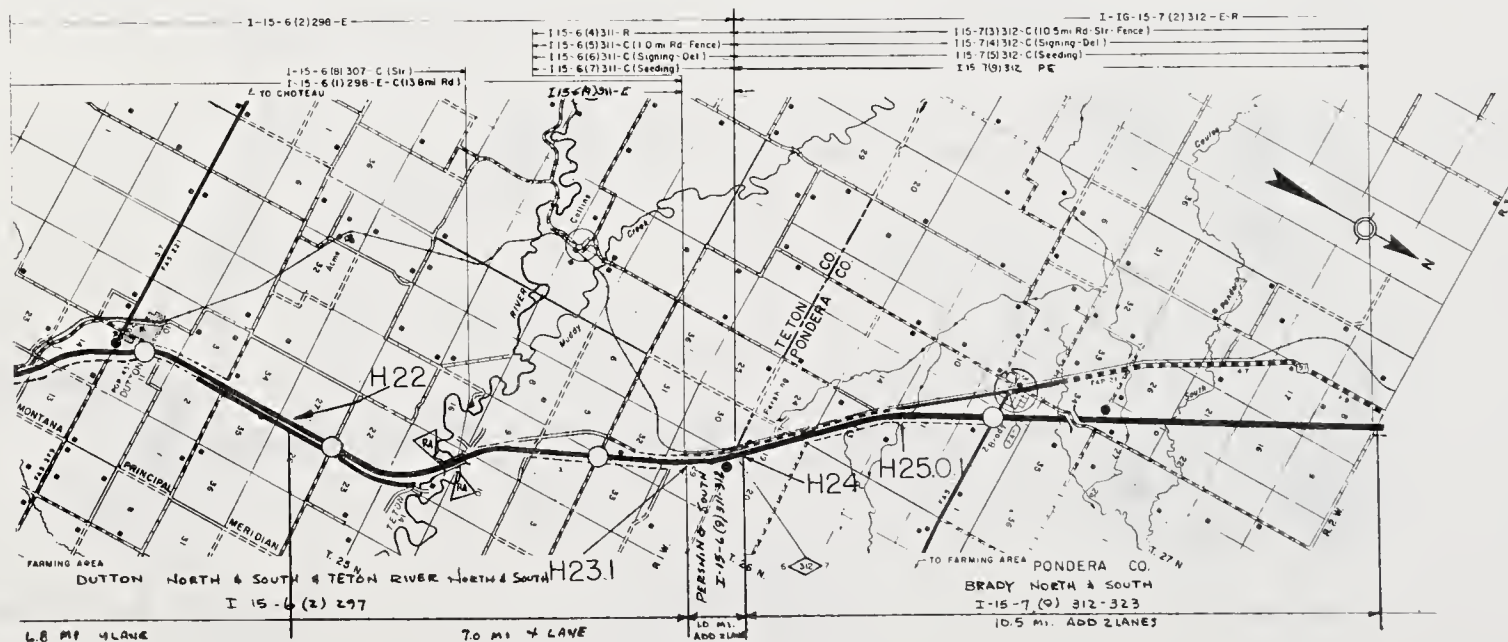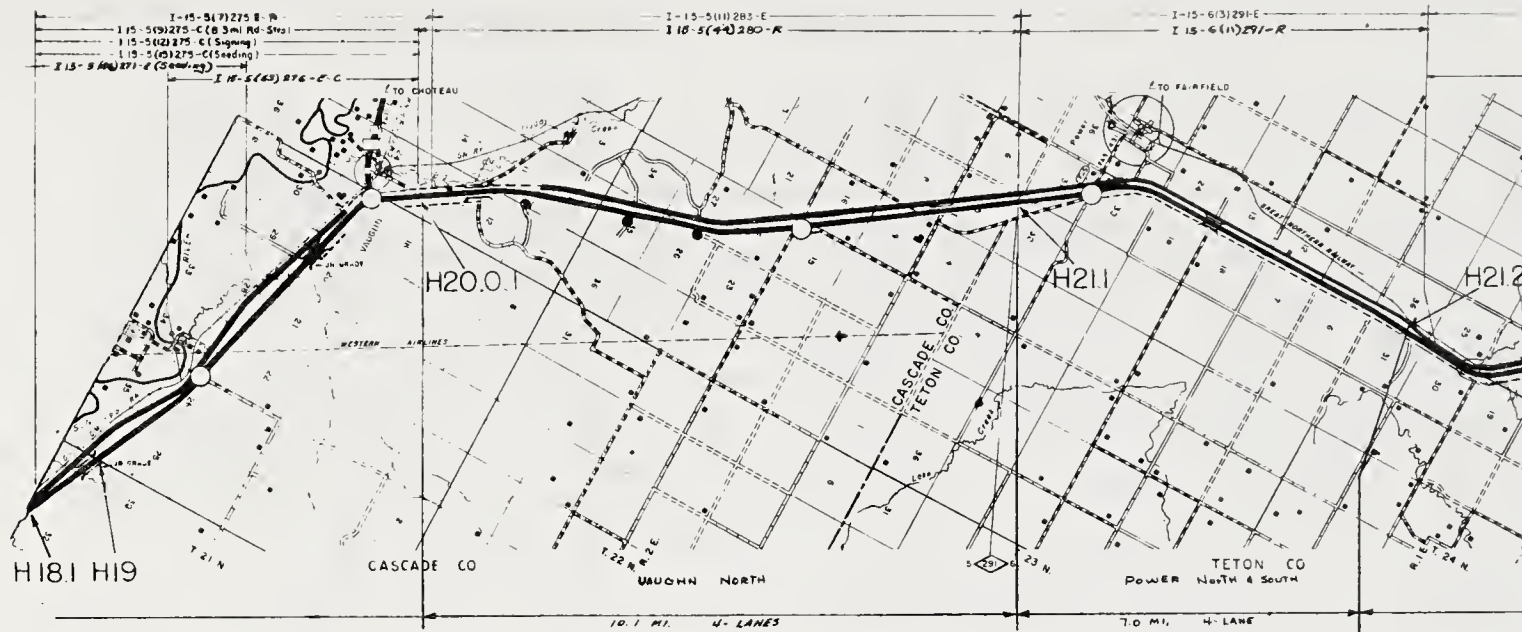



SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 15
Sheet 6 of 8

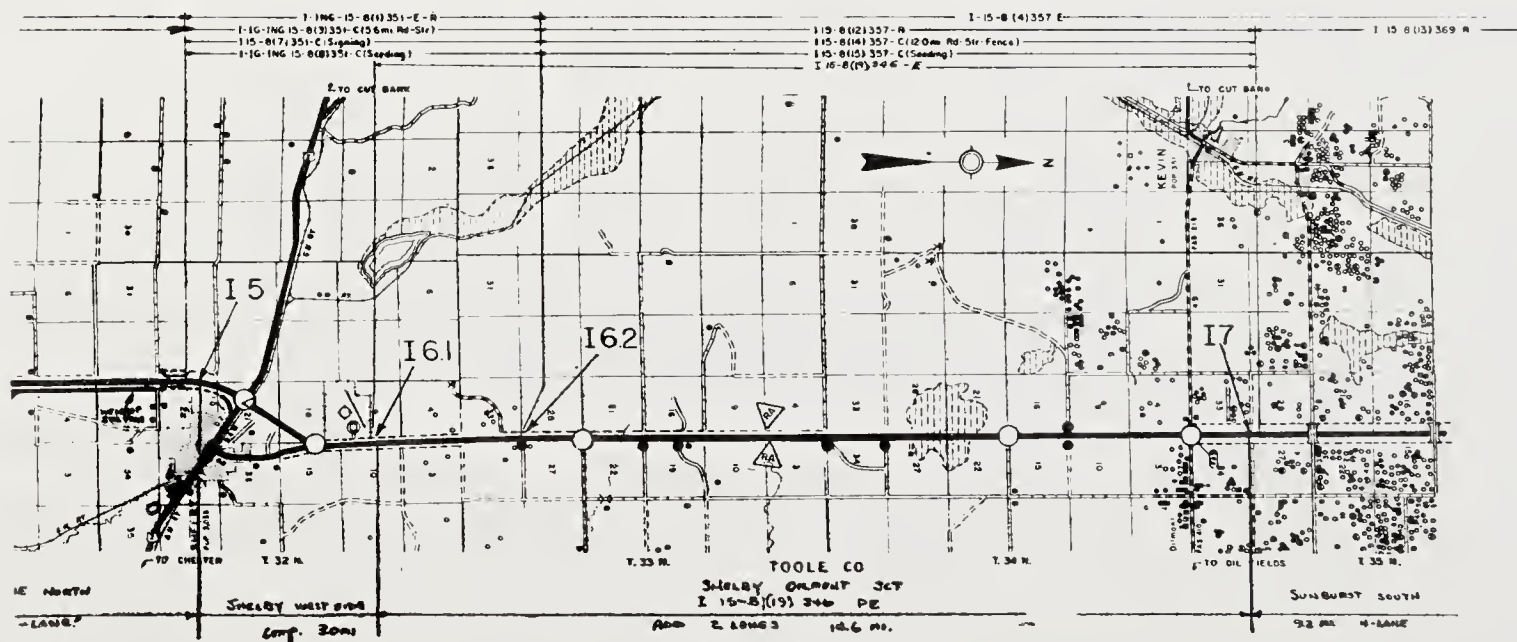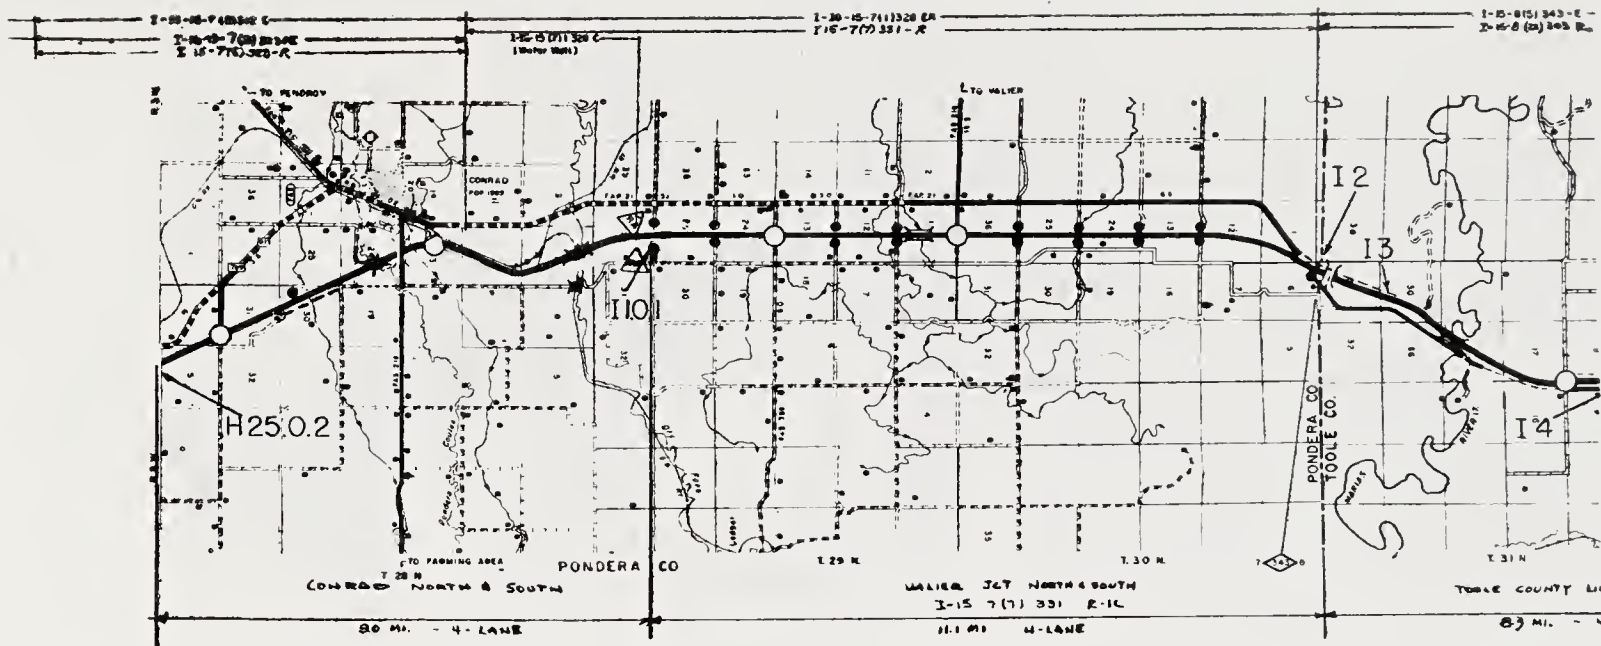

SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 15
Sheet 7 of 8

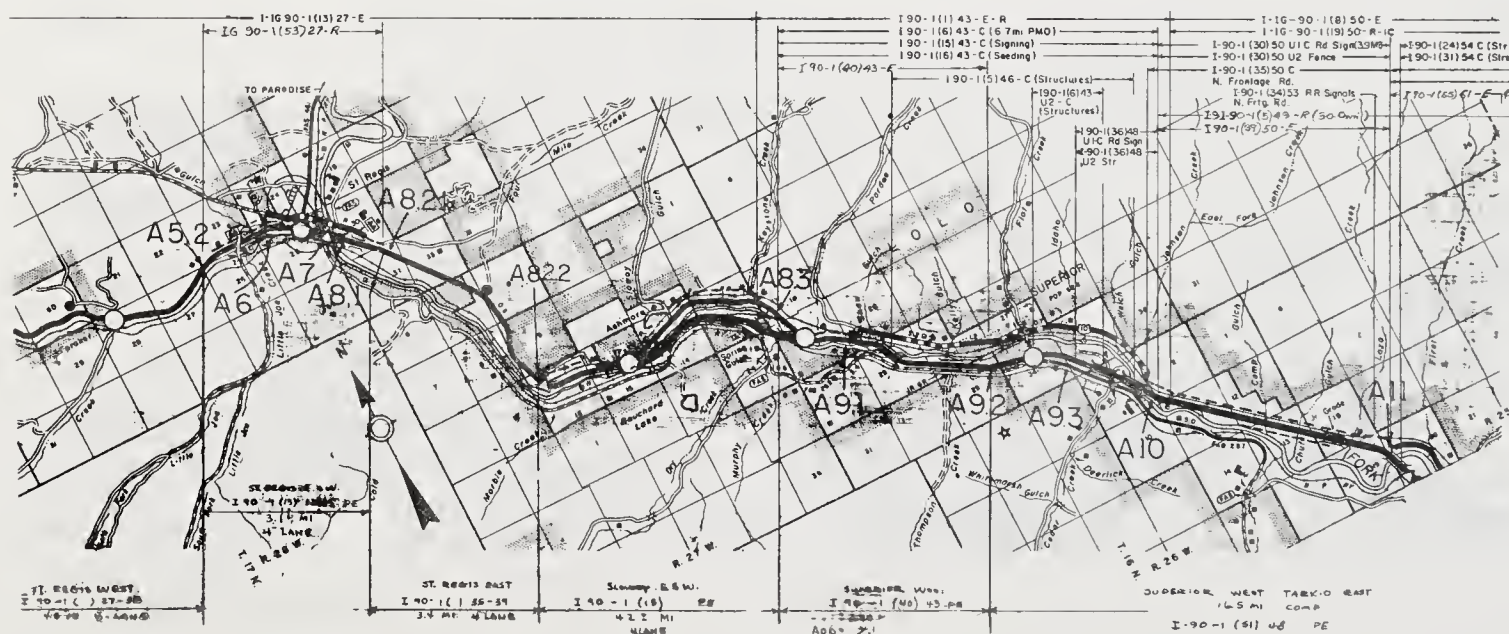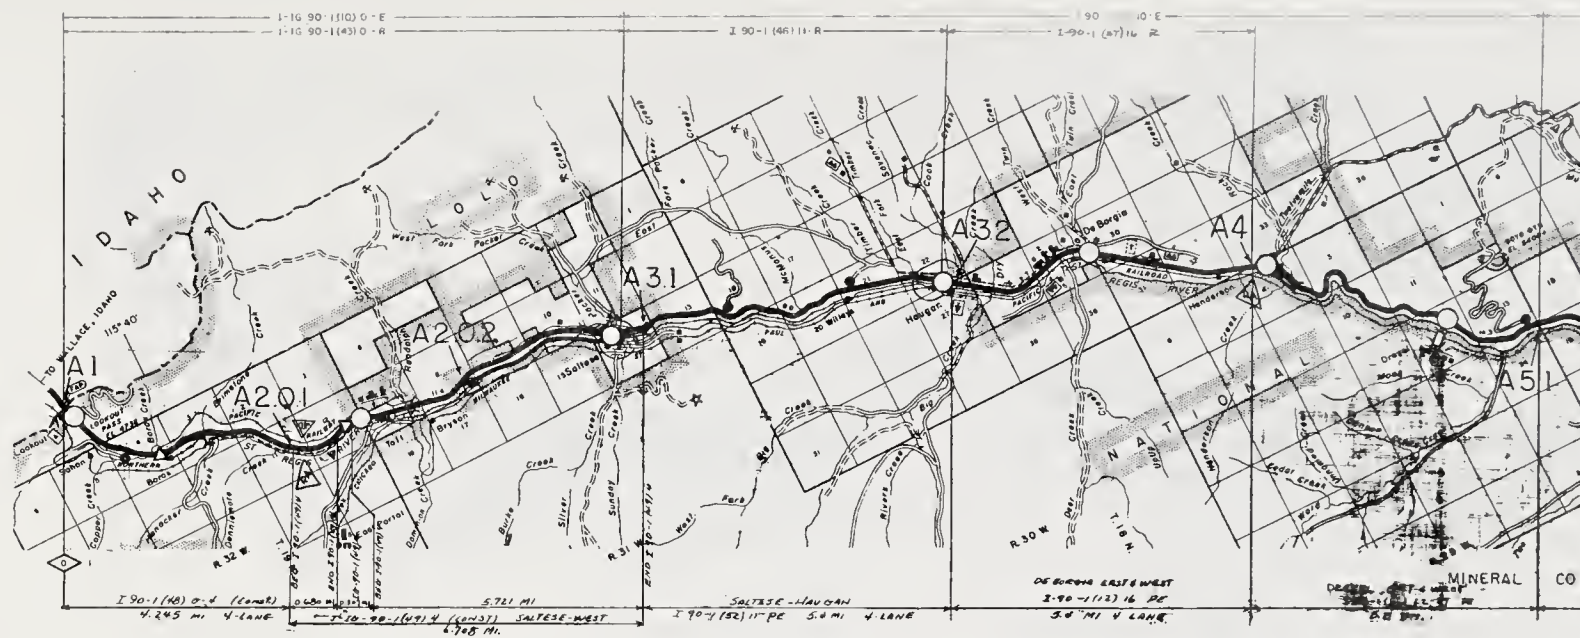

LEGEND FOR INTERSTATE ROUTES

- INTERSTATE LOCATION STEP 4-5
- INTERSTATE LOCATION STEP 1-2-3
- INTERCHANGE
- HIGHWAY GRADE SEPARATION NO CONNECTION
- RAILROAD GRADE SEPARATION
- COMBINATION HIGHWAY-RAILROAD GRADE SEPARATION
- OTHER BRIDGE
- TUNNEL
- TOLL BRIDGE, TUNNEL, HIGHWAY OR COMBINATION
- FRONTAGE ROAD
- TERMINATED CROSS ROAD
- INTERSECTION ST. GRADE
- U U URBAN AREA BOUNDARY
- POST MILEAGE
- ROUTE SECTIONS



SCALE IN MILES

0 1 2 3 4

MONTANA



INTERSTATE ROUTE 90



Sheet 1 of 11

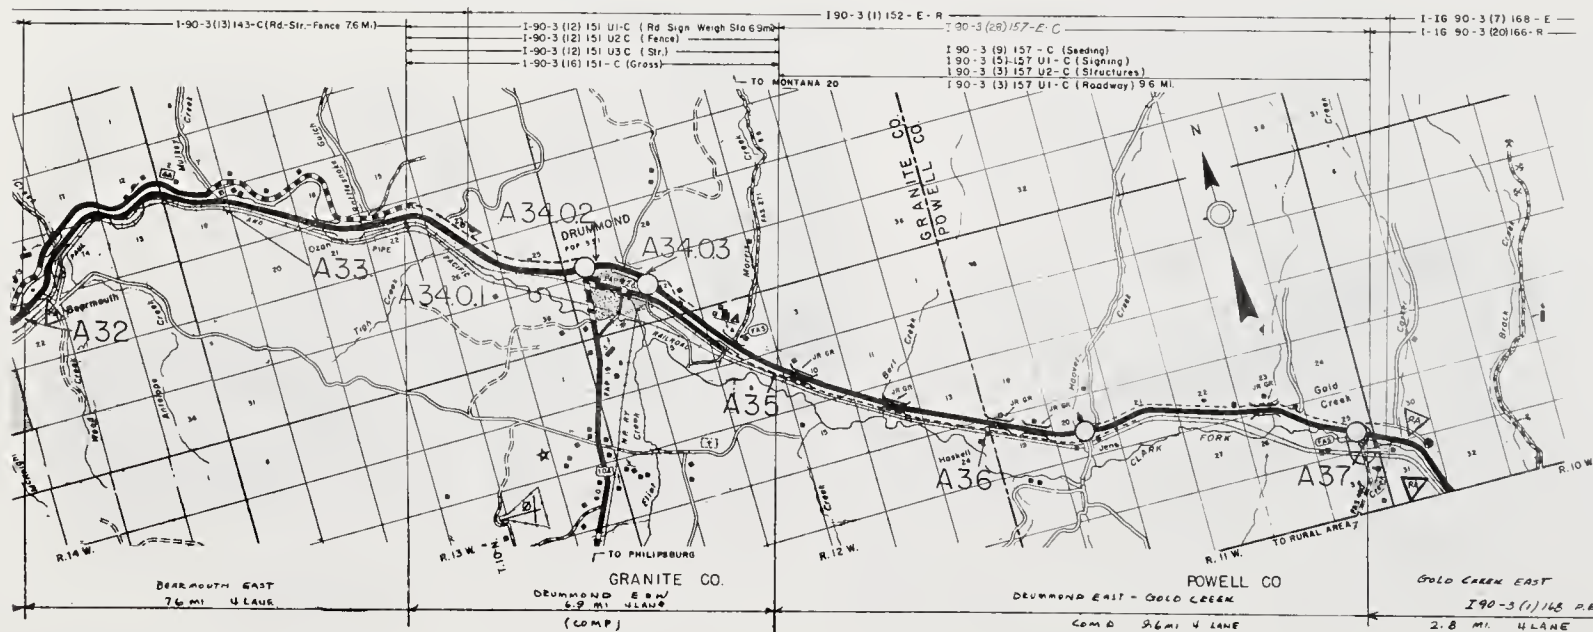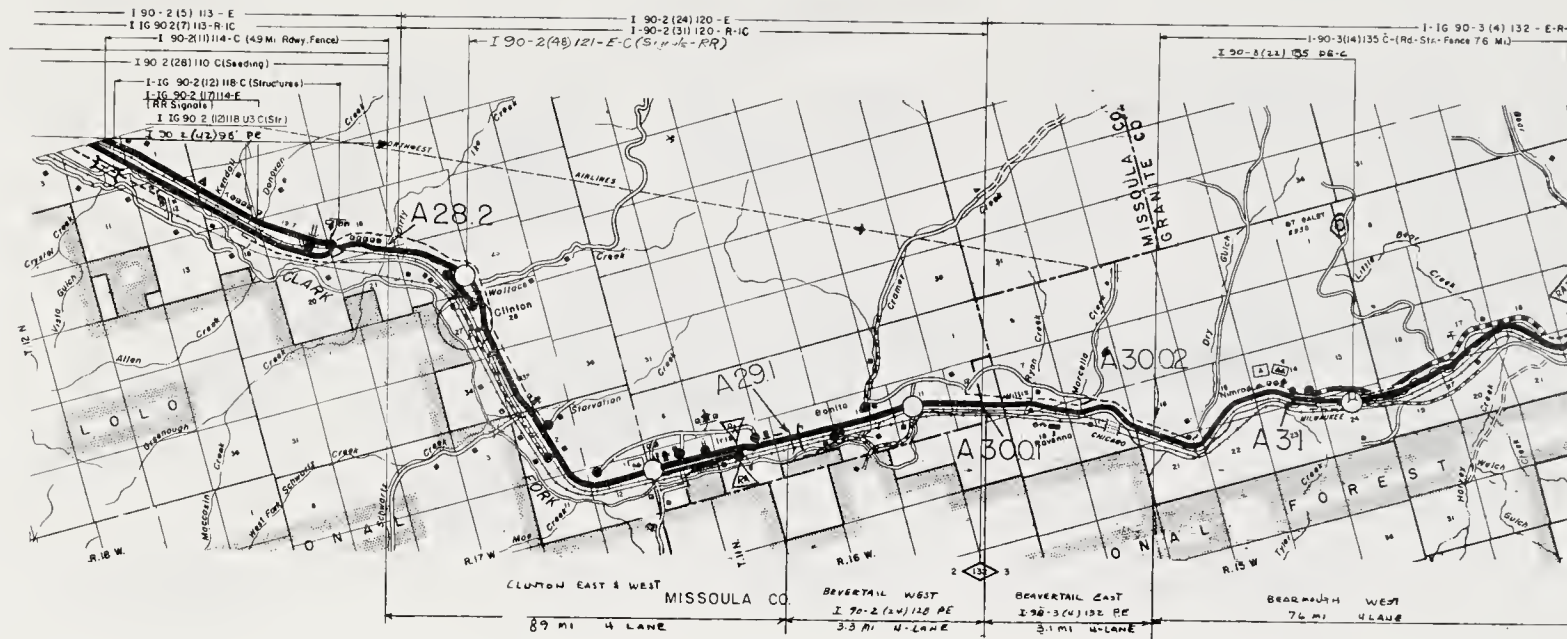

SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 90
Sheet 3 of 11

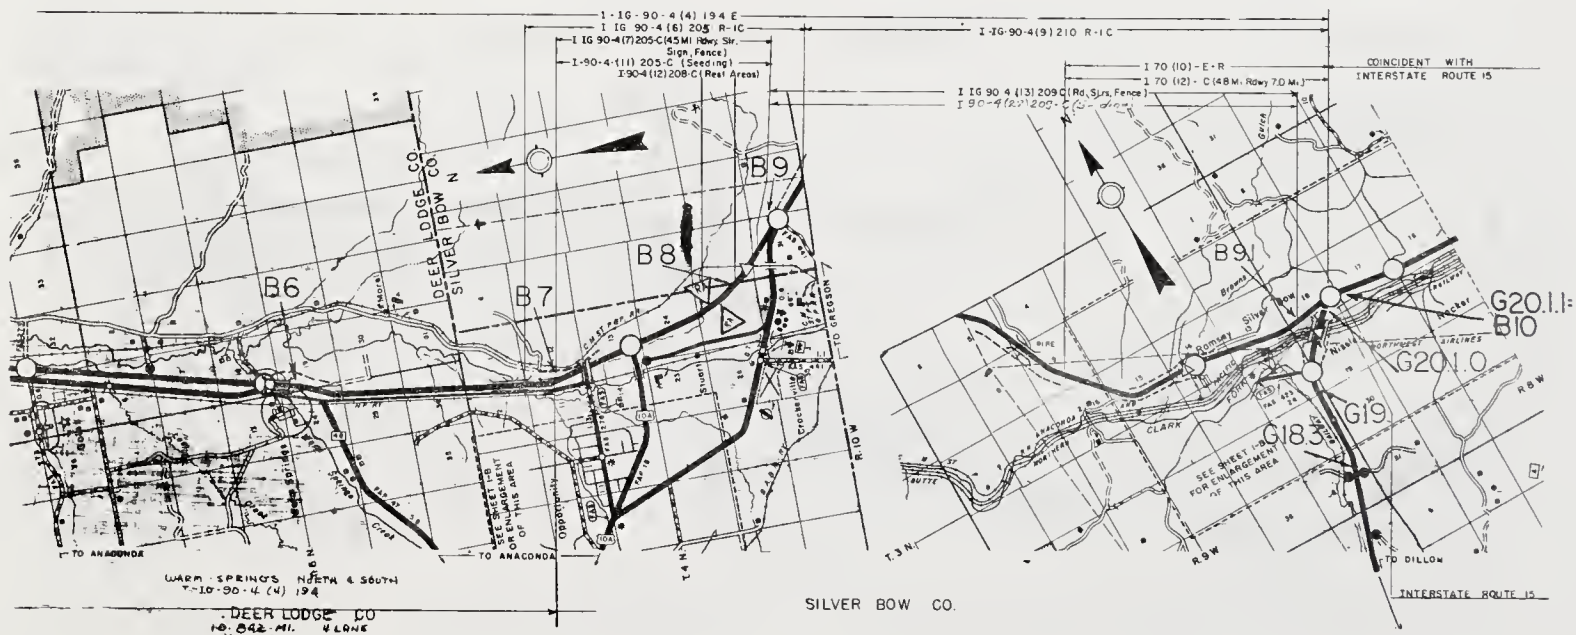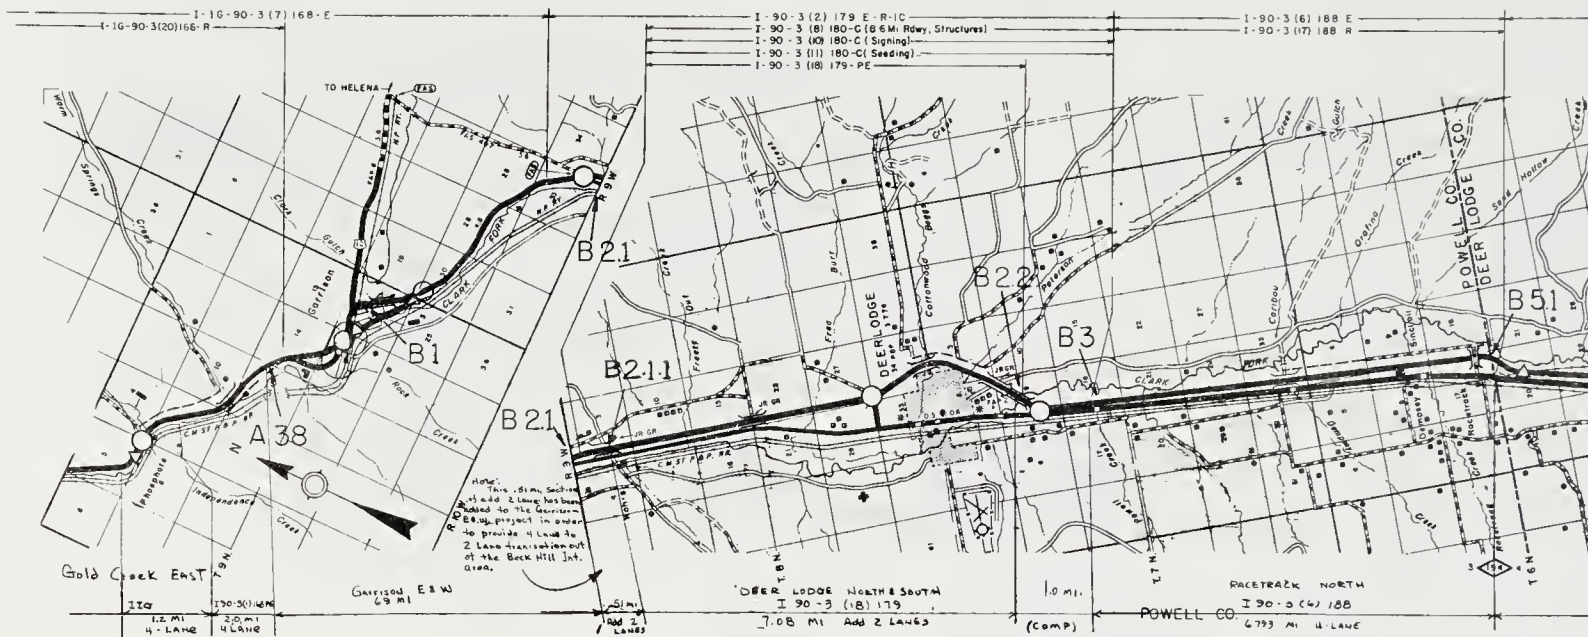

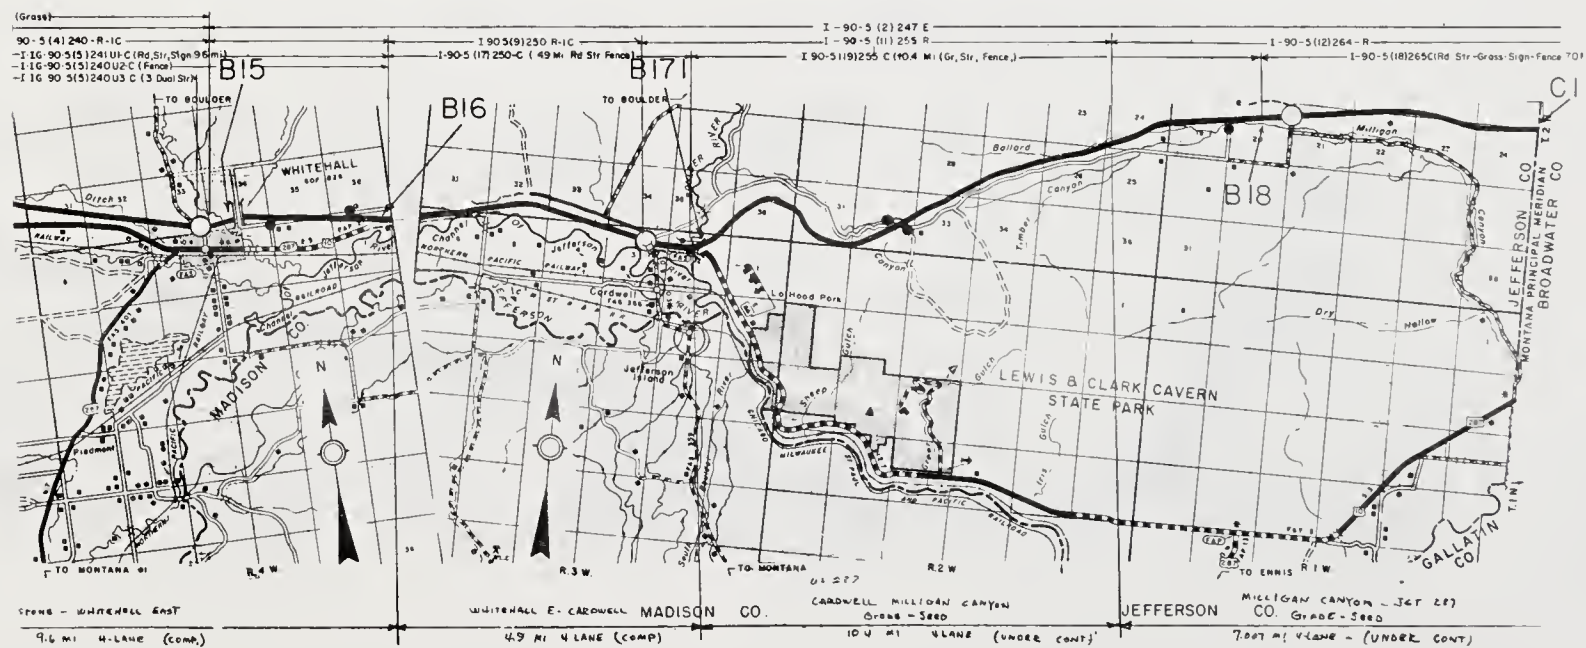
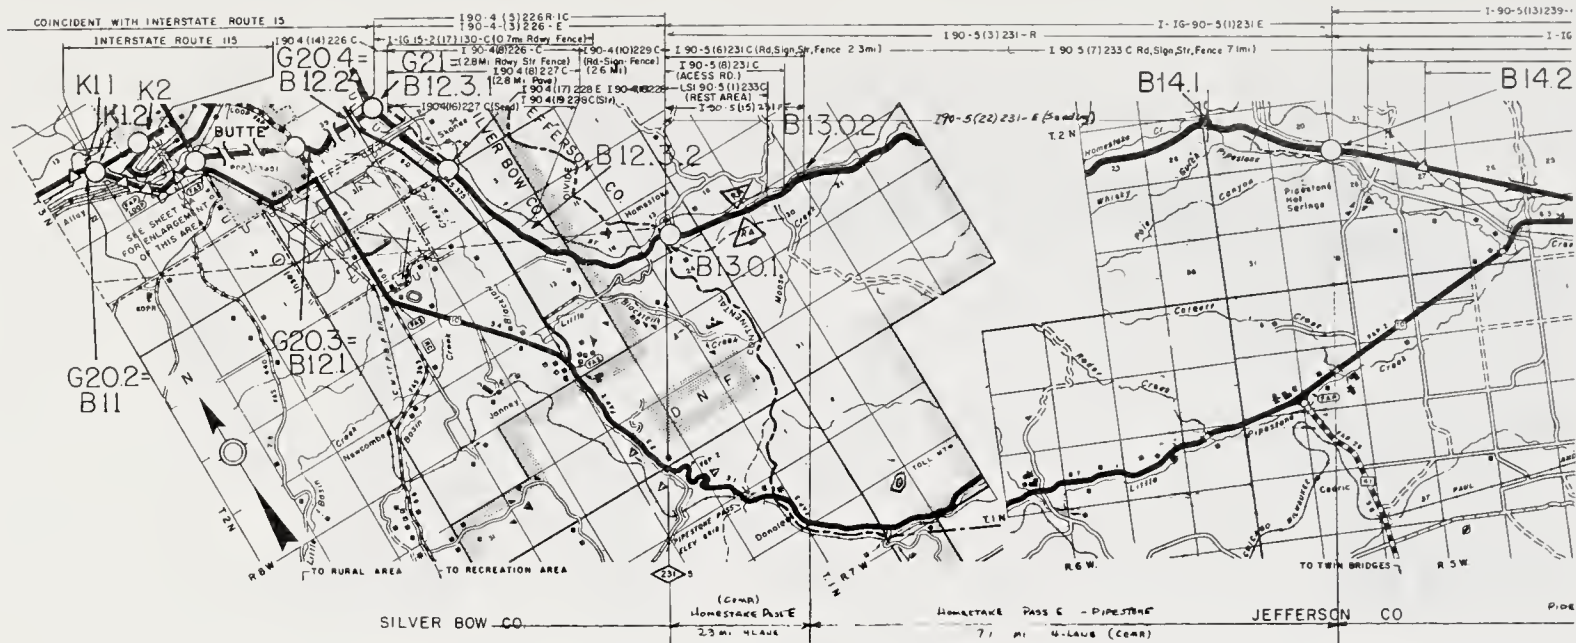


SCALE IN MILES

MONTANA



INTERSTATE ROUTE 90

Sheet 5 of 11

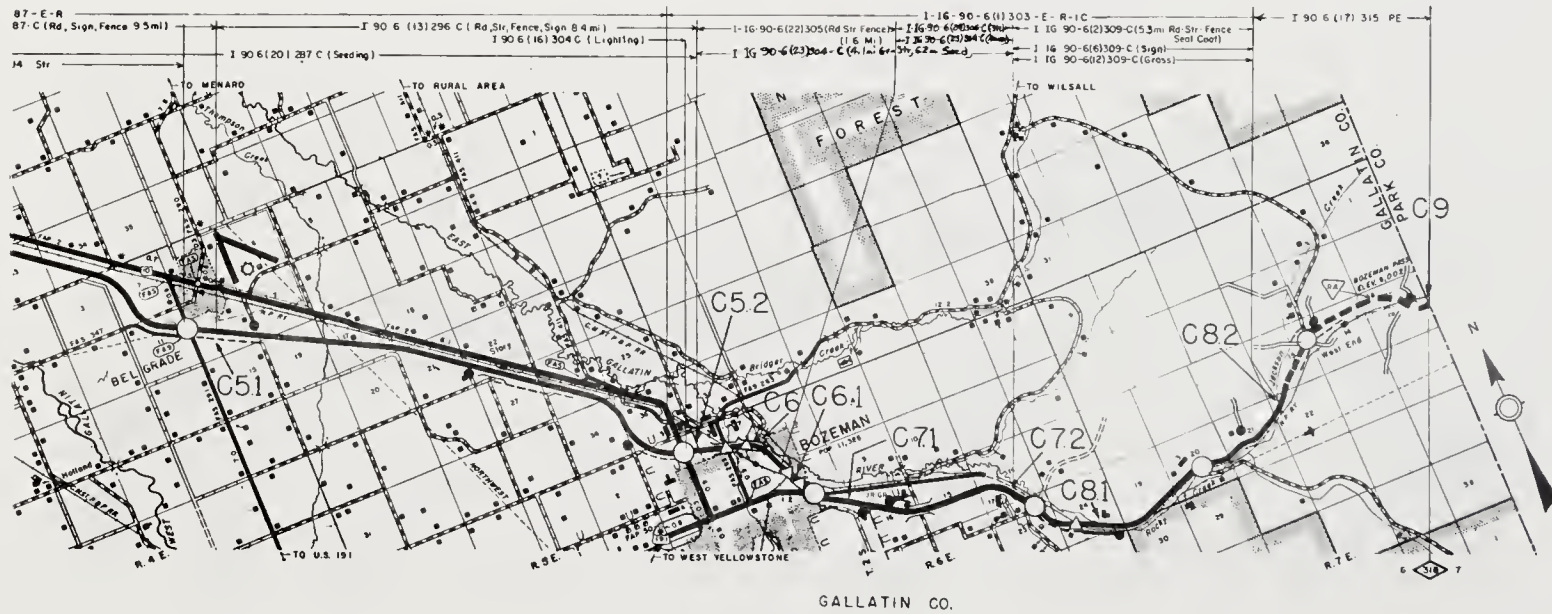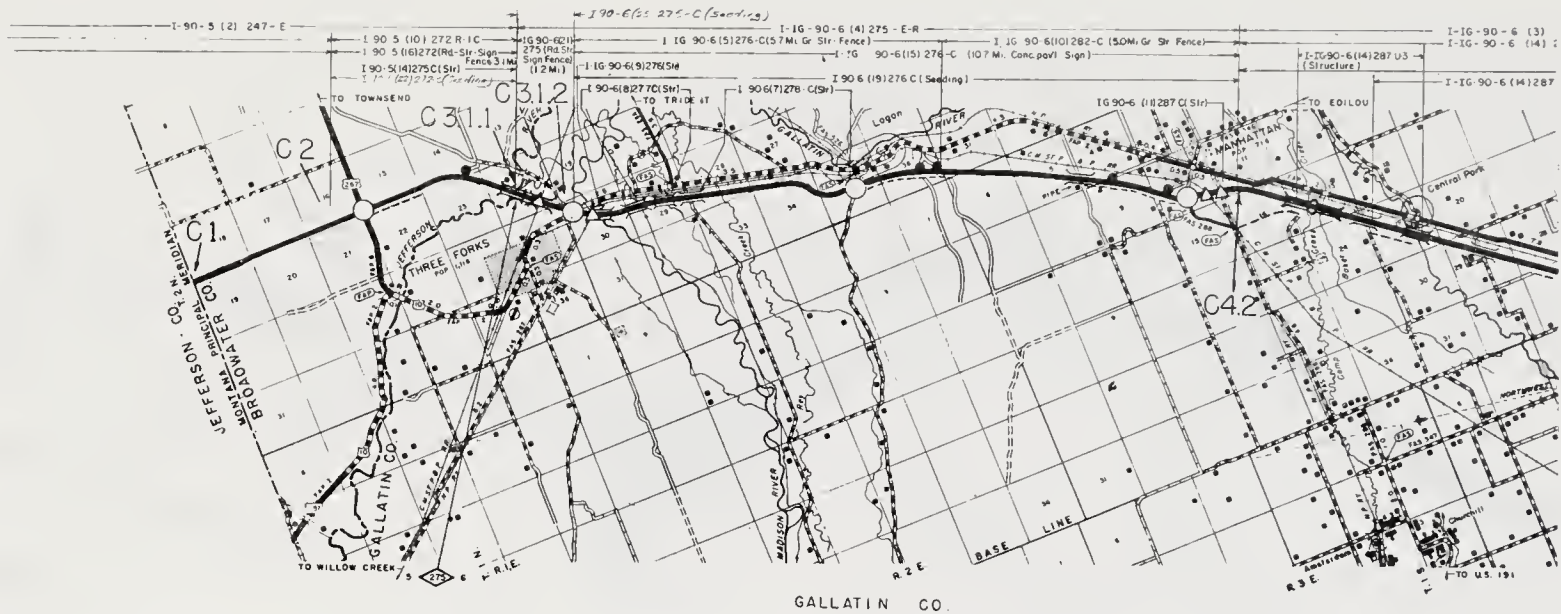

SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 90
Sheet 6 of 11

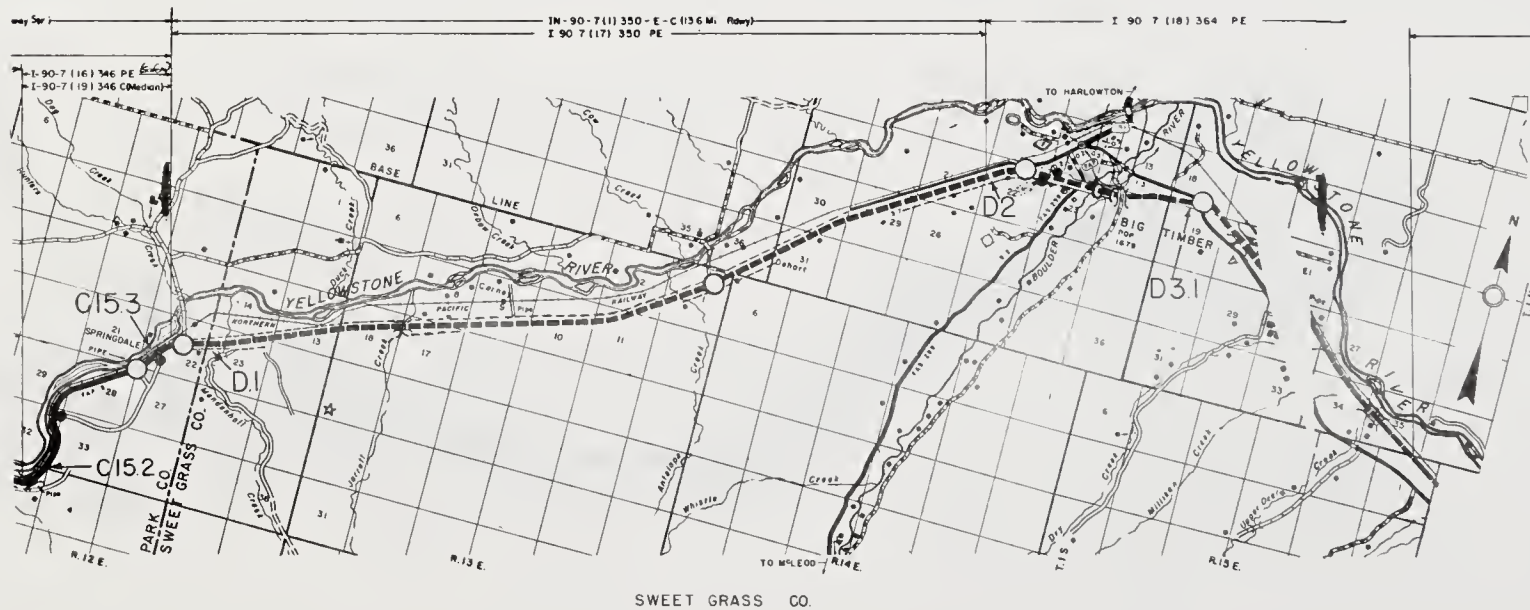
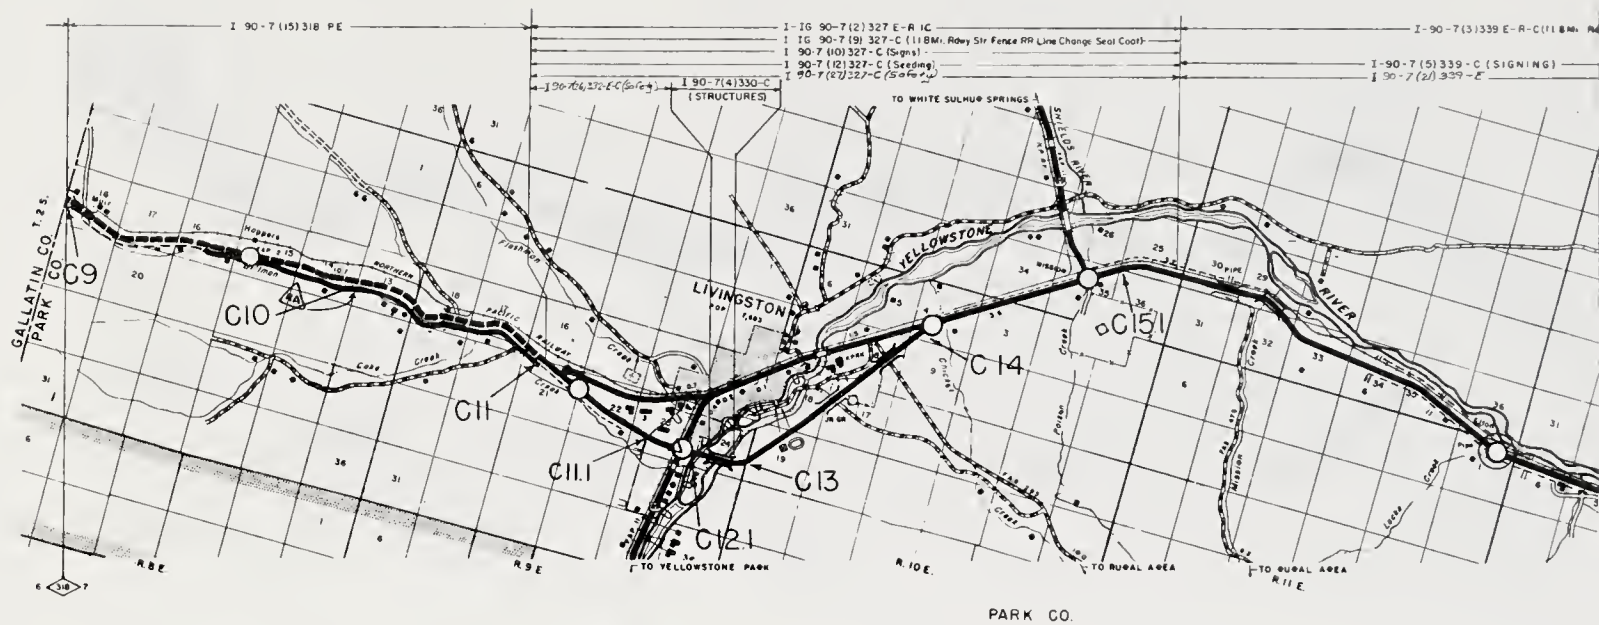


SCALE IN MILES
0 1 2 3 4

MONTANA

INTERSTATE ROUTE 90

Sheet 7 of 11

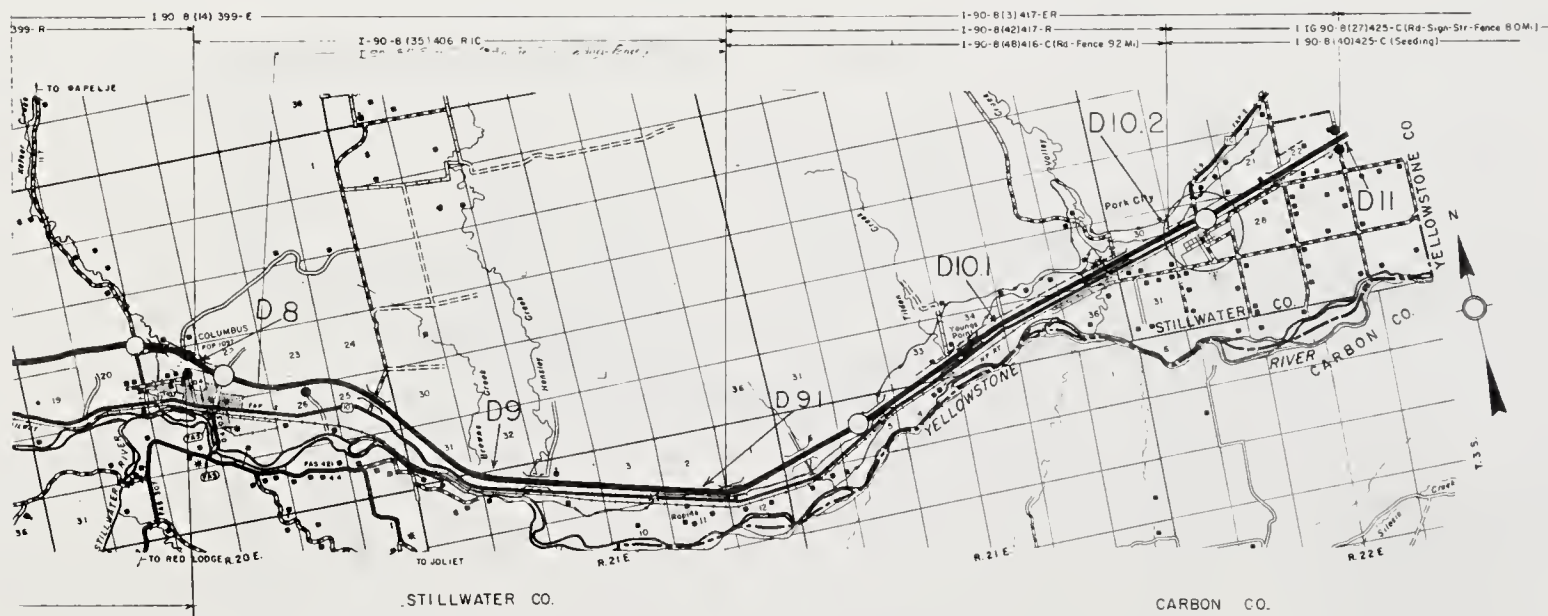
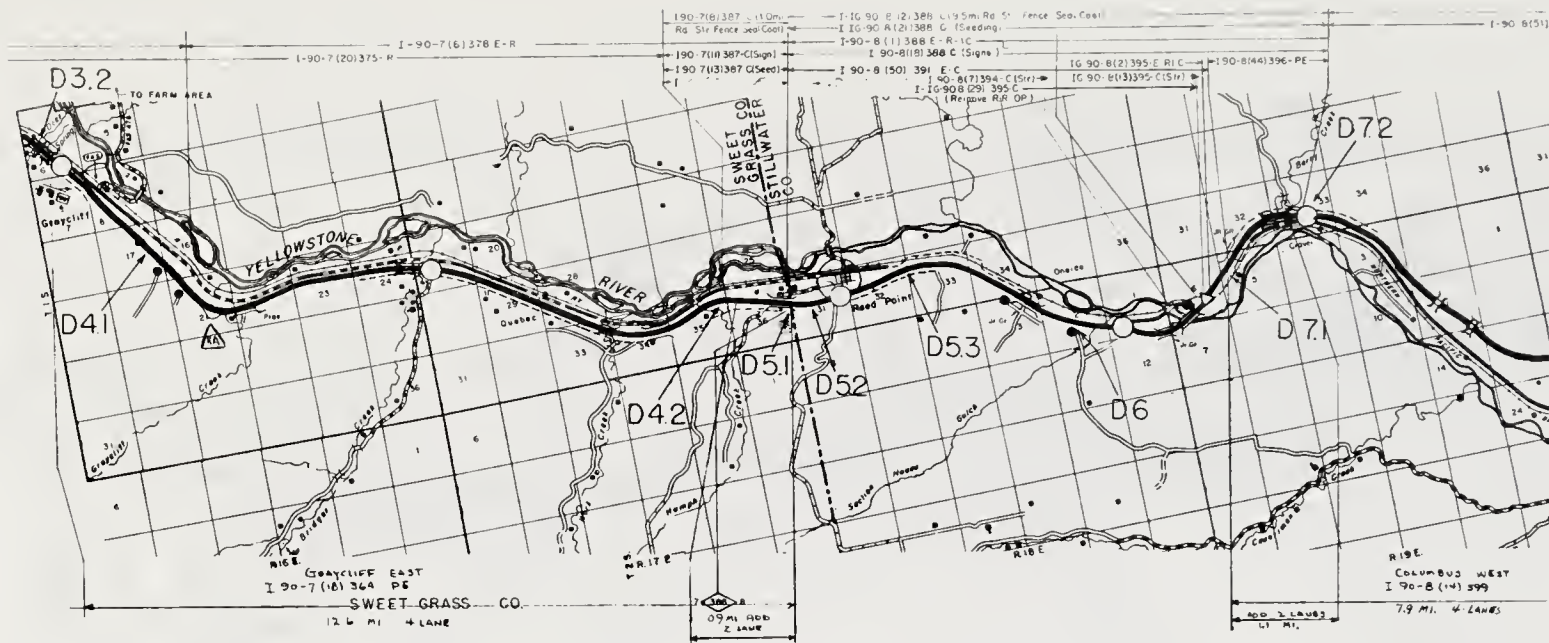


SCALE IN MILES
0 1 2 3 4

MONTANA


INTERSTATE ROUTE 90

Sheet 8 of 11

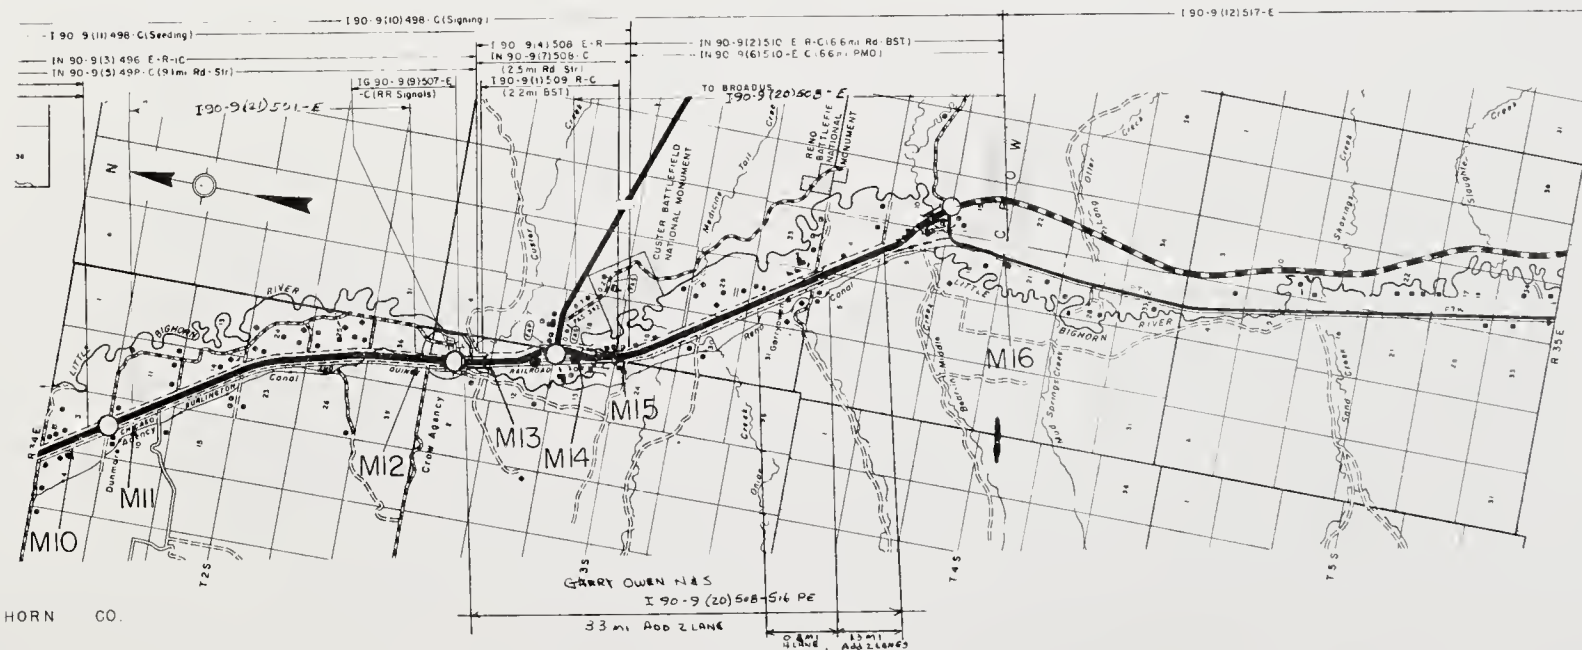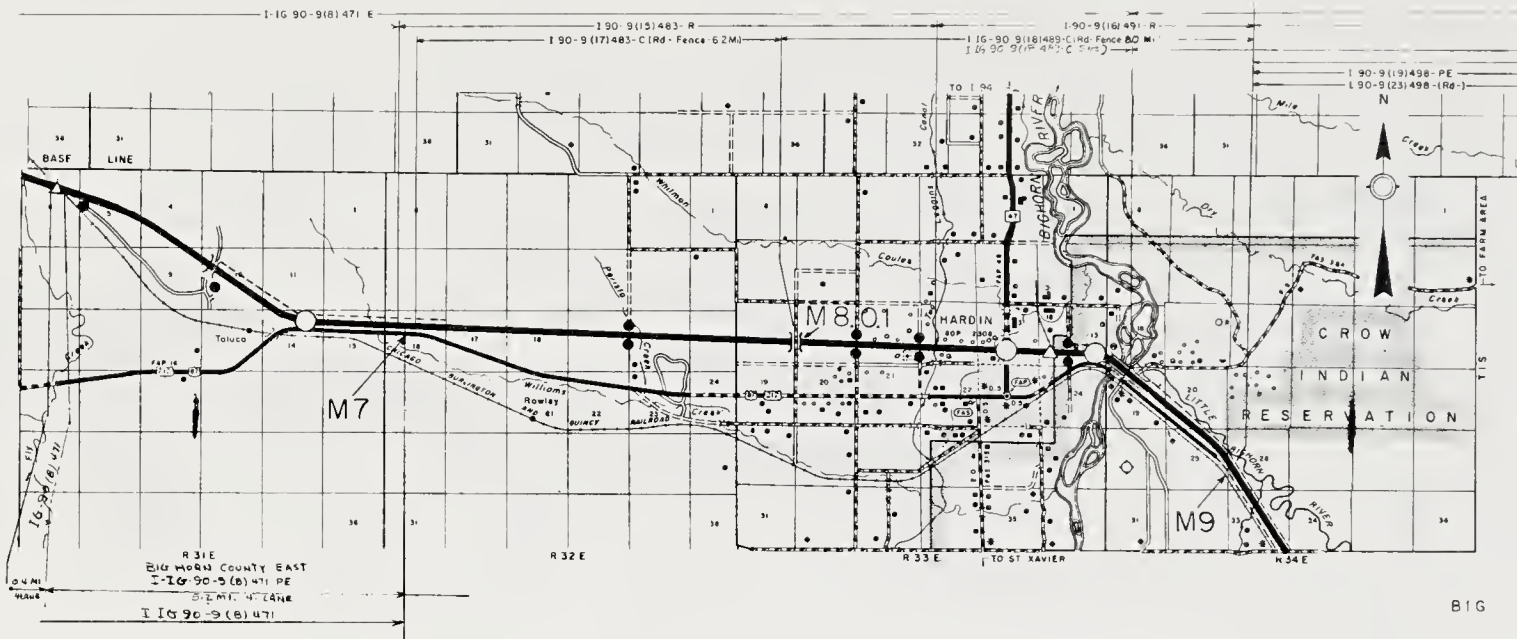

SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 90
Sheet 10 of 11

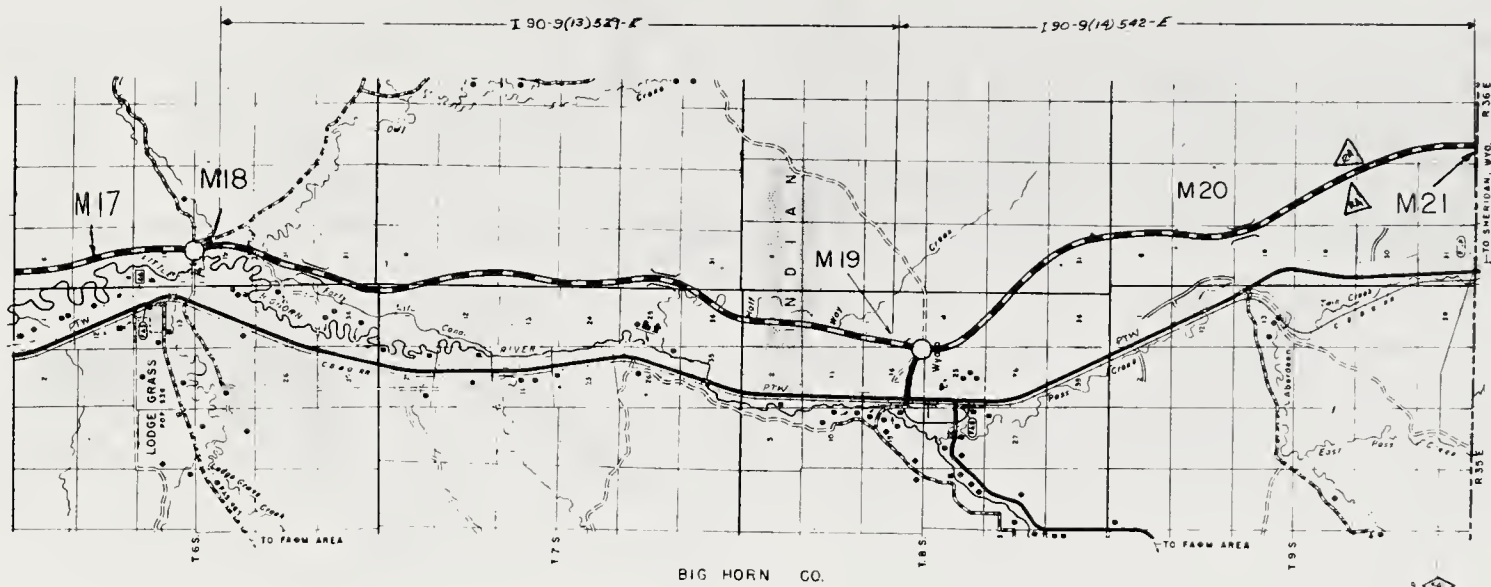



W Y O M I N G



SCALE IN MILES
0 1 2 3 4

MONTANA
INTERSTATE ROUTE 90
Sheet 11 of 11



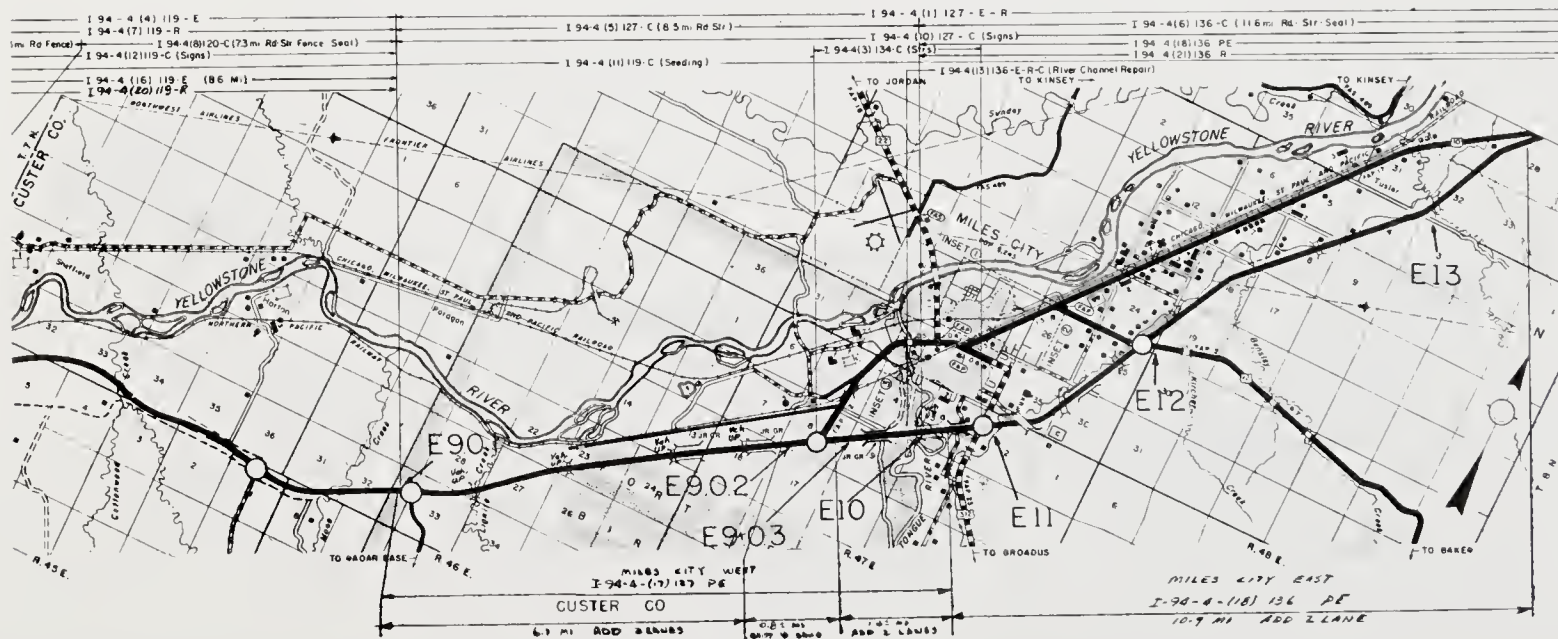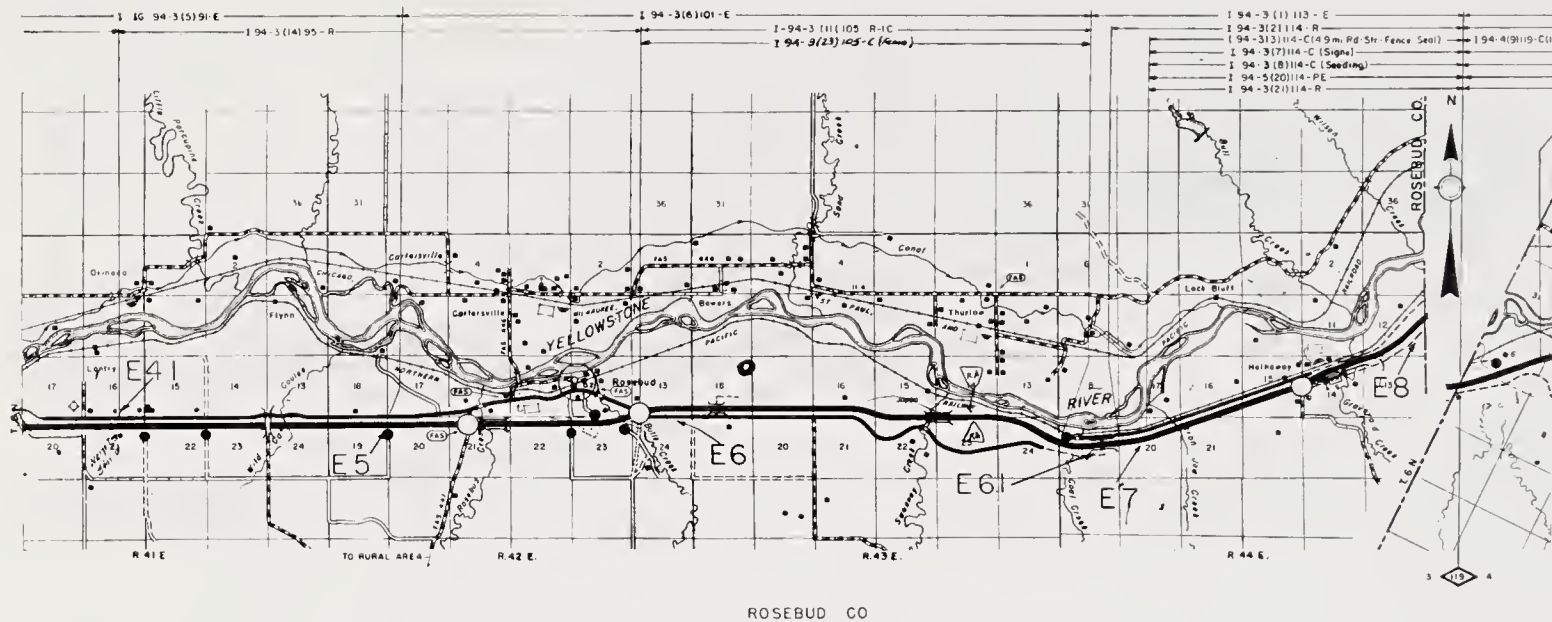




Small, illegible text or markings in the bottom left corner, possibly a signature or a reference code.

PRIMARY




BEGINNING MILE POST	0.0	3.7	7.0		15.3	16.9	21.5	25.4		33.0	35.7	44.3	49.2	56.1	64.8	71.6	78.2	BEGINNING MILE POST
LENGTH	3.8	3.2	7.0		1.7	4.6	3.9	6.4		2.7	8.5	5.0	6.9	8.7	6.8	6.6	2.1	LENGTH
YEAR BUILT	54	49	47		37	34	37	38		35	36	36	35	38	41	37	37	YEAR BUILT
YEAR IMPROVED	55	51	51		38	38	39	48		48	38	39	39	40	43	40	40	YEAR IMPROVED
SURFACE WIDTH	24	22	22		24	22	22	22		24	22	22	22	22	22	22	22	SURFACE WIDTH
ROADWAY WIDTH	30	30	30		26	24	26	24		30	24	24	24	26	28	26	26	ROADWAY WIDTH
FOUNDATION - 10	6	5	7	N	0	0	0	0	N	0	0	0	0	0	3	0	0	FOUNDATION - 10
SURFACE - 30	17	14	16	A	15	11	11	11	A	9	10	12	10	12	12	11	10	SURFACE - 30
DRAINAGE - 10	9	8	8	B	5	3	4	3	B	7	7	5	4	6	7	5	6	DRAINAGE - 10
SAFETY - 20	4	2	7	R	1	2	1	1	R	1	1	2	2	4	5	2	2	SAFETY - 20
ADT 1968	720	740	1341	D	1487	1283	1587	4007	D	5244	1060	860	773	758	731	714	637	ADT 1968
DESIGN HOUR VOLUME	90	100	200		200	170	200	520		680	130	110	100	100	100	90	90	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	238	324	416		456	273	480	479		622	526	451	526	330	342	230	239	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	24	25	23		23	21	24	14		14	26	26	27	26	26	25	24	CAPACITY RATING - 30
SUFFICIENCY RATING	61	55	61		44	37	40	29		31	44	45	43	48	53	43	42	SUFFICIENCY RATING
ADJUSTED RATING	61	55	56		39	33	35	19		18	41	44	43	48	53	43	42	ADJUSTED RATING

BEGINNING MILE POST	667.1
LENGTH	0.3
YEAR BUILT	38
YEAR IMPROVED	38
SURFACE WIDTH	42
ROADWAY WIDTH	42
FOUNDATION - 10	6
SURFACE - 30	16
DRAINAGE - 10	7
SAFETY - 20	1
ADT 1968	1090
DESIGN HOUR VOLUME	260
HOURLY SERVICE VOLUME	503
CAPACITY RATING - 30	22
SUFFICIENCY RATING	52
ADJUSTED RATING	49

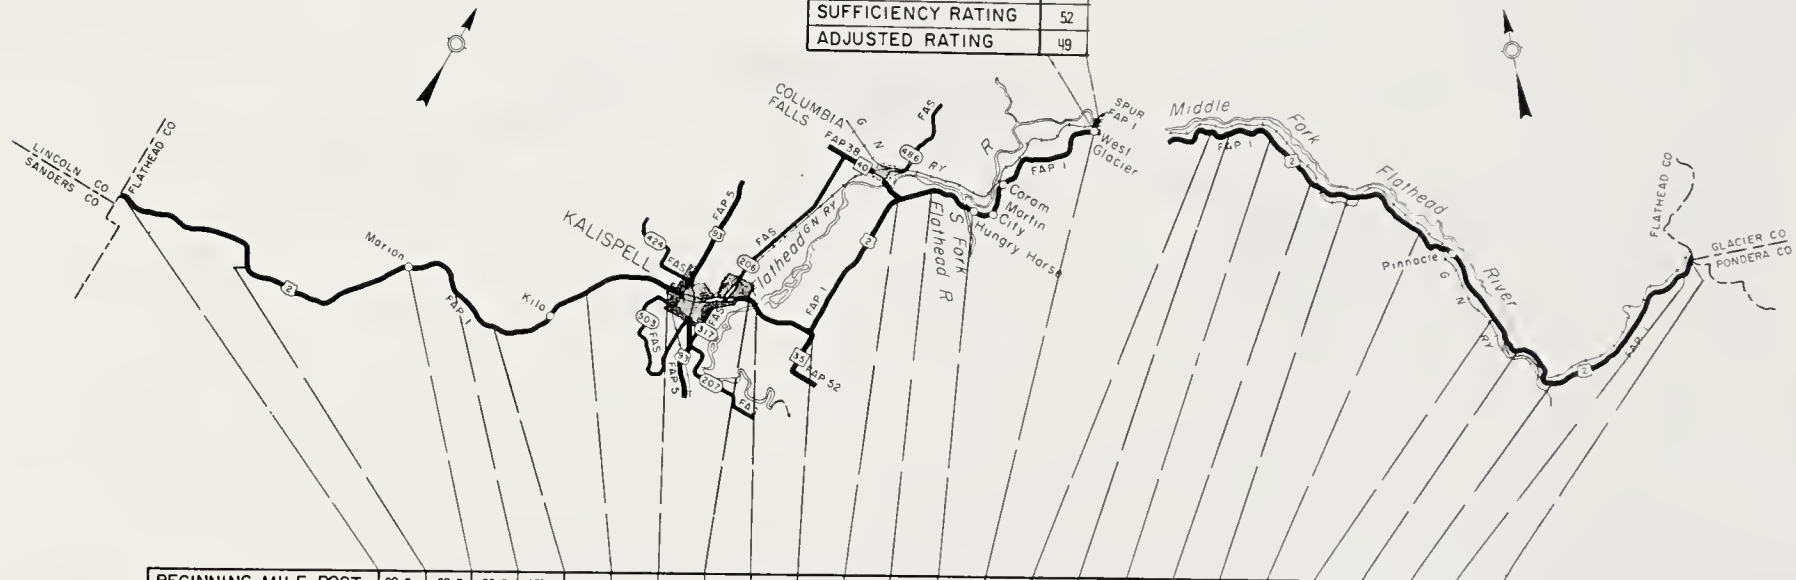


BEGINNING MILE POST	80.3	89.5	99.3	103.1	106.4	113.3			124.1	124.6	128.3	138.4	140.0	142.5	153.3	156.6	157.1	159.5	164.7	166.2	171.1	177.6	180.6	184.2	197.2	BEGINNING MILE POST
LENGTH	9.2	9.8	3.8	3.3	6.9	6.0			0.5	3.6	10.1	1.7	2.4	10.9	3.2	0.5	2.3	5.2	1.5	4.9	6.5	2.9	3.6	12.3	0.6	LENGTH
YEAR BUILT	52	36	47	40	49	49			67	40	34	34	29	31	48	65	48	49	67	57	66	33	67	52		YEAR BUILT
YEAR IMPROVED	52	50	47	50	49	51			67	50	51	51	65	34	49	65	49	59	67	59	66	35	67	53		YEAR IMPROVED
SURFACE WIDTH	28	22	24	22	24	24			44	24	22	22	24	22	24	24	24	24	26	26	32	20	32	26		SURFACE WIDTH
ROADWAY WIDTH	30	26	26	24	26	30			44	30	26	26	30	26	28	28	28	26	30	32	32	24	32	28		ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	0	5	U R B A N		10	5	2	4	10	0	8	9	7	7	9	8	10	0	10	4		FOUNDATION - 10
SURFACE - 30	13	8	10	9	13	15			30	13	12	13	19	12	17	28	15	17	28	23	29	6	30	13		SURFACE - 30
DRAINAGE - 10	7	6	7	8	8	8			10	8	8	8	10	5	7	10	7	8	10	10	10	3	10	10		DRAINAGE - 10
SAFETY - 20	5	2	3	1	3	2			0	1	5	1	1	1	6	20	2	5	20	5	13	1	8	0		SAFETY - 20
ADT 1968	825	880	995	1092	1316	1921			2381	2381	2146	3469	3168	2867	673	657	650	627	599	596	581	566	566	568		ADT 1968
DESIGN HOUR VOLUME	110	110	130	140	170	230			330	380	340	700	640	580	140	130	130	130	120	120	120	110	100	110		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	495	450	561	423	198	452			561	749	428	265	494	415	357	378	531	643	428	283	354	237	275	576		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	26	27	25	17	22			21	22	18	0	11	9	24	25	26	27	26	24	25	23	25	27		CAPACITY RATING - 30
SUFFICIENCY RATING	52	42	47	43	41	52			71	49	45	26	51	27	62	92	57	64	93	70	87	33	83	54		SUFFICIENCY RATING
ADJUSTED RATING	51	41	45	40	37	45			64	40	37	17	40	19	63	92	58	65	93	71	88	35	84	56		ADJUSTED RATING

BEGINNING MILE POST	667.4	669.7	670.3
LENGTH	2.3	0.6	9.1
YEAR BUILT	29	66	29
YEAR IMPROVED	35	66	35
SURFACE WIDTH	18	28	18
ROADWAY WIDTH	22	28	22
FOUNDATION - 10	0	10	0
SURFACE - 30	10	30	7
DRAINAGE - 10	3	10	3
SAFETY - 20	1	20	3
ADT 1968	390	335	210
DESIGN HOUR VOLUME	90	80	90
HOURLY SERVICE VOLUME	370	474	350
CAPACITY RATING - 30	26	27	26
SUFFICIENCY RATING	40	97	39
ADJUSTED RATING	45	97	48

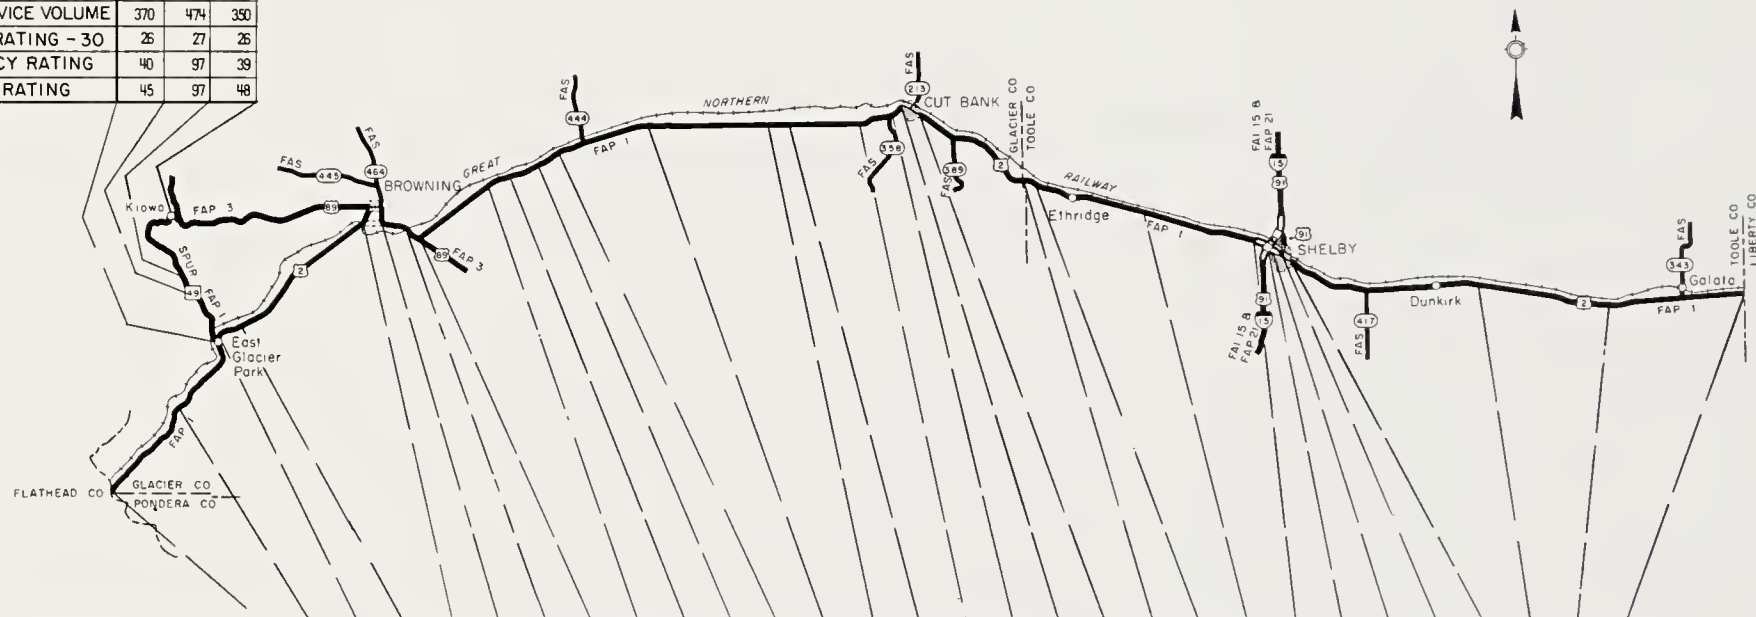

BEGINNING MILE POST	198.0	204.4	209.3	210.1	220.5	221.8	223.7	224.0	228.8	229.9	231.9	233.1	240.2	246.5	247.0	252.0	254.2		255.8	262.8	263.1	271.0	278.0	278.4	278.7		280.1	291.7	299.7	BEGINNING MILE POST
LENGTH	6.4	4.9	0.9	10.4	1.3	1.9	0.3	4.8	1.1	2.1	1.2	7.1	6.3	0.5	5.0	2.1	0.6		7.0	0.3	7.5	7.1	0.4	0.3	0.4		11.6	8.0	7.3	LENGTH
YEAR BUILT	52	63	63	39		32	60	35	35	35	25	25	27	61	27	27	55		67	67	65	53	60	60	56		54	56	57	YEAR BUILT
YEAR IMPROVED	63	63	63	53		53	60	61	50	63	61	60	61	61	67	55			67	67	65	66	60	60	56		59	59	62	YEAR IMPROVED
SURFACE WIDTH	26	32	32	24		22	32	22	32	22	24	22	22	32	22	24	42		40	40	32	24	60	60	60		32	32	32	SURFACE WIDTH
ROADWAY WIDTH	28	32	32	32		24	32	24	32	24	30	24	24	32	24	26	44		40	40	32	32	60	60	60		32	32	32	ROADWAY WIDTH
FOUNDATION - 10	4	8	10	6		0	9	0	6	0	8	0	0	8	0	0	7		10	10	10	6	8	8	8		7	6	7	FOUNDATION - 10
SURFACE - 30	14	22	24	16		9	23	12	17	14	17	12	11	18	12	14	17		30	30	30	17	24	24	16		20	20	23	SURFACE - 30
DRAINAGE - 10	10	10	10	9		9	10	8	10	8	10	7	5	10	6	7	10		10	10	10	10	10	10	9		10	10	10	DRAINAGE - 10
SAFETY - 20	6	5	0	1		1	0	1	20	1	0	2	2	20	2	0	0		7	20	7	7	20	0	0		8	20	7	SAFETY - 20
ADT 1968	781	976	900	999		1670	1586	1052	1015	1015	961	961	1007	1043	1176	2438	2438		1483	938	935	1302	1302	2427	2427		1944	871	841	ADT 1968
DESIGN HOUR VOLUME	160	200	180	200		340	320	170	160	160	150	150	150	160	180	230	230		220	140	140	190	190	340	340		200	110	110	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	319	400	354	643		423	588	324	561	435	530	462	486	561	486	291	1013		238	264	574	544	3450	3489	3489		508	535	554	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	22	22	22	25		18	22	22	26	24	26	25	25	26	24	15	26		16	22	26	25	29	29	29		24	27	27	CAPACITY RATING - 30
SUFFICIENCY RATING	56	67	66	57		37	64	43	79	47	61	46	43	82	44	36	60		73	92	83	65	91	71	62		69	83	74	SUFFICIENCY RATING
ADJUSTED RATING	56	65	65	55		31	59	40	77	45	59	44	41	80	41	28	51		69	91	82	61	89	64	94		64	82	73	ADJUSTED RATING

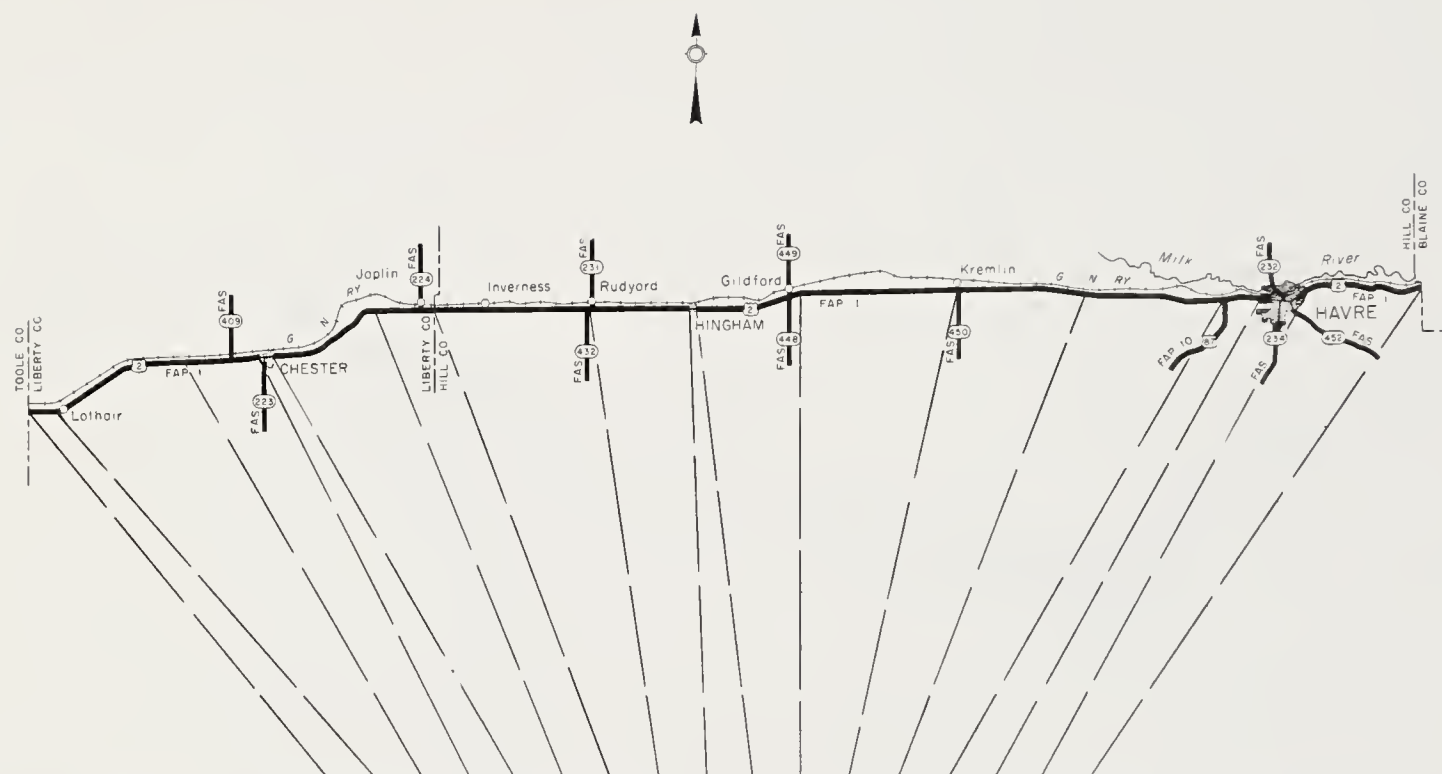


BEGINNING MILE POST	307.0	308.0	315.3		322.6	329.6	332.6	341.9		348.2	354.6	363.5	372.1	379.1		383.5	BEGINNING MILE POST
LENGTH	1.0	7.3	6.5		7.0	3.0	9.3	5.8		6.4	9.0	8.6	7.0	2.2		7.5	LENGTH
YEAR BUILT	57	47	30		31	32	31	60		60	36	36	60	52		46	YEAR BUILT
YEAR IMPROVED	62	47	47		35	35	35	60		60	36	36	60	52		46	YEAR IMPROVED
SURFACE WIDTH	32	24	24		20	20	20	32		32	26	26	32	40		24	SURFACE WIDTH
ROADWAY WIDTH	32	28	28		24	24	24	32		32	32	32	32	40		32	ROADWAY WIDTH
FOUNDATION - 10	9	7	8	N	0	0	0	10	N	10	6	5	8	4	N	8	FOUNDATION - 10
SURFACE - 30	22	18	18	A	7	7	7	23	A	22	18	16	21	14	A	20	SURFACE - 30
DRAINAGE - 10	10	10	10	B	5	3	5	10	B	10	10	10	10	10	B	10	DRAINAGE - 10
SAFETY - 20	20	1	1	R	0	1	1	12	R	13	1	2	7	2	R	3	SAFETY - 20
ADT 1968	826	834	936	U	921	902	1050	1096	U	990	1089	1452	1648	3579	U	6737	ADT 1968
DESIGN HOUR VOLUME	110	110	120		120	120	140	140		130	140	190	210	390		740	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	594	503	570		422	627	471	594		594	530	632	574	370		662	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	27	27		26	27	26	26		27	26	25	25	14		13	CAPACITY RATING - 30
SUFFICIENCY RATING	88	63	64		38	38	39	81		82	61	58	71	44		54	SUFFICIENCY RATING
ADJUSTED RATING	87	62	62		36	37	37	79		81	58	53	66	32		38	ADJUSTED RATING



BEGINNING MILE POST	391.0	393.8		404.1	413.4	421.3	423.9		424.7	430.0	435.2	439.9	446.2		454.6	457.7	466.7		472.4	481.4	488.0		493.9	BEGINNING MILE POST
LENGTH	2.8	9.7		9.3	7.9	2.6	0.8		4.4	5.2	4.7	6.4	7.4		3.1	9.0	4.9		9.0	7.7	10.0		1.5	LENGTH
YEAR BUILT	46	38		40	56	39	68		68	36	25	25	25		49	63	53		67	67	67		55	YEAR BUILT
YEAR IMPROVED	52	38		40	56	39	68		68	36	36	35	35		49	63	53		67	67	67		55	YEAR IMPROVED
SURFACE WIDTH	24	24		30	32	24	40		40	24	20	22	22		24	32	24		40	40	40		24	SURFACE WIDTH
ROADWAY WIDTH	32	30		30	32	32	40		40	30	24	24	24		26	32	30		40	40	40		28	ROADWAY WIDTH
FOUNDATION - 10	8	6	N	7	5	7	10		10	6	0	0	0		4	9	4		10	10	10		5	FOUNDATION - 10
SURFACE - 30	18	18	N	18	15	18	30		30	17	12	11	11		15	25	17		30	30	30		18	SURFACE - 30
DRAINAGE - 10	10	10		10	10	10	10		10	10	4	6	6		8	10	10		10	10	10		10	DRAINAGE - 10
SAFETY - 20	6	19		9	8	5	20		20	1	1	4	2		6	6	5		18	20	20		20	SAFETY - 20
ADT 1968	1730	1840	U	1890	1526	1530	1101		1232	929	863	850	1150		1199	1186	1878		1221	819	1162		1002	ADT 1968
DESIGN HOUR VOLUME	220	240		250	200	200	130		140	120	110	110	150		160	150	240		160	110	160		130	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	680	663		561	561	680	264		264	491	325	486	420		539	554	601		220	232	220		586	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	25	25		23	25	26	23		22	26	25	27	25		26	26	24		19	23	19		27	CAPACITY RATING - 30
SUFFICIENCY RATING	67	78		67	63	66	93		92	60	42	48	44		59	76	60		87	93	88		80	SUFFICIENCY RATING
ADJUSTED RATING	61	73		61	58	61	92		91	58	41	47	41		56	73	53		85	92	87		78	ADJUSTED RATING




BEGINNING MILE POST	501.4	508.0	515.6	521.4	526.5	529.2	537.5		542.4	543.8	546.2	554.6		556.0	564.8	573.0	BEGINNING MILE POST
LENGTH	6.6	7.6	5.8	5.1	2.7	8.4	3.0		1.4	2.4	8.4	0.5		8.8	8.2	8.1	LENGTH
YEAR BUILT	55	66	51	51	48	50	48		62	62	53	56		56	61	58	YEAR BUILT
YEAR IMPROVED	55	66	55	55	55	55	48		62	62	53	61		61	61	61	YEAR IMPROVED
SURFACE WIDTH	24	40	24	24	24	24	24		68	36	24	32		32	32	32	SURFACE WIDTH
ROADWAY WIDTH	28	40	28	26	26	26	28		68	36	30	32		32	32	32	ROADWAY WIDTH
FOUNDATION - 10	4	9	4	5	6	5	4	N	9	9	3	8		6	7	6	FOUNDATION - 10
SURFACE - 30	17	28	17	18	18	17	13	A	23	23	14	18		19	21	20	SURFACE - 30
DRAINAGE - 10	9	10	10	10	10	10	10	B	10	10	10	10		10	10	10	DRAINAGE - 10
SAFETY - 20	7	8	3	1	1	1	3	R	3	1	3	20		9	8	16	SAFETY - 20
ADT 1968	1053	1087	926	929	947	1182	2411	U	3858	1357	1302	1321		1265	1125	1160	ADT 1968
DESIGN HOUR VOLUME	140	150	120	120	130	160	320		520	180	180	180		170	150	170	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	500	244	559	471	260	442	842		3400	238	632	561		574	594	561	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	26	21	27	26	22	25	24		28	19	26	25		26	26	25	CAPACITY RATING - 30
SUFFICIENCY RATING	63	76	61	60	57	58	55		73	62	56	81		70	72	77	SUFFICIENCY RATING
ADJUSTED RATING	61	74	59	58	55	55	46		63	58	52	78		67	69	75	ADJUSTED RATING

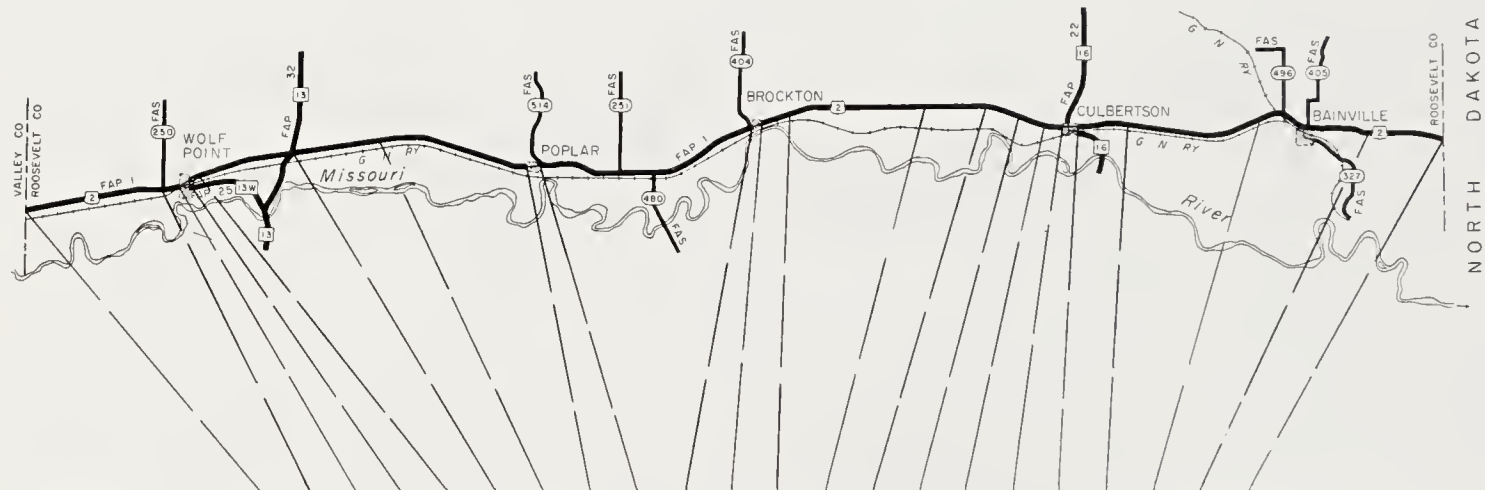


BEGINNING MILE POST	581.1	589.3		591.0	591.5	587.2	601.8		611.9		626.1	627.6	634.7	638.0	639.8	642.5		645.0	648.0	656.3	661.5	BEGINNING MILE POST
LENGTH	8.3	1.1		0.5	5.8	4.6	9.8		13.7		1.5	7.1	3.3	1.7	2.7	1.7		3.0	8.3	5.2	5.6	LENGTH
YEAR BUILT	57	57		58	58	58	60				34	46	52	52	52	56		56	61	55	55	YEAR BUILT
YEAR IMPROVED	61	61		58	58	58	60				43	49	52	52	52	61		61	61	62	62	YEAR IMPROVED
SURFACE WIDTH	32	32		44	32	32	32				24	24	24	24	24	32		32	32	32	32	SURFACE WIDTH
ROADWAY WIDTH	32	32		44	32	32	32				30	30	30	30	30	32		32	32	32	32	ROADWAY WIDTH
FOUNDATION - 10	8	9		8	8	8	9				3	5	5	5	0	5		9	9	10	10	FOUNDATION - 10
SURFACE - 30	20	20	A	22	19	19	25	A	UNDER	A	14	16	17	17	15	17	A	20	24	26	26	SURFACE - 30
DRAINAGE - 10	10	10	B	10	10	10	10	B	UNDER	B	10	9	10	10	10	10	B	10	10	10	10	DRAINAGE - 10
SAFETY - 20	8	1	R	0	6	9	10	R	UNDER	R	1	1	3	1	2	2	R	3	8	5	6	SAFETY - 20
ADT 1968	1392	1512	U	1749	1617	1236	1169	U	UNDER	U	900	867	688	700	753	787	U	1047	869	800	695	ADT 1968
DESIGN HOUR VOLUME	200	230		210	190	150	140				120	110	90	90	100	100		140	120	110	100	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	508	535		1816	535	535	594				663	293	415	518	415	394		561	549	488	374	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	24	24		28	25	26	26				27	24	27	27	26	26		26	27	27	26	CAPACITY RATING - 30
SUFFICIENCY RATING	70	64		68	68	72	80				55	55	62	60	53	60		68	78	78	78	SUFFICIENCY RATING
ADJUSTED RATING	66	59		62	63	69	78				54	54	63	60	53	60		66	77	77	78	ADJUSTED RATING





BEGINNING MILE POST	96.8	96.9	102.0		106.6	107.9	108.0	108.3	111.8	111.9	112.6	BEGINNING MILE POST
LENGTH	0.1	5.2	0.5		1.3	0.1	0.2	3.5	0.1	0.8	3.3	LENGTH
YEAR BUILT	66	52	68		31	66	66	31	66	50	28	YEAR BUILT
YEAR IMPROVED	66	52	68		31	66	66	31	66	50	30	YEAR IMPROVED
SURFACE WIDTH	36	24	72		24	32	32	24	32	32	24	SURFACE WIDTH
ROADWAY WIDTH	36	40	72		32	32	32	32	32	40	26	ROADWAY WIDTH
FOUNDATION - 10	10	4	10		0	10	10	0	10	8	0	FOUNDATION - 10
SURFACE - 30	30	15	30		12	30	30	12	30	17	11	SURFACE - 30
DRAINAGE - 10	10	10	10		5	10	10	5	10	8	7	DRAINAGE - 10
SAFETY - 20	0	3	20		1	0	0	1	20	0	1	SAFETY - 20
ADT 196B	2888	3736	5101		3107	3107	1490	1490	1490	3430	1232	ADT 196B
DESIGN HOUR VOLUME	370	490	660		350	350	160	160	160	450	170	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	256	469	2040		655	382	414	538	382	392	284	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	8	14	25		22	16	24	26	24	13	21	CAPACITY RATING - 30
SUFFICIENCY RATING	58	46	95		40	66	74	44	94	46	40	SUFFICIENCY RATING
ADJUSTED RATING	48	34	92		30	56	70	39	92	35	36	ADJUSTED RATING

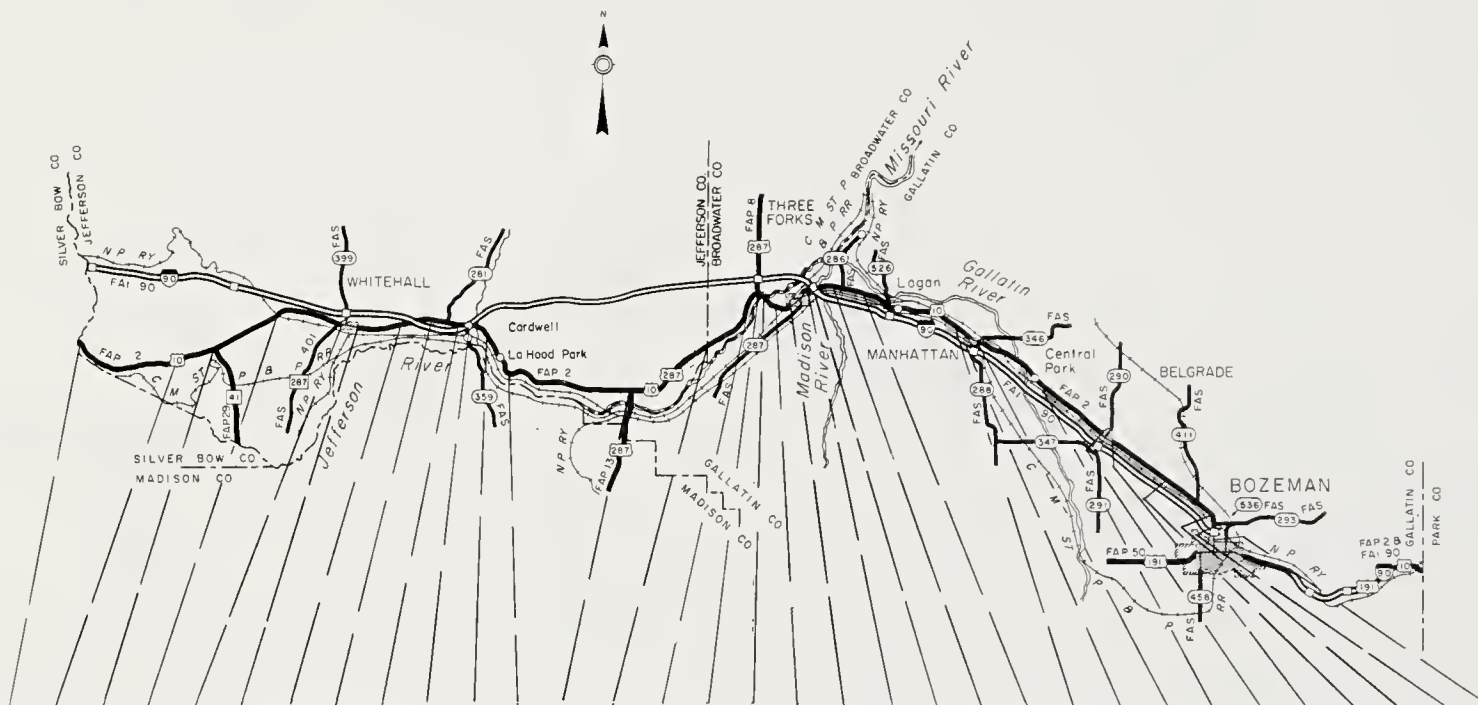

BEGINNING MILE POST	238.9	245.1	248.1	251.8		257.5	259.7	261.8	263.6	264.1	264.9	268.7	276.4	281.7	286.0	286.3	286.5	287.6		289.5	290.9	291.9	294.9	299.6		302.2	307.7		311.6	315.9	319.6	319.8	BEGINNING MILE POST
LENGTH	6.2	3.0	3.7	4.8		2.3	2.1	1.9	0.4	1.0	3.7	7.8	5.3	4.2	0.3	0.3	1.1	1.1		0.6	1.0	2.9	4.7	1.7		5.5	3.0		4.3	3.7	0.2	0.3	LENGTH
YEAR BUILT	31	51	41	42		55		55			29	29	32	32			50	32		50	65	30	31	31		34	23		22	37	66	66	YEAR BUILT
YEAR IMPROVED	32	51	41	42		55		55			32	32	32	32			50	38		50	65	31	31	31		34	30		30	37	66	66	YEAR IMPROVED
SURFACE WIDTH	24	24	24	24		32		32			22	22	22	24			34	24		32	32	22	22	22		24	24		24	24	68	68	SURFACE WIDTH
ROADWAY WIDTH	30	32	32	32		32		32			24	26	26	26			34	28		32	32	24	24	24		28	26		26	30	68	68	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	3		3		0			0	0	0	0			4	3		5	8	0	0	0		0	0		0	0	10	10	FOUNDATION - 10
SURFACE - 30	12	14	14	15		13		11			12	14	12	13			15	14		17	23	10	12	12		13	12		13	12	30	30	SURFACE - 30
DRAINAGE - 10	7	10	10	10		10		8			5	7	8	7			10	8		8	10	8	8	8		8	8		8	10	10	10	DRAINAGE - 10
SAFETY - 20	4	2	1	1		2		20			1	1	2	1			20	2		20	20	1	1	20		2	6		1	1	0	0	SAFETY - 20
ADT 1968	340	330	209	276		350		264			300	300	330	330			780	780		340	470	470	277	323		365	803		1413	1707	2351	3670	ADT 1968
DESIGN HOUR VOLUME	40	40	30	40		50		30			40	40	50	50			110	110		50	60	60	40	40		50	100		180	220	310	480	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	235	182	580	306		561		508			390	240	290	165			561	400		277	557	749	440	544		520	646		551	539	1820	1820	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	27	29	28		29		29			28	27	27	25			27	26		27	28	29	29	29		29	28		25	24	27	26	CAPACITY RATING - 30
SUFFICIENCY RATING	50	53	94	57		57		68			46	49	49	46			76	53		77	89	48	50	69		52	94		47	47	77	76	SUFFICIENCY RATING
ADJUSTED RATING	56	59	63	64		63		75			53	56	55	52			76	53		81	90	51	57	74		57	53		42	41	71	67	ADJUSTED RATING

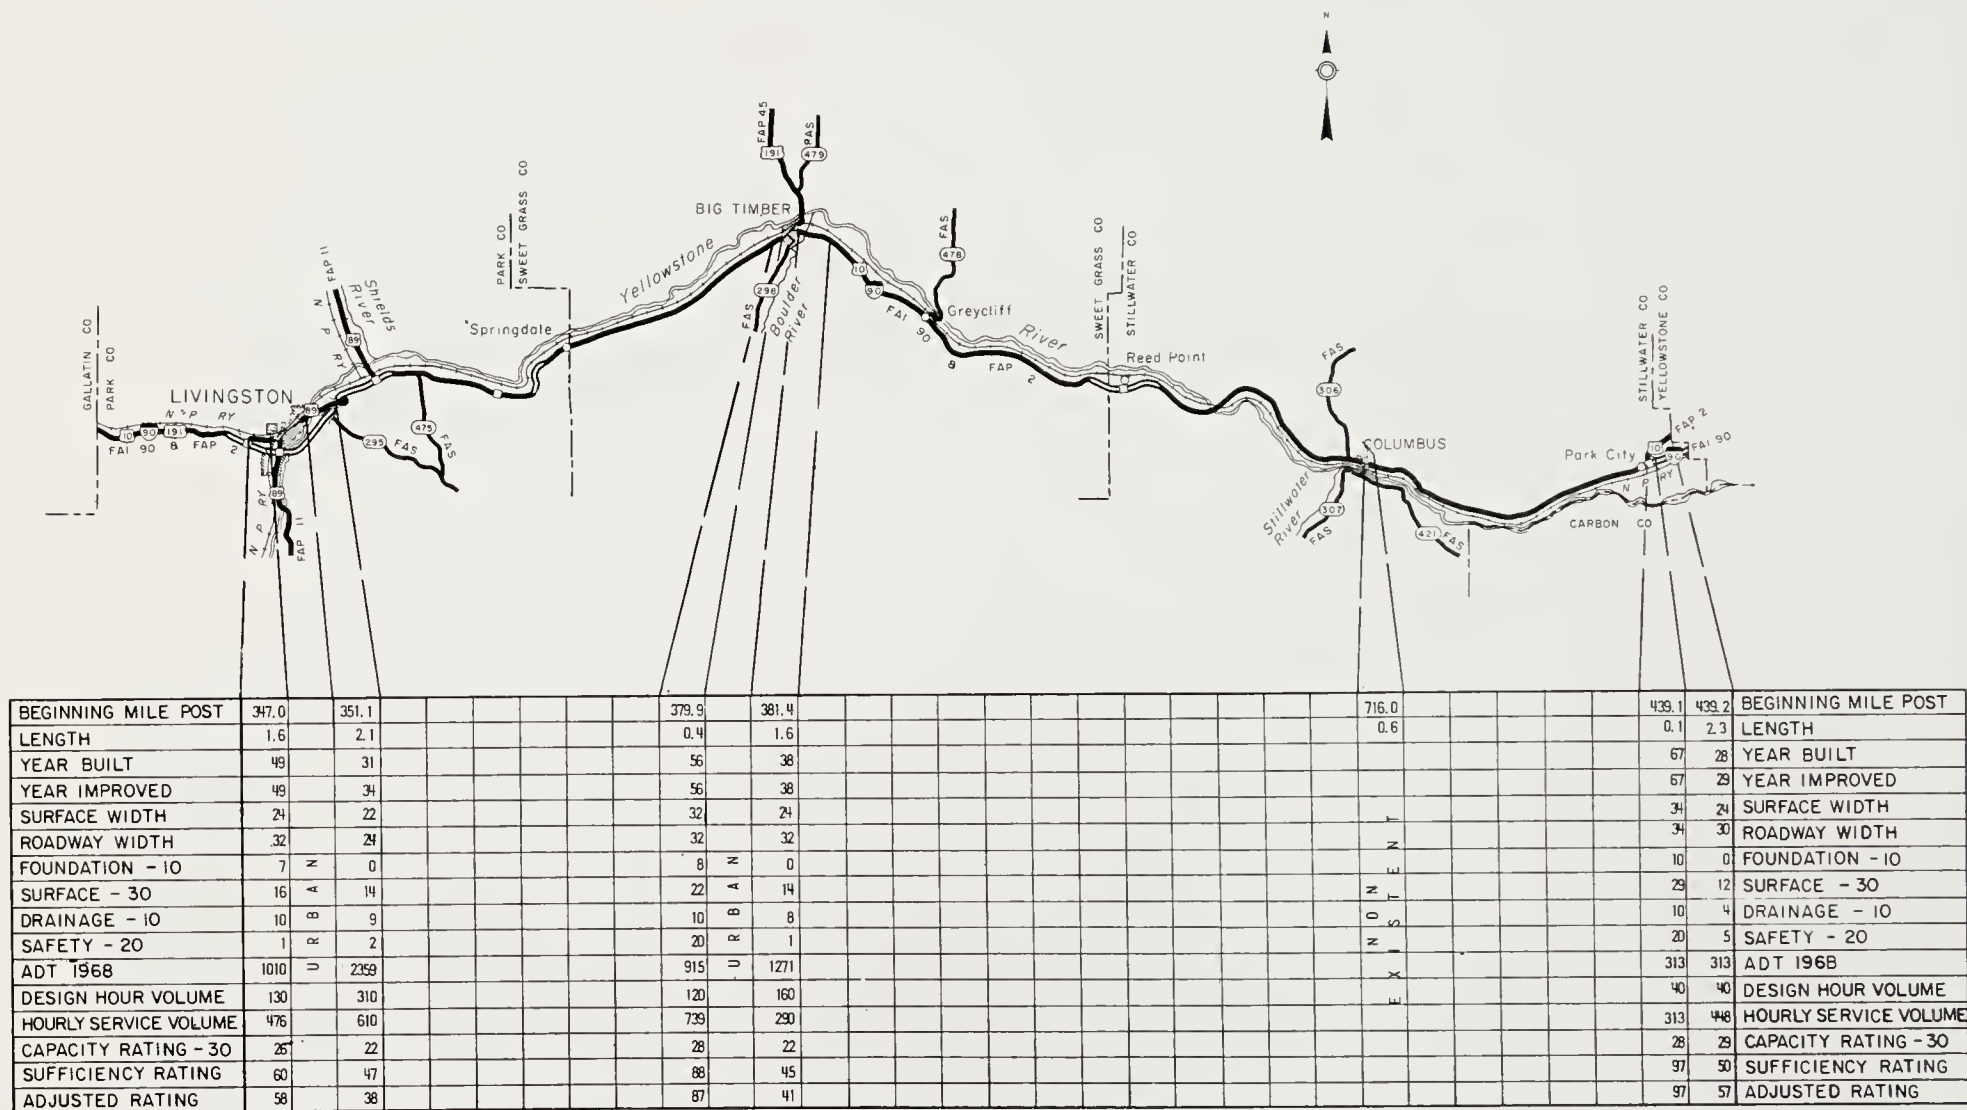

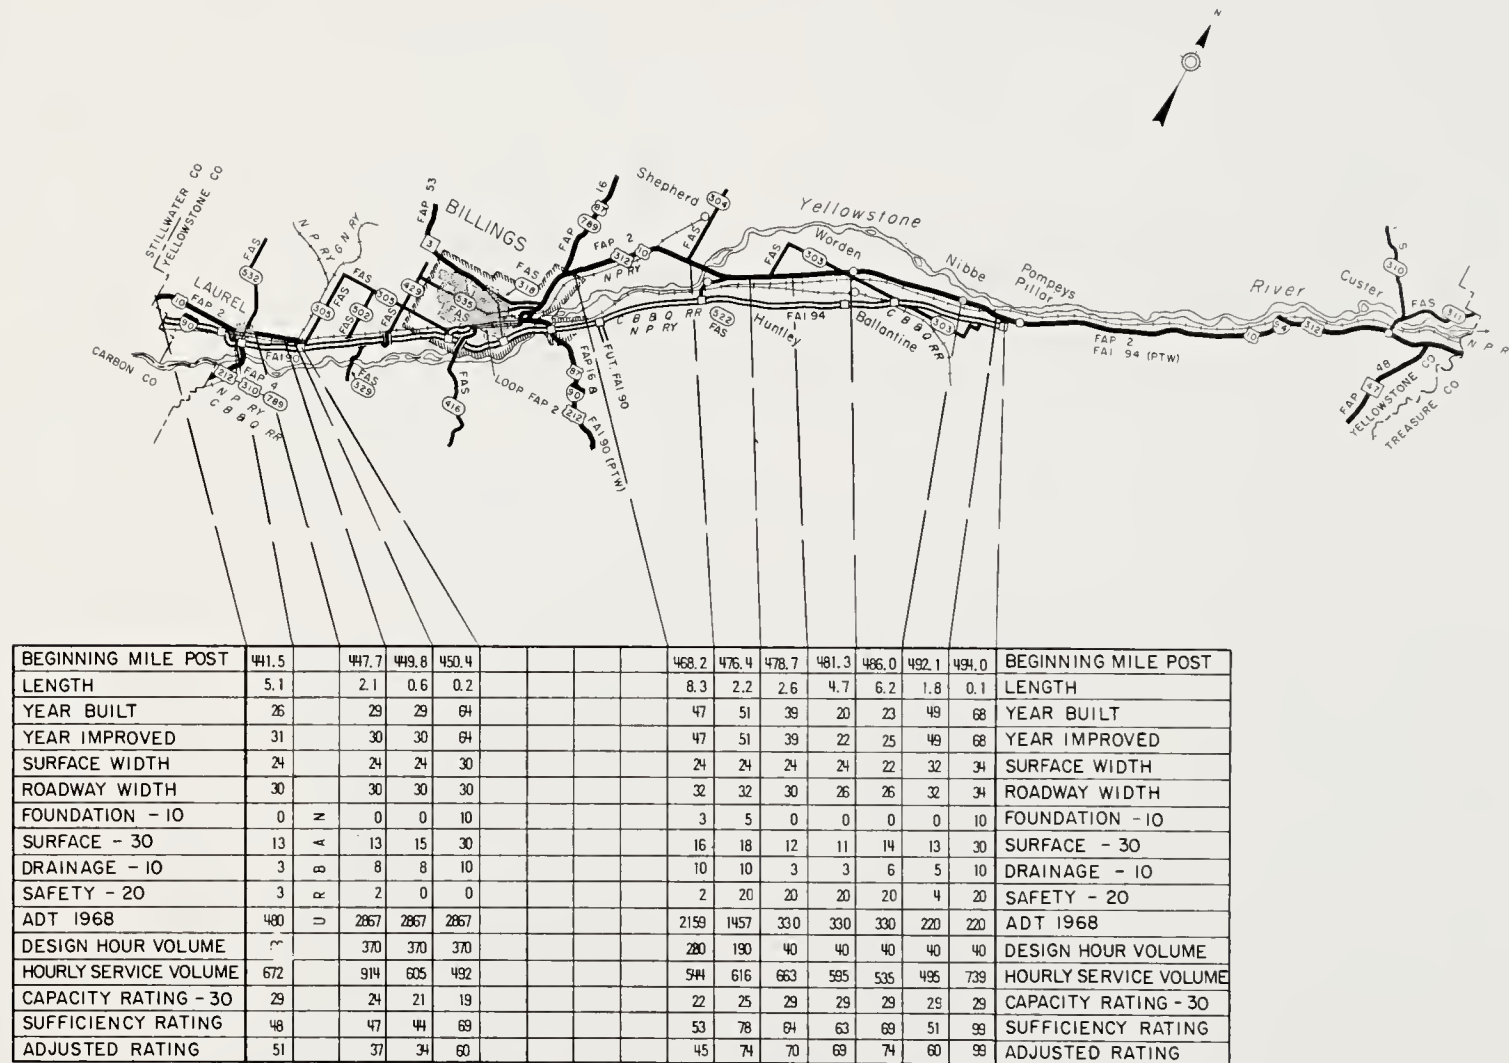

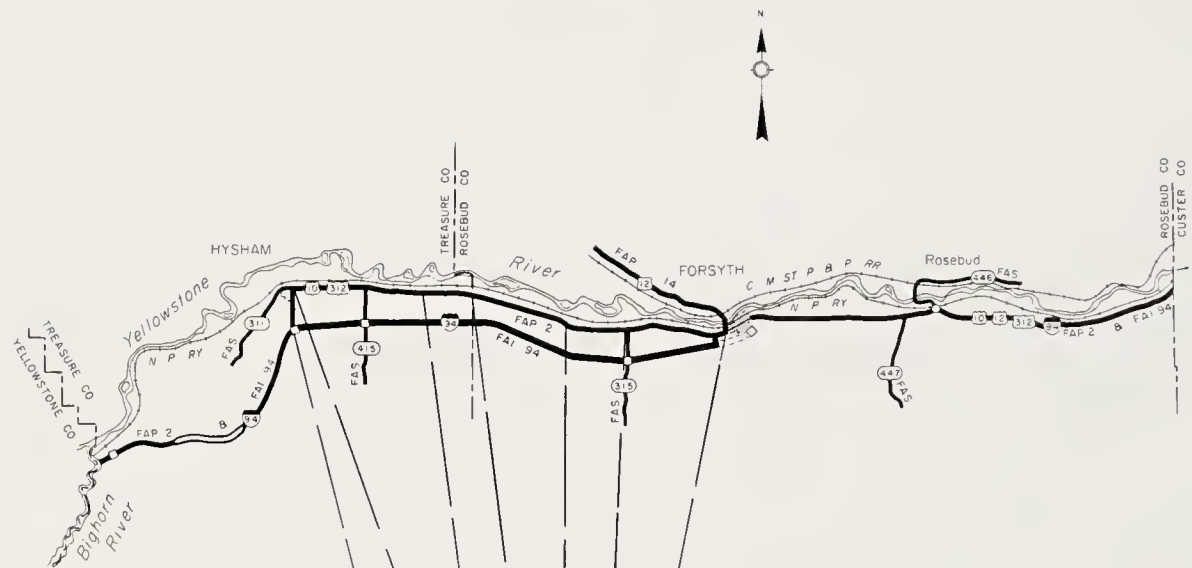

BEGINNING MILE POST	538.3	540.8	548.8	551.3	556.8	560.8	BEGINNING MILE POST
LENGTH	2.5	8.0	2.5	5.5	4.0	6.1	LENGTH
YEAR BUILT	64	33	33	36	41	41	YEAR BUILT
YEAR IMPROVED	64	33	33	36	41	50	YEAR IMPROVED
SURFACE WIDTH	30	22	22	26	24	24	SURFACE WIDTH
ROADWAY WIDTH	30	26	26	30	32	32	ROADWAY WIDTH
FOUNDATION - 10	9	0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	28	12	11	12	13	13	SURFACE - 30
DRAINAGE - 10	10	7	6	7	8	7	DRAINAGE - 10
SAFETY - 20	0	2	1	2	3	1	SAFETY - 20
ADT 196B	549	262	178	200	263	180	ADT 196B
DESIGN HOUR VOLUME	70	30	20	30	30	20	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	528	531	297	648	731	483	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	29	29	29	29	29	CAPACITY RATING - 30
SUFFICIENCY RATING	75	50	47	50	53	50	SUFFICIENCY RATING
ADJUSTED RATING	77	58	58	60	61	61	ADJUSTED RATING




BEGINNING MILE POST	608.9		614.8	616.1	616.8	623.2	631.2	641.5	644.1	655.8	661.7	667.7		680.9		693.9	699.0	BEGINNING MILE POST
LENGTH	0.9		1.3	0.7	6.3	8.1	10.2	2.6	11.8	5.9	6.1	12.4		11.7		5.1	6.4	LENGTH
YEAR BUILT	61		49	62	49	34	33	34	66	67	67	58		38		68	68	YEAR BUILT
YEAR IMPROVED	61		49	62	49	36	36	36	66	67	67	58		39		68	68	YEAR IMPROVED
SURFACE WIDTH	32		22	32	22	22	20	20	40	40	40	26		24		40	40	SURFACE WIDTH
ROADWAY WIDTH	32		26	32	24	24	24	24	40	40	40	32		30		40	40	ROADWAY WIDTH
FOUNDATION - 10	8		0	10	0	0	0	0	10	10	10	6		0		10	10	FOUNDATION - 10
SURFACE - 30	21		13	26	12	11	10	10	29	30	30	17		16		30	30	SURFACE - 30
DRAINAGE - 10	10		10	10	9	8	8	8	10	10	10	10		10		10	10	DRAINAGE - 10
SAFETY - 20	0		1	20	1	1	1	1	12	20	6	8		3		10	20	SAFETY - 20
ADT 1968	1113		1547	621	621	490	457	420	420	414	483	548		1321		1450	650	ADT 1968
DESIGN HOUR VOLUME	120		170	80	80	60	60	50	50	50	60	70		170		190	80	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	403		625	248	252	223	365	445	220	152	166	583		346		232	244	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	26		26	25	25	26	28	28	27	25	25	28		22		18	25	CAPACITY RATING - 30
SUFFICIENCY RATING	65		50	91	47	46	47	47	88	95	81	69		52		78	95	SUFFICIENCY RATING
ADJUSTED RATING	62		45	91	48	49	51	51	90	95	83	71		48		74	95	ADJUSTED RATING


IDAHO



BEGINNING MILE POST	60.2	
LENGTH	2.9	
YEAR BUILT	30	
YEAR IMPROVED	31	
SURFACE WIDTH	22	
ROADWAY WIDTH	28	
FOUNDATION - 10	0	N
SURFACE - 30	8	A
DRAINAGE - 10	6	B
SAFETY - 20	6	R
ADT 1968	1200	U
DESIGN HOUR VOLUME	160	
HOURLY SERVICE VOLUME	365	
CAPACITY RATING - 30	23	
SUFFICIENCY RATING	43	
ADJUSTED RATING	40	

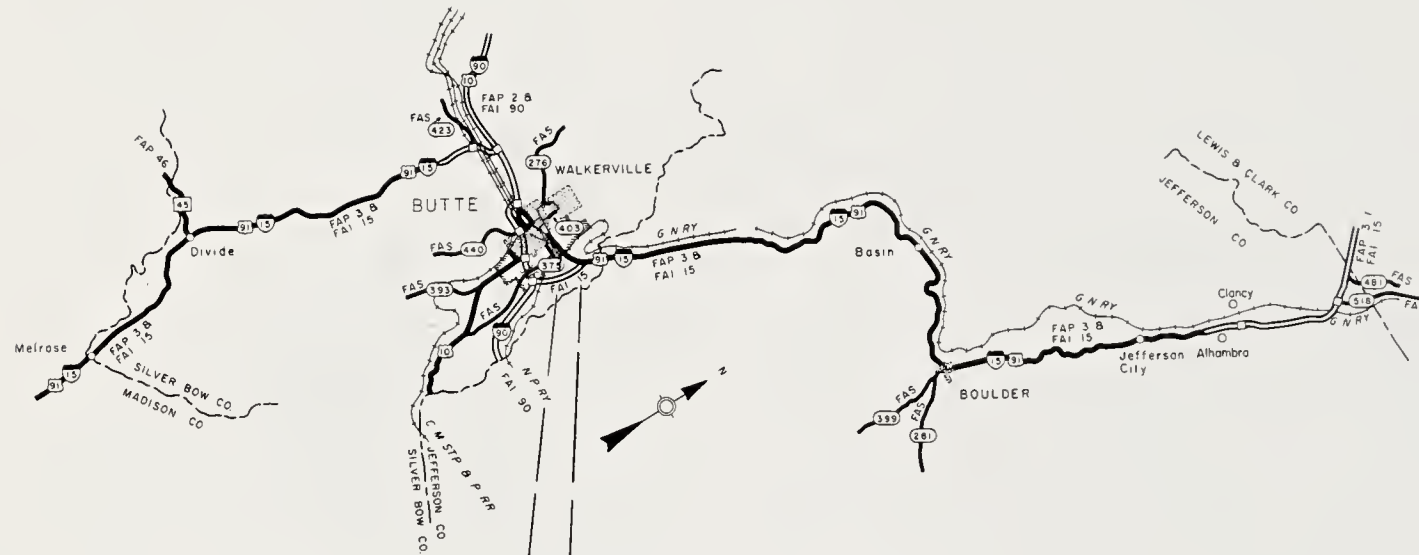

BEGINNING MILE POST	131.9
LENGTH	2.2
YEAR BUILT	49
YEAR IMPROVED	50
SURFACE WIDTH	24
ROADWAY WIDTH	36
FOUNDATION - 10	5
SURFACE - 30	18
DRAINAGE - 10	8
SAFETY - 20	1
ADT 1968	662
DESIGN HOUR VOLUME	70
HOURLY SERVICE VOLUME	414
CAPACITY RATING - 30	27
SUFFICIENCY RATING	59
ADJUSTED RATING	60

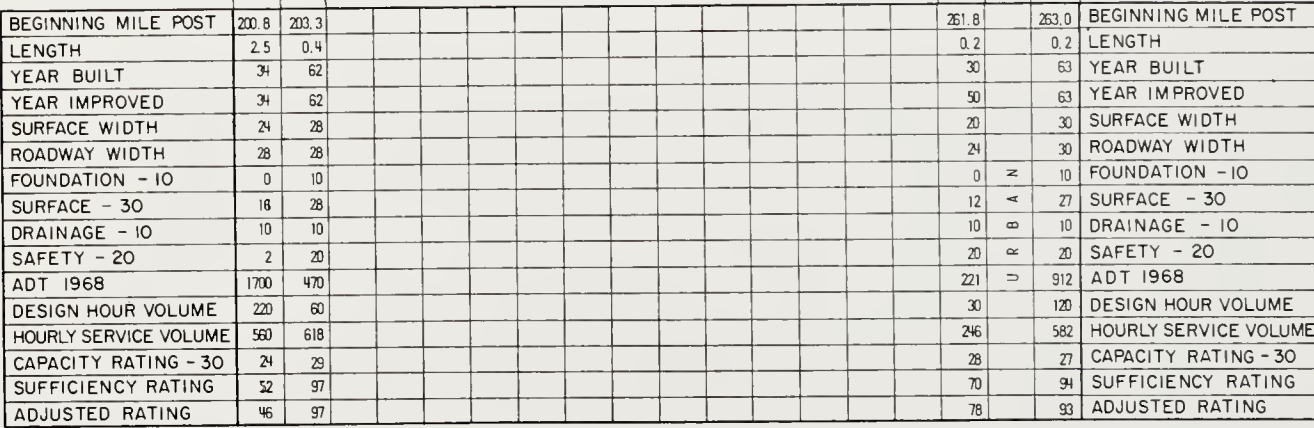





BEGINNING MILE POST	291.4	291.7	291.9	292.0	298.3	299.5	300.9	307.0	314.3	315.8	317.0	319.2		323.0	324.5	327.2		340.9	346.3	353.9	358.6	367.2	374.1	382.6	BEGINNING MILE POST
LENGTH	0.3	0.2	0.1	7.3	0.3	1.4	6.2	7.3	1.5	1.2	2.1	3.0		1.5	2.7	12.3		5.4	7.5	4.6	8.6	6.9	8.4	5.6	LENGTH
YEAR BUILT	40	67	67	21	61	55	36	40	42	62	21	21		21	21	41		21	21	30	30	30	28	66	YEAR BUILT
YEAR IMPROVED	40	67	67	40	61	55	36	40	42	62	32	32		32	32	41		32	32	32	32	32	32	66	YEAR IMPROVED
SURFACE WIDTH	24	30	30	24	24	24	24	24	24	34	20	20		22	20	24		22	22	20	22	22	22	34	SURFACE WIDTH
ROADWAY WIDTH	30	30	30	30	30	32	32	30	30	34	24	24		24	24	30		26	24	24	24	24	24	34	ROADWAY WIDTH
FOUNDATION - 10	6	10	10	0	10	7	0	0	7	8	0	0		0	0	4		0	0	0	0	0	0	10	FOUNDATION - 10
SURFACE - 30	18	30	30	9	20	17	12	12	16	23	10	11		11	10	14		11	10	10	11	9	9	30	SURFACE - 30
DRAINAGE - 10	8	10	10	8	10	10	8	8	8	10	4	4		3	3	7		5	5	6	6	4	4	10	DRAINAGE - 10
SAFETY - 20	0	20	20	2	20	1	4	5	1	20	1	1		1	1	5		2	3	1	1	1	1	4	SAFETY - 20
ADT 1968	2537	2537	347	347	347	2636	2632	1093	771	778	860	1502		733	720	850		1219	588	540	520	524	428	432	ADT 1968
DESIGN HOUR VOLUME	330	330	50	50	50	340	340	140	100	100	110	190		100	100	120		290	140	130	120	130	100	100	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	452	462	528	952	780	397	648	470	601	594	711	420		470	711	601		894	755	702	387	472	717	568	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	19	19	29	29	29	17	22	26	28	27	28	23		27	28	27		25	27	27	25	26	28	27	CAPACITY RATING - 30
SUFFICIENCY RATING	51	89	99	48	89	52	46	51	60	88	43	39		42	42	57		43	45	44	43	40	42	81	SUFFICIENCY RATING
ADJUSTED RATING	42	85	99	54	91	43	37	48	60	88	42	34		42	42	56		39	47	46	46	43	46	83	ADJUSTED RATING




BEGINNING MILE POST	388.2	394.1	400.0	402.3		411.7		412.9	416.4	422.7	425.0	430.4	438.5	444.5	448.8	452.8	456.6	457.5	BEGINNING MILE POST
LENGTH	5.9	5.9	2.1	7.1		0.9		3.5	6.4	2.2	5.3	8.2	6.0	4.3	4.0	3.8	0.9	5.8	LENGTH
YEAR BUILT	68	67	51	60		25		24	25	29	28	28	58	64	56	52	61	52	YEAR BUILT
YEAR IMPROVED	68	67	51	60		34		35	35	34	36	36	64	64	64	52	61	52	YEAR IMPROVED
SURFACE WIDTH	34	34	24	32		22		20	20	20	20	18	44	32	32	24	28	22	SURFACE WIDTH
ROADWAY WIDTH	34	34	28	32		24		24	24	24	24	24	44	32	32	28	28	28	ROADWAY WIDTH
FOUNDATION - 10	10	10	7	7		0		0	0	0	0	0	10	10	10	3	9	4	FOUNDATION - 10
SURFACE - 30	30	30	22	24		10		11	11	11	12	7	28	30	28	15	21	16	SURFACE - 30
DRAINAGE - 10	10	10	10	10		9		8	8	8	4	4	10	10	10	9	10	10	DRAINAGE - 10
SAFETY - 20	20	2	1	5		0		1	1	1	1	2	6	2	4	1	20	4	SAFETY - 20
ADT 1968	432	442	456	578		1870		771	693	588	575	610	645	628	650	555	490	323	ADT 1968
DESIGN HOUR VOLUME	100	100	110	110		380		150	140	120	120	120	130	130	130	110	100	70	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	596	464	594	487		423		508	209	599	302	281	332	490	517	462	490	500	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	27	27	26		17		26	20	27	24	24	24	26	26	26	27	28	CAPACITY RATING - 30
SUFFICIENCY RATING	97	79	67	72		36		46	40	47	41	37	78	78	78	94	87	62	SUFFICIENCY RATING
ADJUSTED RATING	97	81	70	73		30		46	41	49	43	38	79	79	79	56	88	68	ADJUSTED RATING

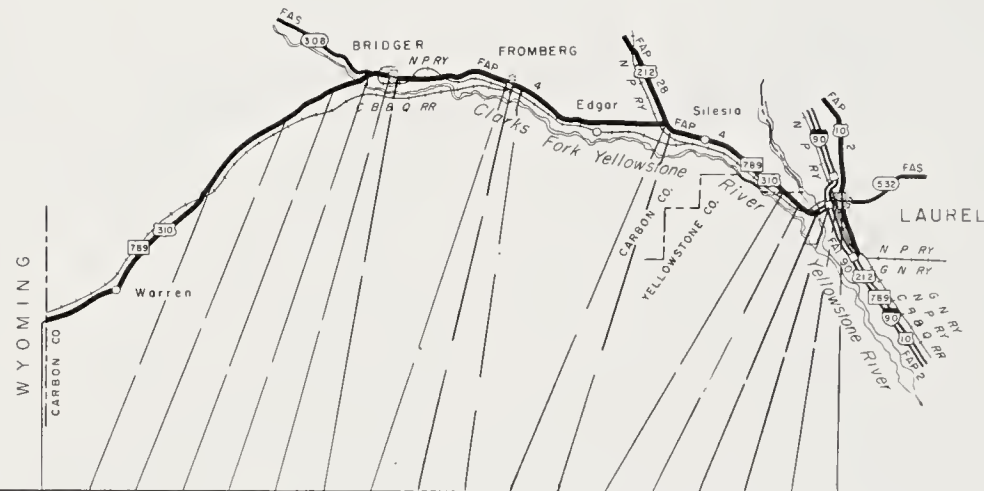


BEGINNING MILE POST	0.0	13.4	19.2	22.1	24.8		26.2		33.1	33.7	42.8	42.9	50.8	52.2	53.8	54.2		BEGINNING MILE POST
LENGTH	13.4	5.8	3.0	2.6	0.9		6.5		0.6	8.9	0.2	8.0	1.4	1.6	0.4	0.2		LENGTH
YEAR BUILT	56	59	30	30	33		23		54	68	68	49	49	39	64	64		YEAR BUILT
YEAR IMPROVED	63	59	33	33	33		33		54	68	68	49	49	39	64	64		YEAR IMPROVED
SURFACE WIDTH	32	32	22	22	22		22		24	40	40	24	24	24	68	68		SURFACE WIDTH
ROADWAY WIDTH	32	32	24	24	26		24		32	40	40	32	32	30	68	68		ROADWAY WIDTH
FOUNDATION - 10	7	5	0	0	0		0		7	10	10	5	5	4	10	10		FOUNDATION - 10
SURFACE - 30	23	19	12	13	13		14		18	30	30	15	16	16	26	30		SURFACE - 30
DRAINAGE - 10	10	10	8	10	10		6		10	10	10	10	9	7	10	10		DRAINAGE - 10
SAFETY - 20	9	12	1	1	0		3		20	20	20	16	3	1	0	0		SAFETY - 20
ADT 1968	611	758	798	1028	1806		1576		1420	1728	2813	2850	3278	3721	3721	6350		ADT 1968
DESIGN HOUR VOLUME	80	100	100	130	230		200		180	220	360	370	420	480	480	830		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	512	531	176	431	501		494		629	232	264	616	616	329	1408	1408		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	27	21	25	23		23		26	16	10	21	20	8	25	21		CAPACITY RATING - 30
SUFFICIENCY RATING	77	73	42	49	46		46		81	86	80	67	53	36	71	71		SUFFICIENCY RATING
ADJUSTED RATING	78	73	42	47	39		40		78	83	73	58	42	25	61	58		ADJUSTED RATING

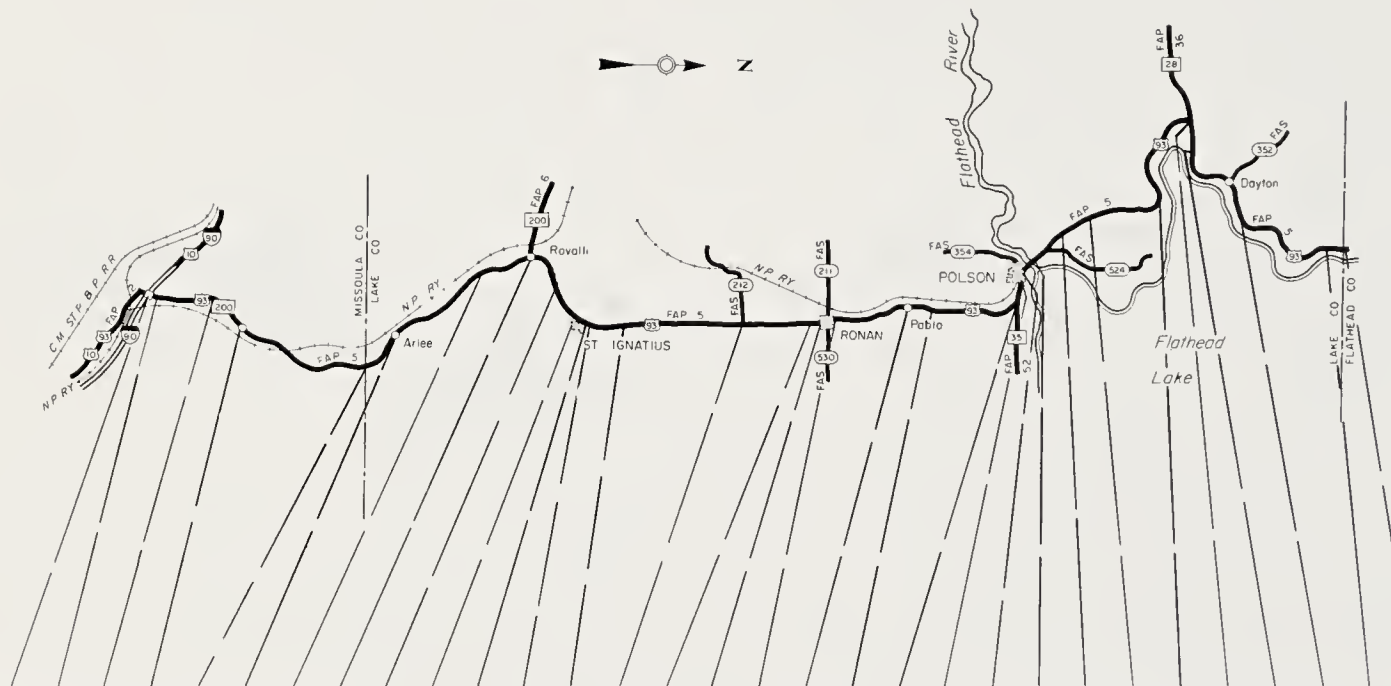


BEGINNING MILE POST	0.0	0.2	4.0	5.5	15.0	18.4	24.3	27.5	30.0		32.7	33.1	35.0	41.1	46.1		47.5	52.6	53.6	59.0		61.0	61.6	64.5	67.4	72.0	77.5	79.3	87.9	92.7	BEGINNING MILE POST
LENGTH	0.2	3.5	1.5	9.5	3.4	5.9	3.1	2.5	2.6		0.3	1.9	6.1	5.0	0.4		5.1	1.1	5.5	0.8		0.6	2.9	2.9	4.6	5.5	1.8	8.5	4.9	0.7	LENGTH
YEAR BUILT	66	33	48	64	24	55	54	56	56			56	50	66	33		33	24	58	58		66	54	54	54	58	62	30	31	64	YEAR BUILT
YEAR IMPROVED	66	33	48	64	40	60	60	60	60			60	50	66	33		33	34	58	58		66	54	54	54	62	62	32	33	64	YEAR IMPROVED
SURFACE WIDTH	36	22	24	36	24	32	32	44	32			32	24	40	22		22	20	32	40		40	24	24	24	32	32	20	22	32	SURFACE WIDTH
ROADWAY WIDTH	36	26	32	36	30	32	32	44	32			32	32	40	24		24	24	32	40		40	30	32	32	32	32	24	24	32	ROADWAY WIDTH
FOUNDATION - 10	10	0	4	8	5	9	10	8	8			8	4	10	0		0	0	10	10		10	7	8	7	9	10	0	0	10	FOUNDATION - 10
SURFACE - 30	30	11	14	20	17	21	22	20	19			18	12	28	8		8	9	20	22		30	16	17	17	23	23	9	11	28	SURFACE - 30
DRAINAGE - 10	10	7	7	10	8	10	10	10	10			10	8	10	5		5	5	10	10		10	10	10	9	10	10	5	4	10	DRAINAGE - 10
SAFETY - 20	0	1	1	9	2	12	3	2	1			4	1	5	0		1	1	5	0		0	3	6	5	5	4	1	1	0	SAFETY - 20
ADT 196B	2384	2384	2384	2375	2280	2280	2464	1968	1892			2146	2134	2520	2720		2691	2823	3779	4158		1935	1935	1329	1296	1248	1061	1052	1059		ADT 1968
DESIGN HOUR VOLUME	350	350	350	340	330	330	360	280	270			310	310	360	390		360	380	510	560		260	260	180	170	170	140	140	140	140	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	350	315	221	421	565	528	302	332	449			449	504	251	732		618	536	415	166		218	530	334	265	395	594	284	303	448	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	15	13	6	18	21	21	12	17	21			20	21	8	22		21	19	12	0		12	23	22	20	24	26	23	23	25	CAPACITY RATING - 30
SUFFICIENCY RATING	65	32	32	65	53	73	57	57	59			60	46	61	35		35	34	57	42		62	59	63	58	71	73	38	39	73	SUFFICIENCY RATING
ADJUSTED RATING	57	24	24	57	45	66	48	50	52			52	38	52	26		26	25	45	29		55	52	59	54	68	71	36	36	71	ADJUSTED RATING

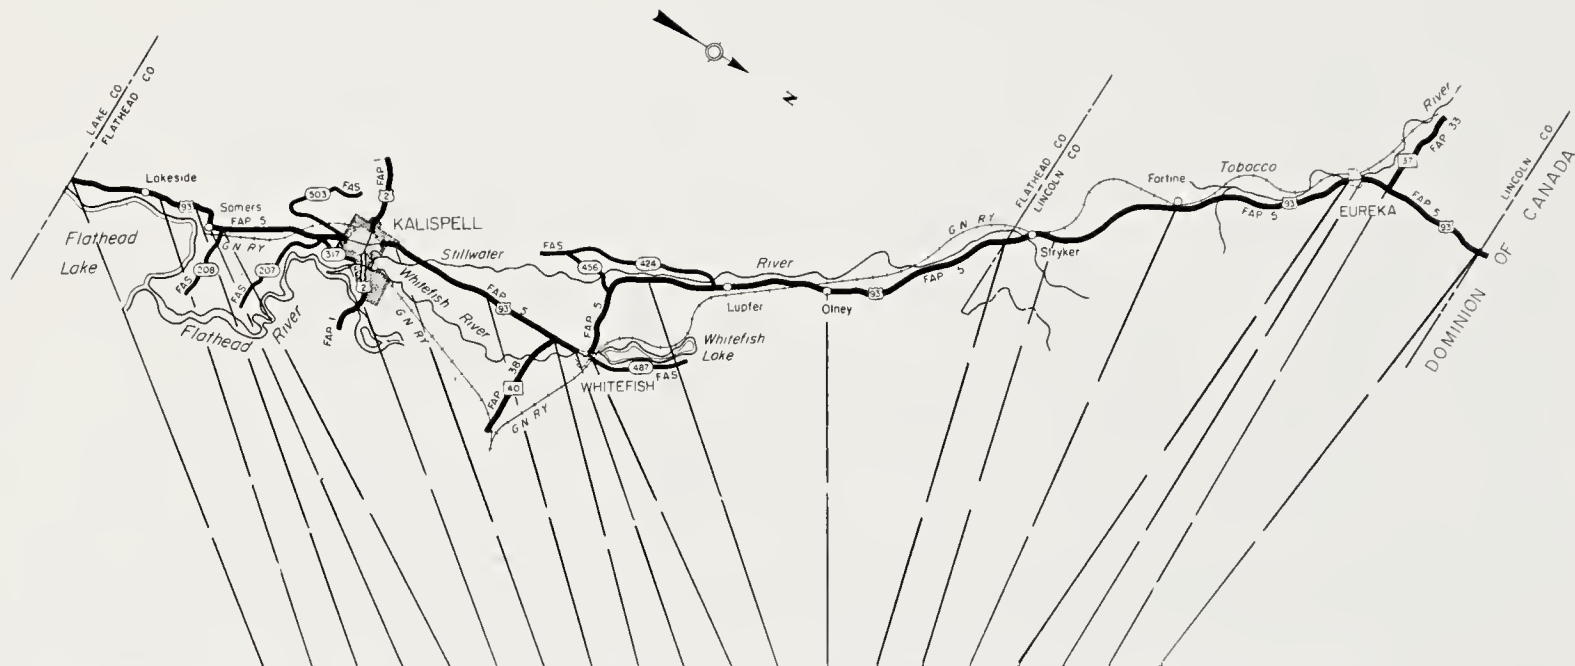


BEGINNING MILE POST	93.5	96.6	102.1	100.1	104.2		114.8	120.6	125.4		128.6	134.6	145.6	156.8	159.5	168.3		179.5	180.9	BEGINNING MILE POST
LENGTH	5.2	3.4	1.0	1.1	5.9		5.8	4.8	1.2		6.4	10.9	11.3	2.7	8.7	9.7		1.4	6.5	LENGTH
YEAR BUILT	64	63	63	63	49		57	60	60		34	55	55	55	31	33		44	50	YEAR BUILT
YEAR IMPROVED	64	63	63	63	61		60	60	60		36	59	60	60	36	36		44	50	YEAR IMPROVED
SURFACE WIDTH	32	32	42	32	40		36	36	36		22	28	26	26	22	22		22	22	SURFACE WIDTH
ROADWAY WIDTH	32	32	42	32	40		36	36	36		24	28	26	26	24	24		26	26	ROADWAY WIDTH
FOUNDATION - 10	9	10	10	10	9		9	9	10		0	8	9	8	0	0		0	0	FOUNDATION - 10
SURFACE - 30	27	26	27	28	24		22	21	23		11	18	20	20	12	12		12	12	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10		10	10	10		4	10	9	9	4	5		8	9	DRAINAGE - 10
SAFETY - 20	2	3	0	1	6		6	5	1		1	7	11	3	1	1		0	2	SAFETY - 20
ADT 1968	1078	1792	1946	2100	4550		1985	2498	3934		1391	814	591	578	638	1388		1049	399	ADT 1968
DESIGN HOUR VOLUME	140	240	260	280	550		260	320	470		180	100	80	80	80	180		140	50	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	460	281	907	281	313		256	256	574		141	508	302	302	141	169		290	342	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	25	17	26	15	4		15	11	18		11	27	26	26	21	14		23	28	CAPACITY RATING - 30
SUFFICIENCY RATING	73	66	73	64	53		62	56	62		27	70	75	66	38	32		43	51	SUFFICIENCY RATING
ADJUSTED RATING	71	60	67	57	40		55	47	50		23	69	76	68	39	28		41	56	ADJUSTED RATING

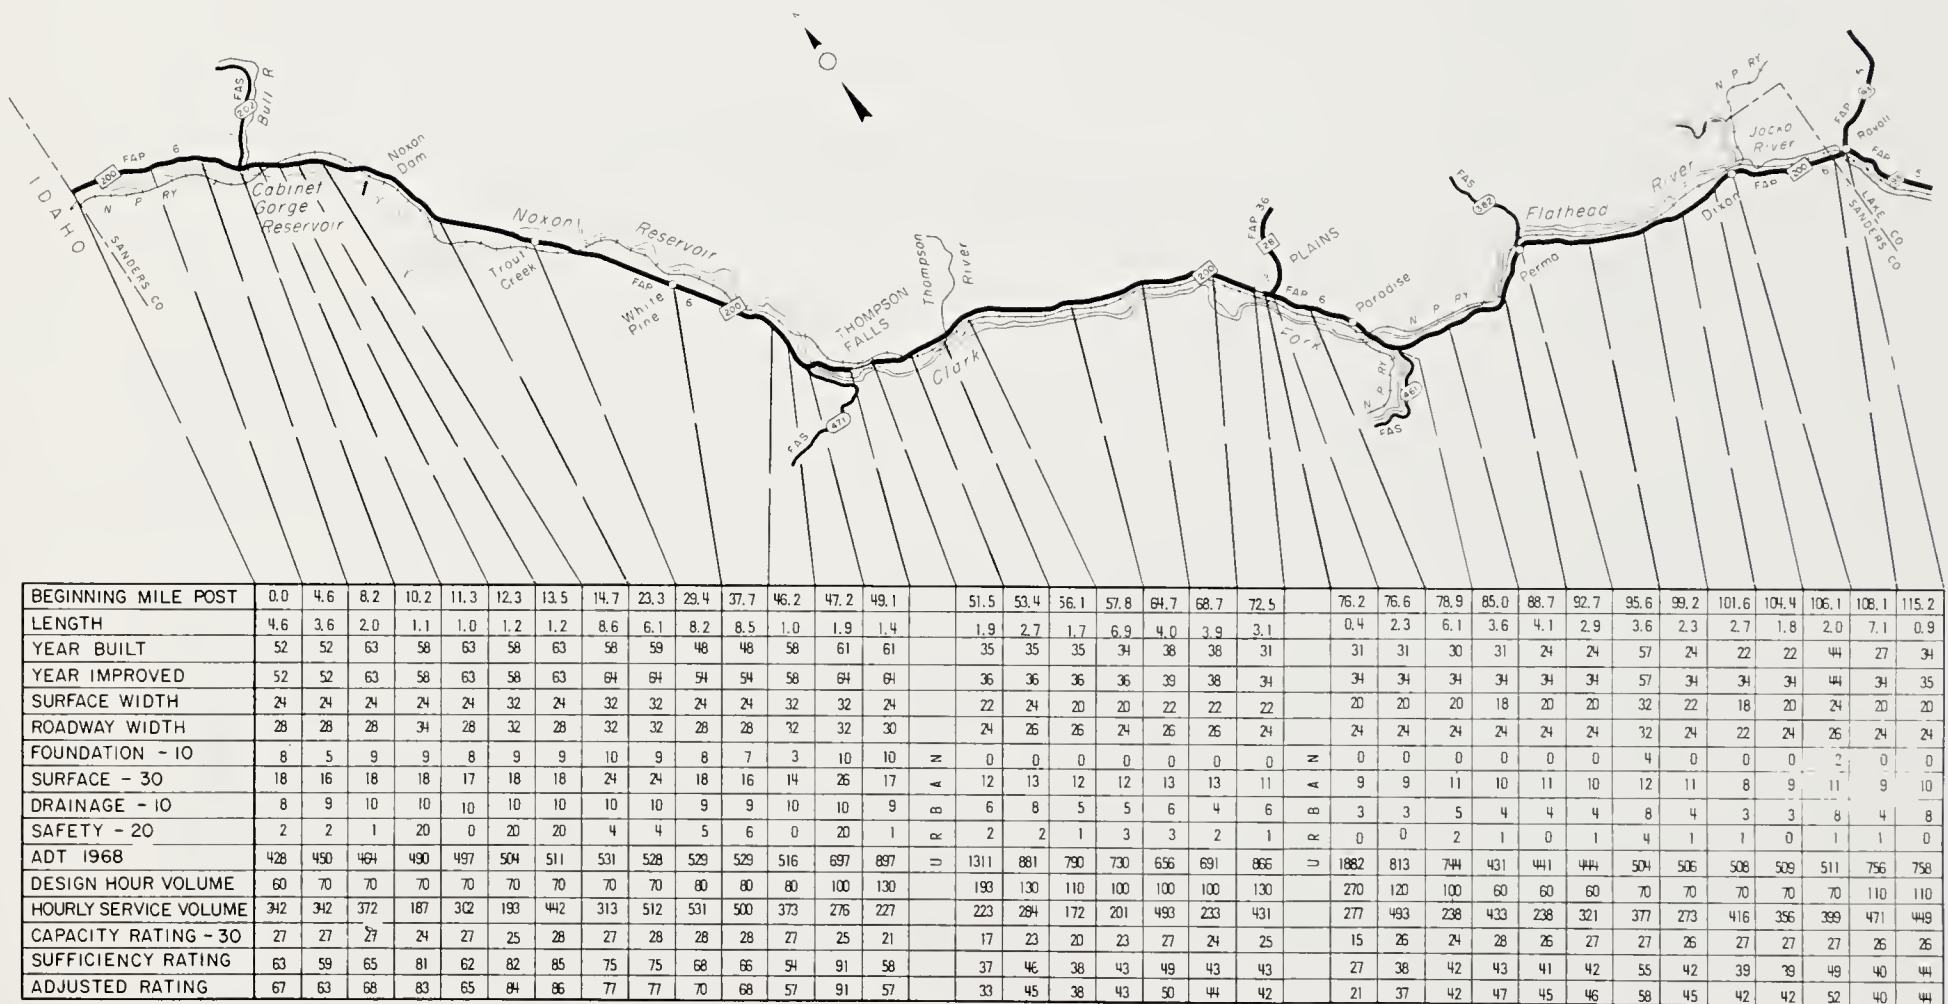

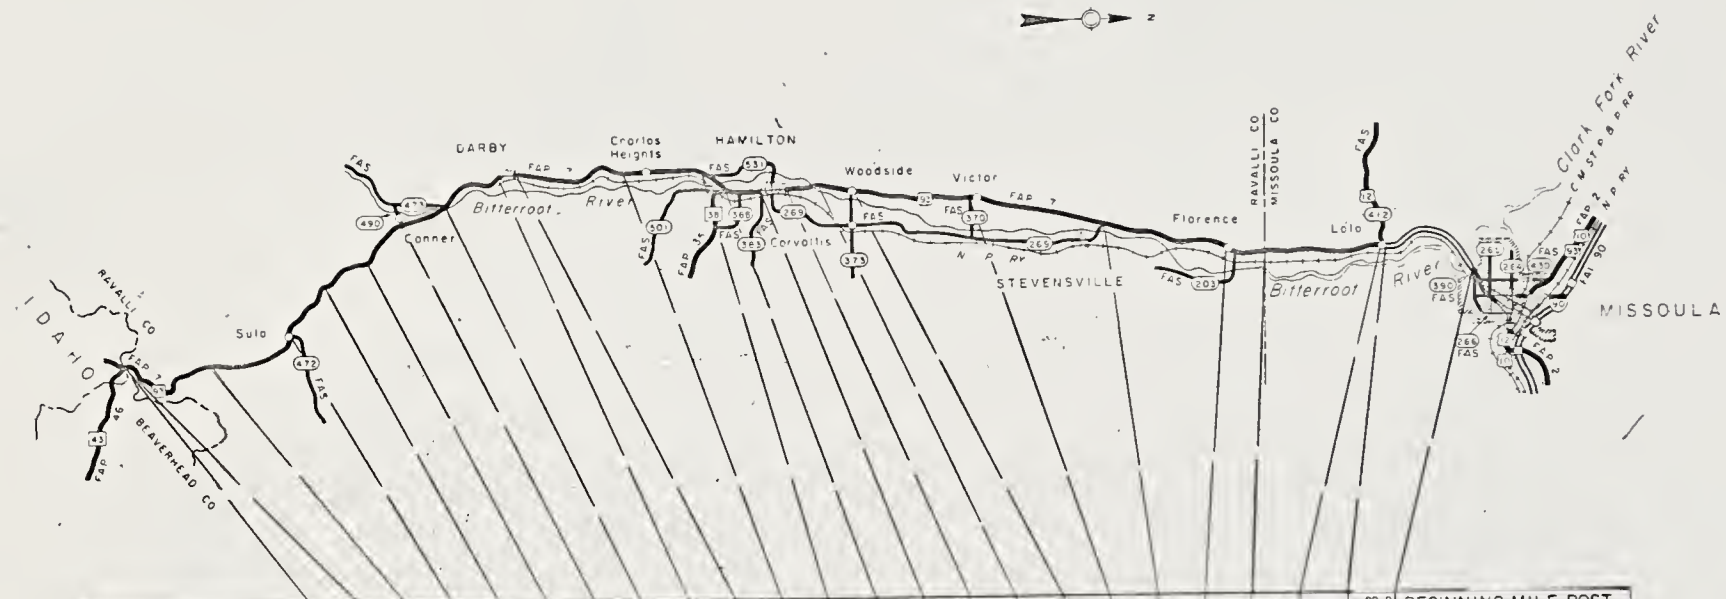

BEGINNING MILE POST	0.0	0.1	7.5	13.5	16.9	20.4	23.5	26.4		31.2	37.3	43.0	44.6		48.0	49.7	51.9	59.0	66.7	73.5	75.7	82.7	83.2	BEGINNING MILE POST
LENGTH	0.1	7.4	6.0	3.4	3.5	3.1	2.9	4.0		6.1	5.7	1.5	2.0		1.7	2.2	7.0	7.7	6.8	3.2	6.0	0.5	6.9	LENGTH
YEAR BUILT	34	35	35	36	37	37	36	36		34	34	49	34		31	53	53	56	56	30	30	68	68	YEAR BUILT
YEAR IMPROVED	40	40	40	39	39	39	36	36		35	35	49	35		34	53	53	61	61	32	32	68	68	YEAR IMPROVED
SURFACE WIDTH	22	22	22	24	24	22	22	22		22	22	30	22		22	24	24	32	32	22	22	44	68	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	26	26	24	26	26		24	24	30	24		26	32	32	32	32	24	24	44	68	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	0	0	0	0	N	0	0	7	0	N	0	7	7	10	10	0	0	10	10	FOUNDATION - 10
SURFACE - 30	14	12	13	14	13	13	12	11	N	12	13	16	11	N	12	16	18	25	25	13	12	30	30	SURFACE - 30
DRAINAGE - 10	5	5	6	7	7	7	6	6	N	6	7	9	4	N	4	10	10	10	10	4	5	10	10	DRAINAGE - 10
SAFETY - 20	0	5	2	2	2	2	1	3	N	2	2	1	1	N	1	1	7	8	7	1	1	20	20	SAFETY - 20
ADT 1968	495	495	500	575	560	541	631	1683	N	1759	1766	1806	2951	N	2592	2234	1744	1614	2097	2150	2594	2666	5110	ADT 1968
DESIGN HOUR VOLUME	60	60	60	70	70	70	110	220		230	230	230	380		340	290	230	210	270	280	340	350	660	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	281	281	365	343	343	368	468	448		255	491	354	480		737	648	648	594	594	273	378	294	2136	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	27	28	27	27	27	26	23		17	23	20	18		23	23	25	25	23	15	17	10	25	CAPACITY RATING - 30
SUFFICIENCY RATING	46	49	49	50	49	49	45	43		37	45	53	34		40	57	67	78	75	33	35	80	95	SUFFICIENCY RATING
ADJUSTED RATING	49	52	52	52	51	51	44	37		31	39	46	25		31	49	61	74	69	26	26	74	92	ADJUSTED RATING

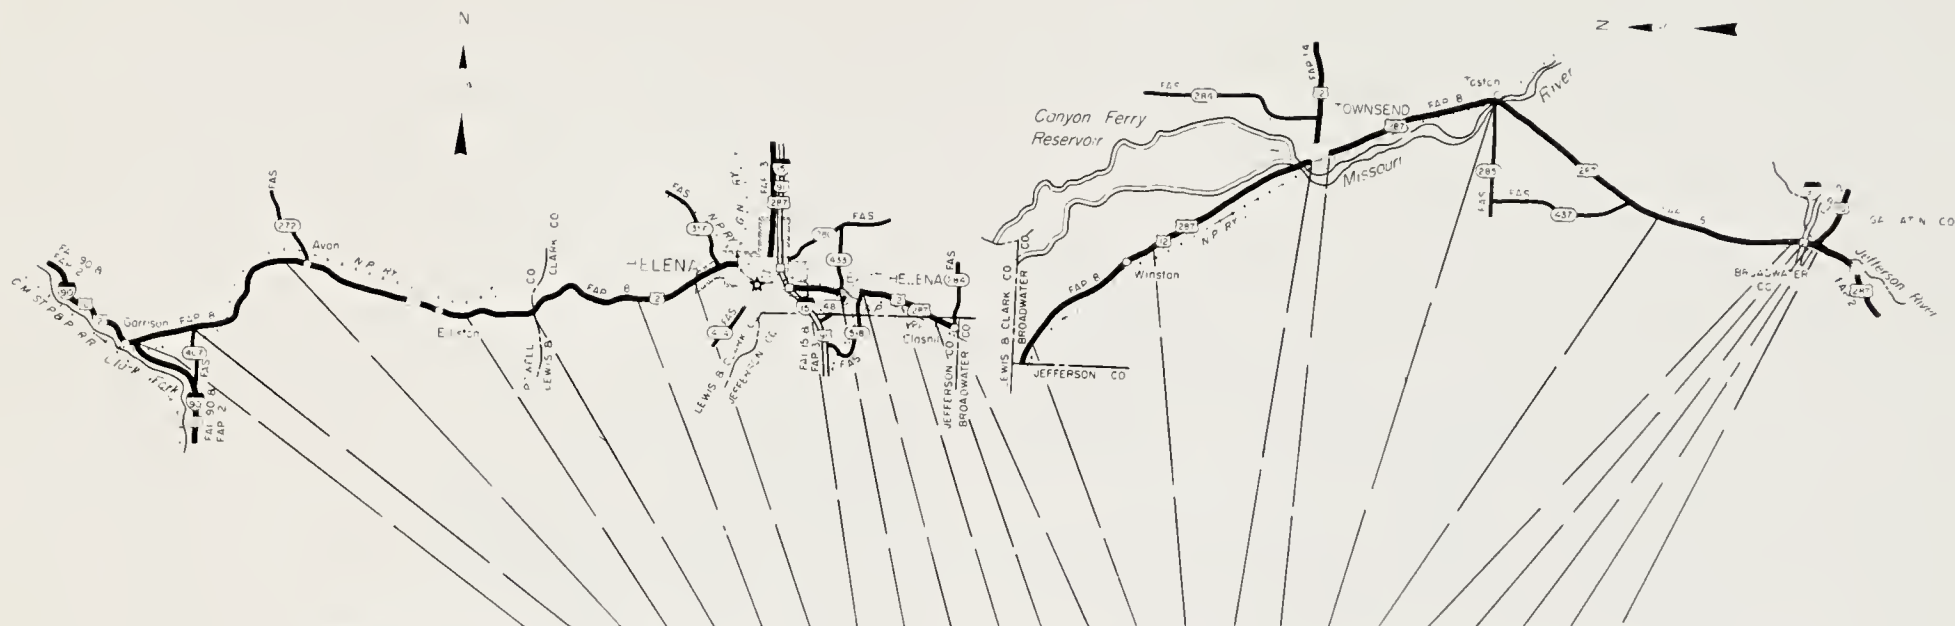

BEGINNING MILE POST	0.0	3.9	11.2	23.4	27.6	34.2		46.5	49.8	52.8	54.5	56.0	57.1	65.4		78.1	87.7	98.9	107.7	107.9	108.2	108.8	BEGINNING MILE POST
LENGTH	3.9	7.4	12.1	4.2	6.6	5.3		2.1	3.0	1.7	1.5	1.1	8.3	11.5		9.7	11.3	8.7	0.2	0.3	0.7	0.3	LENGTH
YEAR BUILT	31	57	33	31	32	33		36	36				37	56		39	50	52			52	68	YEAR BUILT
YEAR IMPROVED	34	64	34	35	35	33		36	36				37	66		40	51	52			52	68	YEAR IMPROVED
SURFACE WIDTH	22	32	22	22	22	22		24	24				24	32		24	24	24			24	44	SURFACE WIDTH
ROADWAY WIDTH	24	32	24	26	26	30		30	30				30	32		32	28	28			28	44	ROADWAY WIDTH
FOUNDATION - 10	0	10	0	0	0	0		0	0				0	10		0	6	6			6	10	FOUNDATION - 10
SURFACE - 30	11	27	10	10	12	15		15	13				11	29		15	19	18			18	30	SURFACE - 30
DRAINAGE - 10	6	10	8	3	3	8		3	7				7	10		10	10	10			10	10	DRAINAGE - 10
SAFETY - 20	1	7	3	3	3	2		1	2				6	6		10	3	17			0	1	SAFETY - 20
ADT 1968	1075	1029	1209	1301	1301	1977		4000	2368				1470	1498		1200	1238	1146			1262	1262	ADT 1968
DESIGN HOUR VOLUME	140	130	160	170	170	260		480	280				190	190		160	160	150			160	160	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	226	416	573	326	451	367		704	500				500	618		629	531	377			586	165	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	21	25	26	22	24	19		20	22				24	25		26	25	24			26	15	CAPACITY RATING - 30
SUFFICIENCY RATING	39	79	47	38	42	44		39	44				48	80		61	63	75			60	66	SUFFICIENCY RATING
ADJUSTED RATING	36	77	43	34	38	37		27	35				43	76		58	59	72			56	62	ADJUSTED RATING



BEGINNING MILE POST	0.0	1.9	12.4	20.1	20.8	29.4	38.5	39.9	43.1	46.0	53.8	60.0		BEGINNING MILE POST
LENGTH	2.2	10.5	7.7	0.8	8.5	9.1	1.3	3.3	2.8	7.8	6.1	4.0		LENGTH
YEAR BUILT	67	59	63	63	32	32	35	35	35	35	36	36		YEAR BUILT
YEAR IMPROVED	67	59	63	63	36	36	36	36	36	36	36	36		YEAR IMPROVED
SURFACE WIDTH	32	32	32	32	20	20	22	22	22	22	22	24		SURFACE WIDTH
ROADWAY WIDTH	32	32	32	32	22	22	24	24	24	24	24	26		ROADWAY WIDTH
FOUNDATION - 10	10	9	9	10	0	0	0	0	0	0	0	0		FOUNDATION - 10
SURFACE - 30	30	25	27	28	11	11	13	13	10	12	11	14		SURFACE - 30
DRAINAGE - 10	10	10	10	10	7	7	7	8	8	8	8	8		DRAINAGE - 10
SAFETY - 20	20	10	5	0	1	1	1	1	1	1	1	8		SAFETY - 20
ADT 1968	320	270	382	239	295	316	758	525	504	380	391	649		ADT 1968
DESIGN HOUR VOLUME	50	40	60	50	40	50	100	70	70	50	50	80		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	574	354	374	302	265	428	762	320	451	550	642	567		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	29	28	28	28	28	28	28	27	28	29	29	28		CAPACITY RATING - 30
SUFFICIENCY RATING	99	82	79	76	47	47	49	49	47	50	49	58		SUFFICIENCY RATING
ADJUSTED RATING	99	86	82	81	54	53	49	52	50	55	54	59		ADJUSTED RATING




BEGINNING MILE POST	3.5	7.1	9.6	16.2	20.0	29.7	39.5	44.3	52.6	55.1	63.9	72.4		80.0	89.4	97.0	104.4	109.5	BEGINNING MILE POST
LENGTH	3.6	2.5	6.5	3.8	9.7	9.8	4.8	8.0	2.8	8.8	8.5	6.9		9.4	7.6	7.4	5.1	1.8	LENGTH
YEAR BUILT	47	40	51	51	63	64	36	49	34	34	34	34		33	30	28	67	52	YEAR BUILT
YEAR IMPROVED	47	40	57	57	63	64	36	49	34	34	34	34		33	33	33	67	52	YEAR IMPROVED
SURFACE WIDTH	24	24	30	30	32	32	22	22	22	22	22	22		22	22	22	40	24	SURFACE WIDTH
ROADWAY WIDTH	32	30	30	30	32	32	26	24	24	24	24	24		24	24	24	40	32	ROADWAY WIDTH
FOUNDATION - 10	3	3	6	6	9	10	0	0	0	0	0	0		0	0	0	10	7	FOUNDATION - 10
SURFACE - 30	15	15	18	17	25	27	8	9	10	11	12	11		11	11	10	30	18	SURFACE - 30
DRAINAGE - 10	9	10	10	10	10	10	6	8	8	8	8	8		7	7	7	10	10	DRAINAGE - 10
SAFETY - 20	1	20	4	2	6	20	1	2	1	1	1	5		3	8	5	20	1	SAFETY - 20
ADT 1968	1527	1316	1249	1257	1346	1382	1030	1080	1016	958	780	828		1369	990	1002	1240	1278	ADT 1968
DESIGN HOUR VOLUME	200	170	160	160	180	180	140	140	130	120	100	110		180	130	130	160	170	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	580	663	449	478	528	594	737	451	381	435	408	702		486	510	732	294	580	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	25	26	25	25	25	25	27	25	25	26	26	28		24	26	28	21	26	CAPACITY RATING - 30
SUFFICIENCY RATING	53	74	63	60	75	92	42	44	44	46	47	52		45	52	50	91	62	SUFFICIENCY RATING
ADJUSTED RATING	48	71	59	56	72	90	39	41	42	44	47	51		41	50	48	89	58	ADJUSTED RATING

YELLOWSTONE NATIONAL PARK



BEGINNING MILE POST	0.0	5.5	16.6	19.3	31.0	37.1	40.7	49.9			60.5	62.2	64.5		75.4	80.4	83.6	91.9	BEGINNING MILE POST
LENGTH	5.6	10.9	2.7	11.6	6.2	3.5	9.2	1.9			1.8	2.3	10.2		5.1	3.2	8.3	6.0	LENGTH
YEAR BUILT	29		61	58	59	59	65	61			55	41	41		38	34	28	41	YEAR BUILT
YEAR IMPROVED	31	N	61	61	61	61	65	61			55	41	41		38	36	47	41	YEAR IMPROVED
SURFACE WIDTH	18	D	32	32	32	32	32	32			24	20	20		20	20	20	20	SURFACE WIDTH
ROADWAY WIDTH	24	I	32	32	32	32	32	32			36	24	24		24	24	24	24	ROADWAY WIDTH
FOUNDATION - 10	0	E	10	10	10	10	10	9			8	3	0		0	0	0	0	FOUNDATION - 10
SURFACE - 30	8	R	28	28	28	28	28	25			18	14	13		12	9	10	12	SURFACE - 30
DRAINAGE - 10	3	U	10	10	10	10	10	10			10	9	9		8	5	4	8	DRAINAGE - 10
SAFETY - 20	1	N	3	20	6	3	6	1			2	5	3		2	1	1	1	SAFETY - 20
ADT 196B	771	U	630	630	642	668	920	2569			1144	950	940		602	700	411	218	ADT 196B
DESIGN HOUR VOLUME	170	S	140	140	140	200	200	570			170	140	140		90	100	60	30	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	361	C	618	618	618	596	618	618			536	421	400		655	627	422	406	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	23	O	27	27	27	25	25	16			25	25	25		28	28	28	29	CAPACITY RATING - 30
SUFFICIENCY RATING	35	U	78	95	81	76	79	61			63	56	50		50	43	43	50	SUFFICIENCY RATING
ADJUSTED RATING	35		79	95	82	75	78	52			60	54	48		52	43	47	59	ADJUSTED RATING

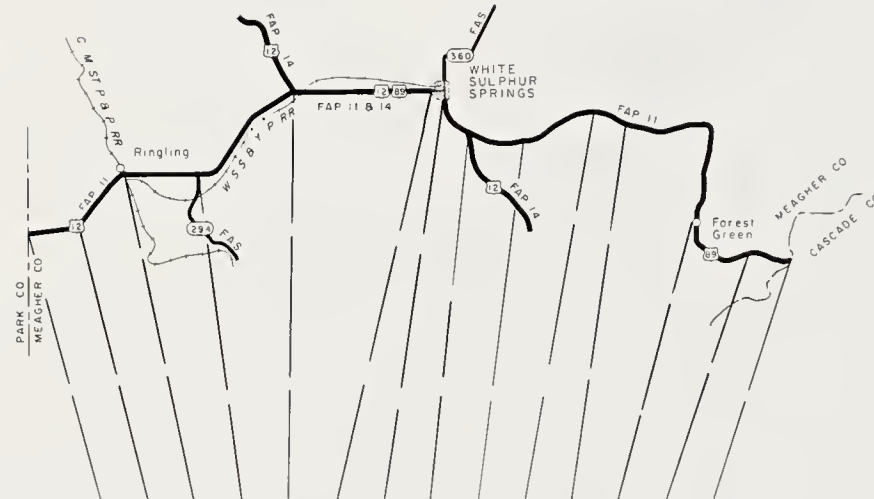



BEGINNING MILE POST	97.9	100.7	105.3	109.5	117.5		126.7	129.1	132.4	137.1	138.6	146.0	154.3	BEGINNING MILE POST
LENGTH	2.8	4.6	4.2	8.0	8.2		2.4	3.3	4.7	1.5	7.4	8.3	3.3	LENGTH
YEAR BUILT	41	31	31	31	33		65	55	55	55	53	55	59	YEAR BUILT
YEAR IMPROVED	41	36	36	36	36		65	56	56	56	63	63	63	YEAR IMPROVED
SURFACE WIDTH	20	20	20	20	20		40	28	28	28	26	26	40	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	24	24		40	28	36	28	26	26	40	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	0		10	4	4	4	9	9	9	FOUNDATION - 10
SURFACE - 30	12	12	12	14	11		30	15	15	16	23	24	22	SURFACE - 30
DRAINAGE - 10	8	8	8	8	8		10	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	1	1	1	1	3		1	3	9	1	7	8	2	SAFETY - 20
ADT 1968	214	216	291	340	1500		885	408	386	357	354	355	317	ADT 1968
DESIGN HOUR VOLUME	30	30	40	50	230		130	60	60	50	50	50	50	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	494	299	400	556	421		294	394	409	394	395	289	894	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	29	28	28	29	22		23	28	28	28	28	27	29	CAPACITY RATING - 30
SUFFICIENCY RATING	50	49	49	52	44		74	60	66	59	77	78	72	SUFFICIENCY RATING
ADJUSTED RATING	59	58	56	58	39		73	64	70	64	81	82	77	ADJUSTED RATING





BEGINNING MILE POST	157.7		168.0	178.4	182.7	189.3	200.9	204.5	211.4	217.3	BEGINNING MILE POST
LENGTH	7.2		10.5	4.2	6.7	11.1	3.6	7.0	5.9	1.1	LENGTH
YEAR BUILT	61		49	49	39		55	55	41	39	YEAR BUILT
YEAR IMPROVED	63		52	52	39		55	55	41	39	YEAR IMPROVED
SURFACE WIDTH	28		22	22	24		40	32	24	24	SURFACE WIDTH
ROADWAY WIDTH	28		26	26	26		40	32	32	32	ROADWAY WIDTH
FOUNDATION - 10	9		9	10	0		5	7	5	0	FOUNDATION - 10
SURFACE - 30	22		20	19	12		18	18	16	13	SURFACE - 30
DRAINAGE - 10	10		8	8	9		10	10	10	10	DRAINAGE - 10
SAFETY - 20	4		7	3	4		2	14	2	1	SAFETY - 20
ADT 1968	370		444	430	418		1774	2152	2417	3346	ADT 1968
DESIGN HOUR VOLUME	60		70	70	60		230	280	310	430	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	238		432	442	571		370	354	397	302	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	26		28	28	28		21	18	18	9	CAPACITY RATING - 30
SUFFICIENCY RATING	71		72	68	53		56	67	51	33	SUFFICIENCY RATING
ADJUSTED RATING	75		75	72	57		50	60	42	23	ADJUSTED RATING

BEGINNING MILE POST	0.0	2.2	8.0		BEGINNING MILE POST
LENGTH	2.3	5.8	0.6		LENGTH
YEAR BUILT	61	61	26		YEAR BUILT
YEAR IMPROVED	61	61	30		YEAR IMPROVED
SURFACE WIDTH	34	34	20		SURFACE WIDTH
ROADWAY WIDTH	34	34	24		ROADWAY WIDTH
FOUNDATION - 10	9.	9	0		FOUNDATION - 10
SURFACE - 30	24	24	10		SURFACE - 30
DRAINAGE - 10	10	10	3		DRAINAGE - 10
SAFETY - 20	1	6	0		SAFETY - 20
ADT 1968	1207	1461	1575		ADT 1968
DESIGN HOUR VOLUME	270	330	350		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	319	594	448		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	17	22	18		CAPACITY RATING - 30
SUFFICIENCY RATING	61	71	31		SUFFICIENCY RATING
ADJUSTED RATING	58	67	26		ADJUSTED RATING

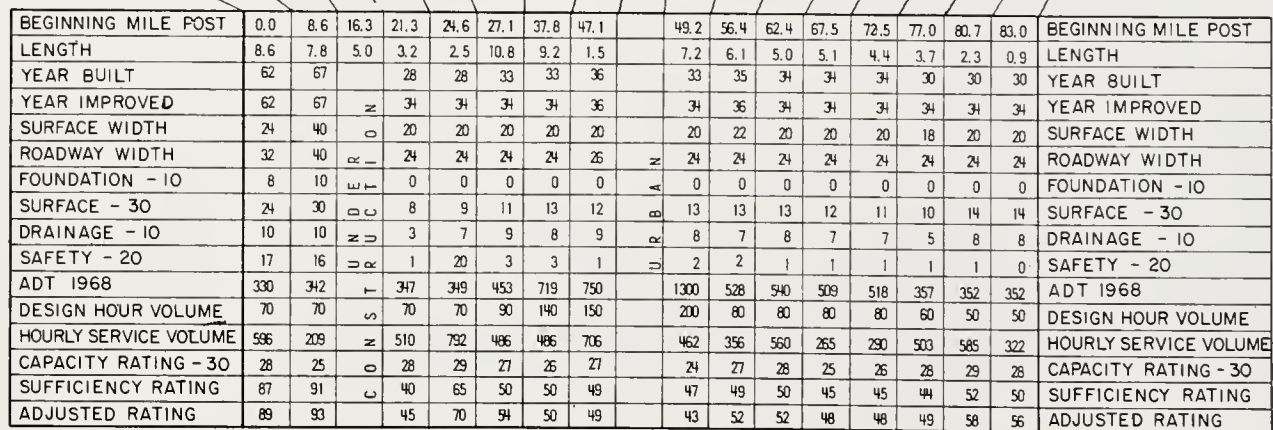


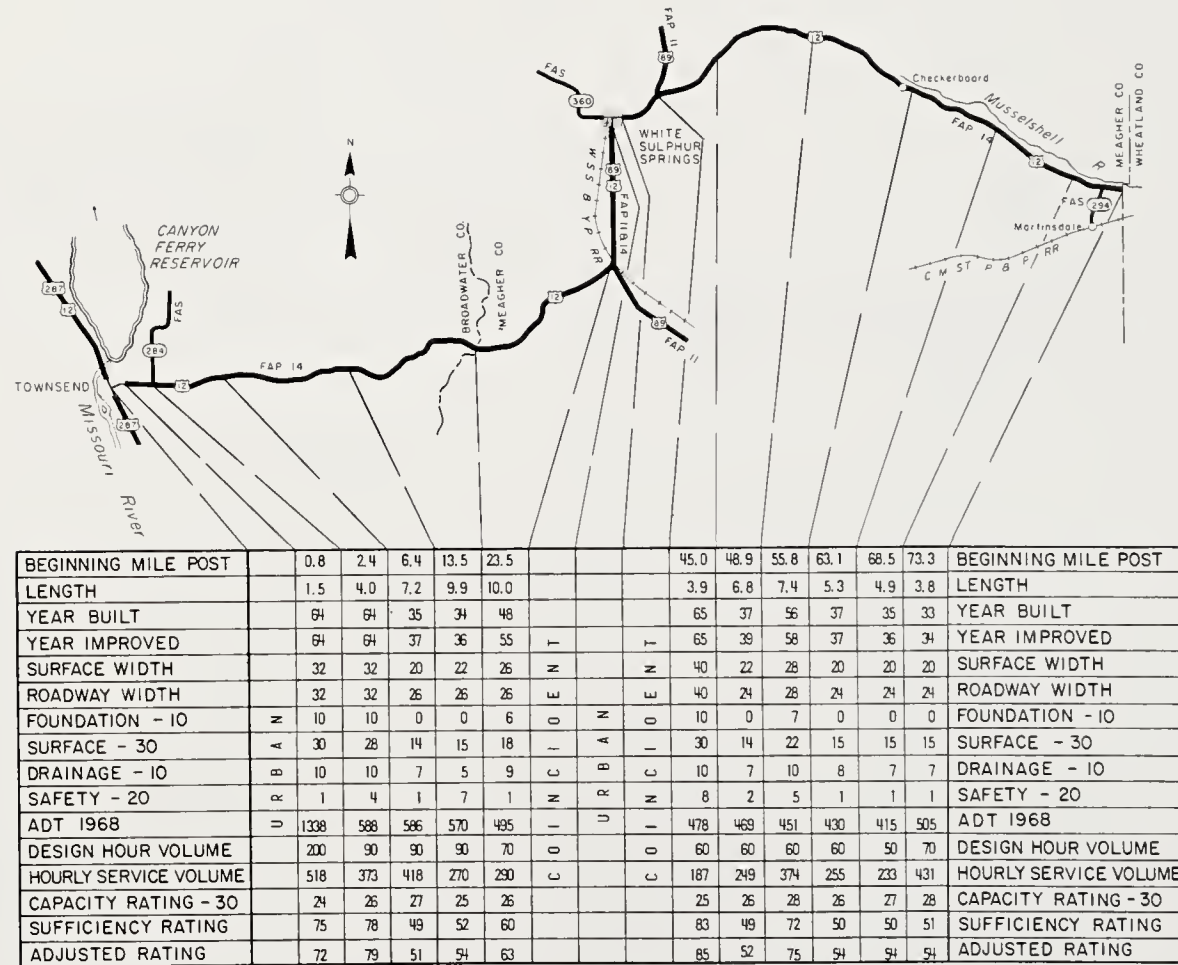

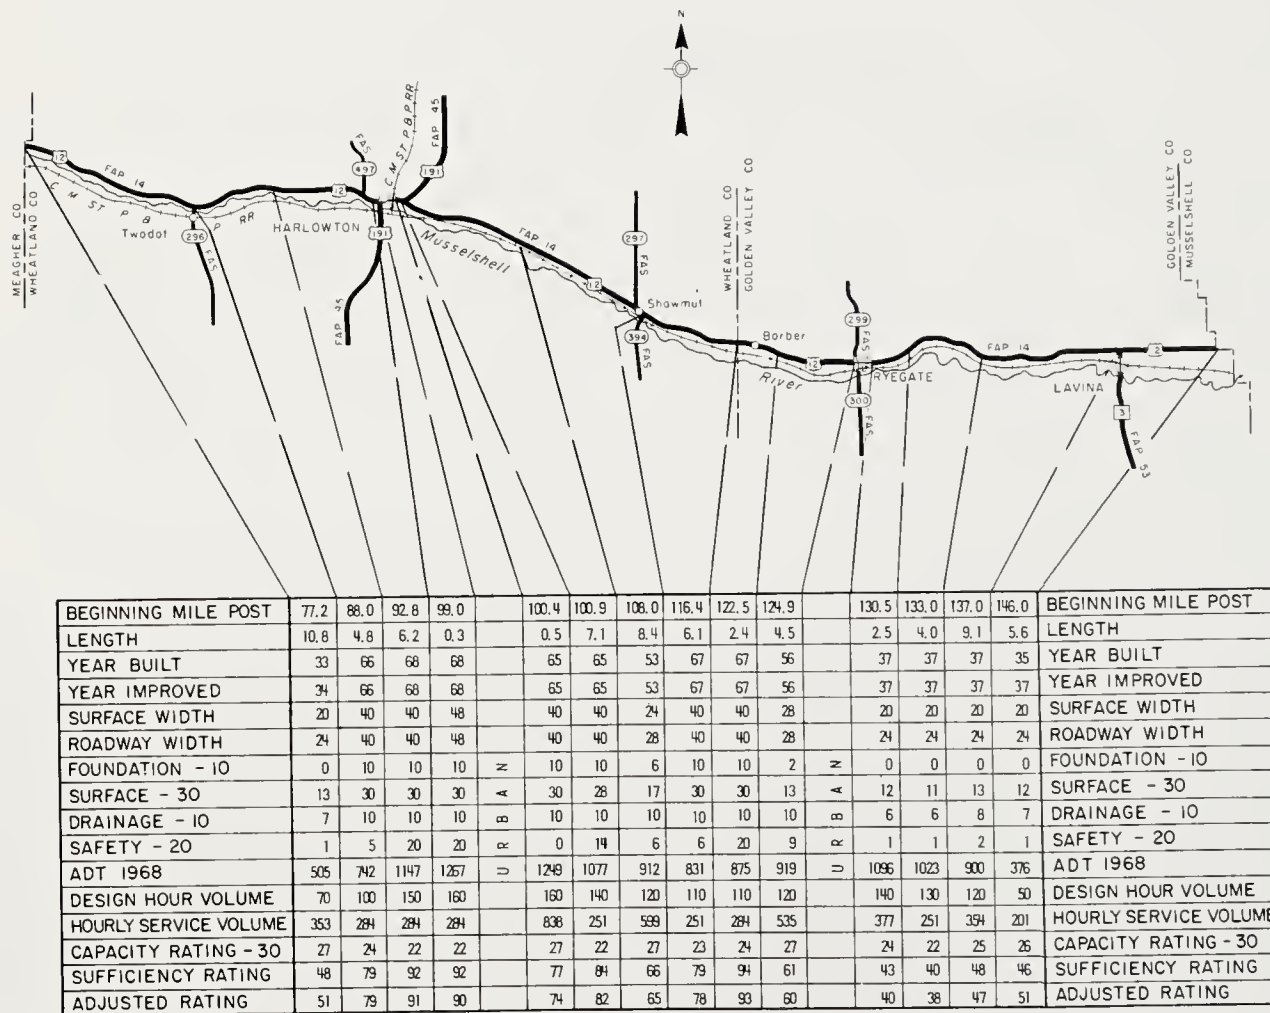

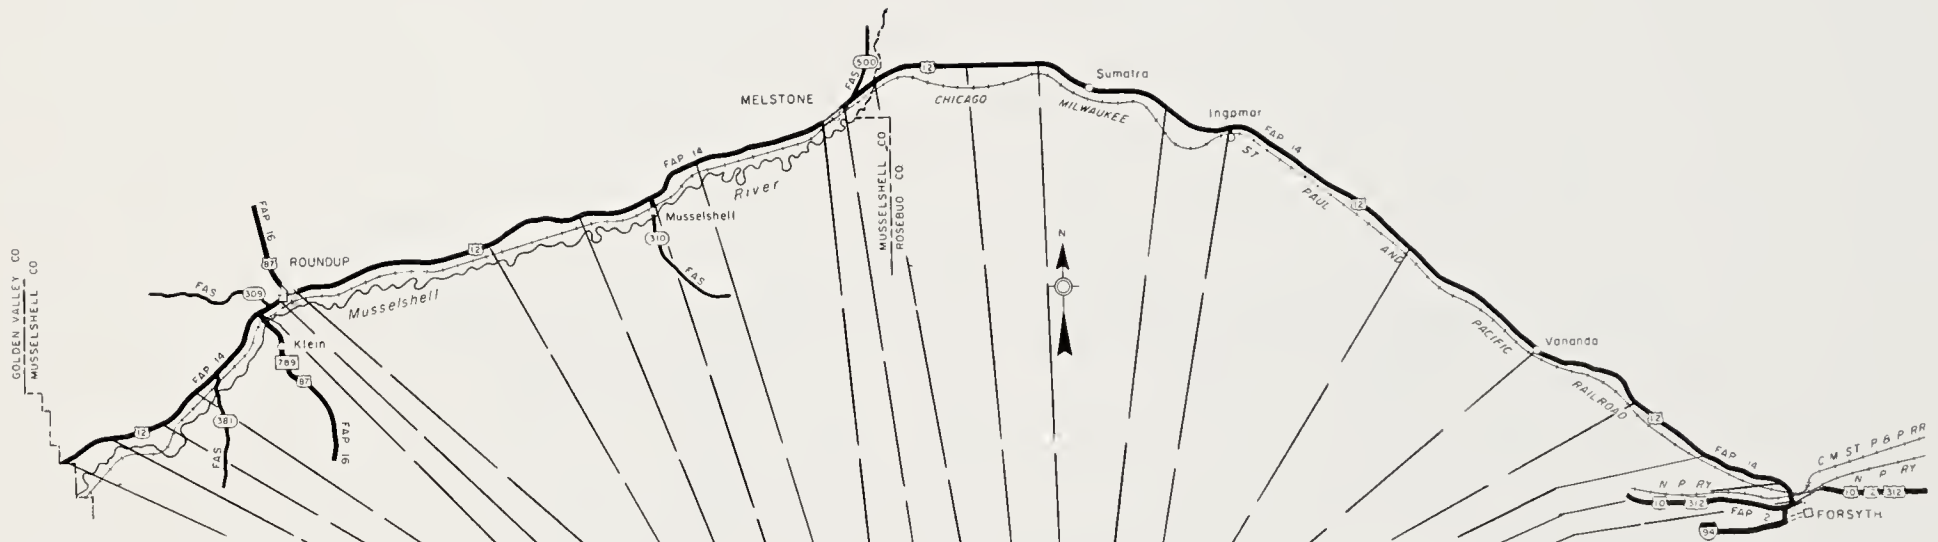

BEGINNING MILE POST	151.6	155.1	158.0	160.4	167.5		170.1	182.0	187.6	192.1	195.4		205.1	207.1	212.4	217.1	224.4	229.5	242.4	252.3	258.5	265.1	268.7	BEGINNING MILE POST
LENGTH	3.4	2.9	2.5	7.1	1.0		11.9	5.6	4.5	3.3	8.3		2.0	5.3	4.7	7.3	5.1	12.9	9.9	7.2	5.4	3.6	1.8	LENGTH
YEAR BUILT	35	56	56	36	32		36	37	37	37	37		46	46	46	47	47	41	40	38	37	57	59	YEAR BUILT
YEAR IMPROVED	37	56	56	36	33		39	39	39	39	39		46	46	46	48	48	48	40	54	54	57	59	YEAR IMPROVED
SURFACE WIDTH	20	24	24	20	26		20	20	20	20	20		22	20	20	20	22	20	20	24	24	32	32	SURFACE WIDTH
ROADWAY WIDTH	24	28	28	24	30		24	24	24	24	24		26	26	24	22	26	22	26	26	26	32	32	ROADWAY WIDTH
FOUNDATION - 10	0	3	7	0	0	N	0	0	0	0	0	N	0	0	0	0	0	0	0	5	4	7	8	FOUNDATION - 10
SURFACE - 30	12	13	18	12	13	A	13	14	12	12	12	A	12	12	11	13	13	10	12	17	16	18	18	SURFACE - 30
DRAINAGE - 10	6	9	10	6	6	B	10	8	8	8	9	B	10	10	10	10	10	9	9	10	10	10	10	DRAINAGE - 10
SAFETY - 20	0	2	2	1	2	R	1	2	2	1	4	R	1	2	1	3	5	2	4	2	2	20	1	SAFETY - 20
ADT 1968	298	319	326	574	2093	U	877	515	500	486	604	U	598	395	324	325	293	307	290	332	338	426	535	ADT 1968
DESIGN HOUR VOLUME	40	50	50	80	270		110	70	70	60	80		100	70	60	60	50	50	50	60	60	70	90	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	201	302	586	377	749		377	426	400	388	400		457	428	255	485	315	620	494	346	595	561	442	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	28	29	27	25		26	28	27	28	27		27	28	26	28	20	29	28	27	28	28	27	CAPACITY RATING - 30
SUFFICIENCY RATING	45	55	66	46	46		50	52	49	49	52		50	52	48	54	56	50	53	61	60	83	64	SUFFICIENCY RATING
ADJUSTED RATING	52	61	72	48	38		49	55	52	52	54		52	57	54	60	63	57	60	67	66	85	66	ADJUSTED RATING

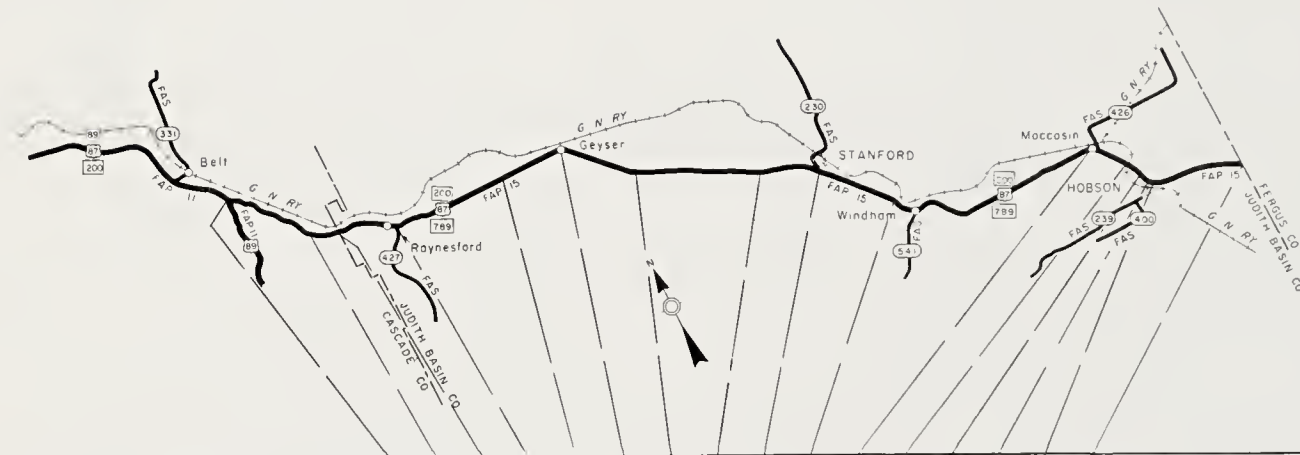

BEGINNING MILE POST	0.0	5.3	7.0	10.4	17.9	21.9	26.5	33.2	36.6	41.8	54.3	56.6	57.8		58.9	BEGINNING MILE PDST
LENGTH	5.4	1.8	3.3	7.5	4.0	4.7	6.6	3.4	5.2	12.4	2.3	1.1	0.9		5.5	LENGTH
YEAR BUILT	60	61	61	64	56	36	36	37	37	35	33	54	34		33	YEAR BUILT
YEAR IMPROVED	60	61	61	64	64	36	36	37	37	36	34	55	35		34	YEAR IMPROVED
SURFACE WIDTH	32	32	32	32	32	22	22	24	22	22	20	24	20		20	SURFACE WIDTH
ROADWAY WIDTH	32	32	32	32	32	24	24	30	30	24	24	32	24		24	ROADWAY WIDTH
FOUNDATION - ID	8	8	9	9	10	0	0	0	0	0	0	6	0		0	FOUNDATION - IO
SURFACE - 3D	23	26	27	26	30	12	12	13	12	11	12	16	11		12	SURFACE - 3D
DRAINAGE - ID	10	10	10	10	10	7	6	9	9	6	7	10	8		8	DRAINAGE - IO
SAFETY - 2D	11	4	3	7	4	9	2	2	1	4	1	2	0		1	SAFETY - 20
ADT 1968	1432	1419	1414	1300	1198	1176	1195	1379	1357	1306	1331	1334	1336		1348	ADT 1968
DESIGN HOUR VOLUME	170	170	170	150	140	140	140	160	160	160	160	160	160		160	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	385	416	416	374	488	431	244	522	254	683	556	503	365		377	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	24	24	24	24	26	25	21	25	21	26	26	25	23		24	CAPACITY RATING - 3D
SUFFICIENCY RATING	76	72	73	76	80	53	41	49	43	47	46	59	42		45	SUFFICIENCY RATING
ADJUSTED RATING	72	68	69	73	78	50	38	44	39	43	42	55	38		41	ADJUSTED RATING

BEGINNING MILE POST	364.4
LENGTH	1.7
YEAR BUILT	49
YEAR IMPROVED	49
SURFACE WIDTH	24
ROADWAY WIDTH	28
FOUNDATION - 10	3
SURFACE - 30	16
DRAINAGE - 10	8
SAFETY - 20	1
ADT 1968	932
DESIGN HOUR VOLUME	110
HOURLY SERVICE VOLUME	469
CAPACITY RATING - 30	26
SUFFICIENCY RATING	54
ADJUSTED RATING	52




BEGINNING MILE POST	64.4	64.9	66.9	73.5	76.9	79.3		83.1	88.2	93.3	97.0	103.2	112.9	121.7	123.2	131.0		136.5	137.6	148.7	156.7	BEGINNING MILE POST
LENGTH	0.5	2.0	6.5	3.4	2.4	1.8		5.1	5.1	3.7	6.2	9.7	8.7	1.5	7.8	4.6		1.1	11.0	8.0	1.6	LENGTH
YEAR BUILT	33	33	47	46	46	46		42	37	37	37	39	51	29	29	29		31	54	51	33	YEAR BUILT
YEAR IMPROVED	34	34	54	54	54	54		42	37	37	37	40	51	36	36	36		36	54	51	36	YEAR IMPROVED
SURFACE WIDTH	20	20	24	24	24	24		24	24	24	24	24	24	18	18	18		20	24	22	20	SURFACE WIDTH
ROADWAY WIDTH	24	24	32	32	32	32		30	30	32	32	32	26	22	22	22		22	26	26	24	ROADWAY WIDTH
FOUNDATION - 10	0	0	7	8	8	8		3	0	0	0	0	0	0	0	0		0	5	0	0	FOUNDATION - 10
SURFACE - 30	12	11	18	18	18	20		17	16	16	16	15	13	12	10	11		8	17	13	9	SURFACE - 30
DRAINAGE - 10	8	8	9	9	9	9		10	8	8	10	9	9	5	7	7		10	10	8	9	DRAINAGE - 10
SAFETY - 20	0	1	13	3	2	1		5	1	2	1	2	1	0	1	1		1	2	1	0	SAFETY - 20
ADT 1968	1338	1371	1500	1618	1874	1620		1036	760	735	713	726	445	319	304	328		389	385	349	315	ADT 1968
DESIGN HOUR VOLUME	160	160	180	190	220	190		130	100	100	90	90	70	50	50	50		60	60	50	50	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	634	302	536	353	536	503		416	215	353	503	539	728	392	573	296		568	413	468	444	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	26	22	25	22	24	24		25	23	26	27	28	29	28	29	27		28	28	28	28	CAPACITY RATING - 30
SUFFICIENCY RATING	46	42	72	60	61	62		60	48	52	54	54	52	45	47	46		47	62	50	46	SUFFICIENCY RATING
ADJUSTED RATING	42	38	68	54	54	57		58	48	52	54	54	56	51	54	52		52	67	56	52	ADJUSTED RATING



BEGINNING MILE POST	158.3	161.5	171.2	180.2	188.5	192.2	203.5	212.1		213.1	218.0	226.7	238.9	241.4	242.5	BEGINNING MILE POST
LENGTH	3.1	9.8	8.1	8.2	3.6	11.3	8.6	0.3		5.0	8.7	12.2	2.5	1.0	6.1	LENGTH
YEAR BUILT	33	68	36	36	36	36	36	37		36	36	40	38	68	36	YEAR BUILT
YEAR IMPROVED	36	68	47	48	48	49	49	37		37	36	54	54	68	54	YEAR IMPROVED
SURFACE WIDTH	22	36	20	22	22	22	22	22		22	22	22	24	36	24	SURFACE WIDTH
ROADWAY WIDTH	24	36	24	24	24	26	26	26		26	24	26	26	36	26	ROADWAY WIDTH
FOUNDATION - 10	0	10	0	0	0	0	0	0		0	0	0	0	10	0	FOUNDATION - 10
SURFACE - 30	12	30	12	10	10	11	10	10		11	10	14	12	30	13	SURFACE - 30
DRAINAGE - 10	7	10	7	8	8	9	9	8		8	8	8	9	10	9	DRAINAGE - 10
SAFETY - 20	0	20	1	1	1	1	1	0		2	1	1	1	20	1	SAFETY - 20
ADT 1968	298	298	257	250	244	294	474	683		453	358	299	295	292	290	ADT 1968
DESIGN HOUR VOLUME	50	50	40	40	40	40	70	100		70	50	40	40	40	40	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	426	164	220	388	388	212	232	360		454	428	233	333	175	470	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	25	27	28	28	27	25	26		28	28	27	28	27	29	CAPACITY RATING - 30
SUFFICIENCY RATING	47	95	47	47	47	48	45	44		49	47	50	50	97	52	SUFFICIENCY RATING
ADJUSTED RATING	54	96	55	55	55	55	48	45		53	52	57	57	97	58	ADJUSTED RATING




BEGINNING MILE POST	248.6	256.5	262.3	267.5		279.7	280.7	287.6	289.8	296.8	302.0	306.4	316.6		BEGINNING MILE POST
LENGTH	8.0	5.8	5.2	10.9		1.0	6.9	2.1	7.1	5.2	4.5	10.2	8.0		LENGTH
YEAR BUILT	39	39	37	41		66	66	65	65	32	32	67	61		YEAR BUILT
YEAR IMPROVED	54	54	42	49		66	66	65	65	36	36	67	61		YEAR IMPROVED
SURFACE WIDTH	22	22	22	24		32	32	32	32	20	20	40	32		SURFACE WIDTH
ROADWAY WIDTH	26	26	26	26		32	32	32	32	24	24	40	32		ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	N	10	10	10	10	0	0	10	9	N	FOUNDATION - 10
SURFACE - 30	11	12	11	11	A	30	30	30	30	13	12	30	22	A	SURFACE - 30
DRAINAGE - 10	9	9	8	10		10	10	10	10	8	8	10	10		DRAINAGE - 10
SAFETY - 20	1	1	1	2	R	1	14	1	4	1	9	10	16	R	SAFETY - 20
ADT 1968	295	335	402	520	U	861	555	430	404	475	629	676	746	U	ADT 1968
DESIGN HOUR VOLUME	40	50	60	80		130	80	60	60	70	80	90	100		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	233	255	277	333		488	512	331	488	238	738	264	594		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	27	27	27	26		26	28	27	28	26	28	25	27		CAPACITY RATING - 30
SUFFICIENCY RATING	48	49	47	49		77	92	78	82	48	57	85	84		SUFFICIENCY RATING
ADJUSTED RATING	55	55	52	52		76	92	81	85	51	58	85	84		ADJUSTED RATING

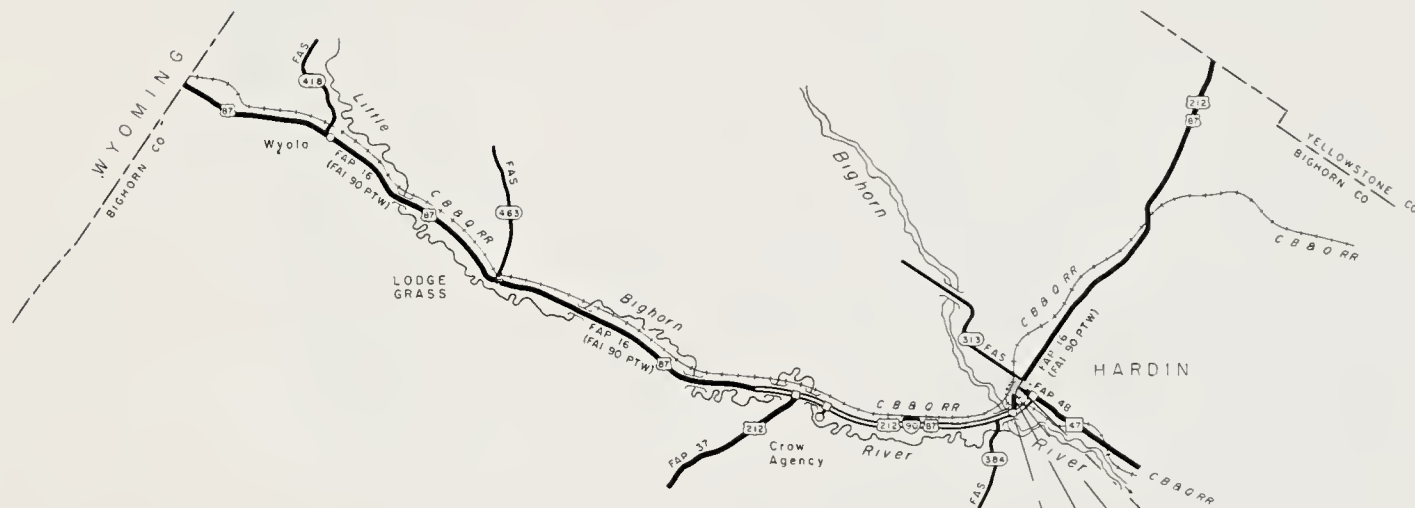


BEGINNING MILE POST	55.0	55.3	
LENGTH	0.3	0.9	
YEAR BUILT		31	
YEAR IMPROVED		34	
SURFACE WIDTH		22	
ROADWAY WIDTH		24	
FOUNDATION - 10		0	
SURFACE - 30		10	
DRAINAGE - 10		4	
SAFETY - 20		20	
ADT 1968		287	
DESIGN HOUR VOLUME		30	
HOURLY SERVICE VOLUME		762	
CAPACITY RATING - 30		29	
SUFFICIENCY RATING		63	
ADJUSTED RATING		70	




BEGINNING MILE POST	108.6	113.8	120.9	125.5	127.3	129.1	133.6	142.1	150.2			155.1	161.0	170.1	BEGINNING MILE POST
LENGTH	5.1	7.1	4.6	1.7	1.8	4.5	8.5	8.0	1.8			6.0	9.0	5.8	LENGTH
YEAR BUILT	30	30	30	68	30	30	67	65	32			51	33	33	YEAR BUILT
YEAR IMPROVED	34	34	34	68	34	34	67	65	33			54	35	35	YEAR IMPROVED
SURFACE WIDTH	22	22	20	40	20	22	32	32	22			24	20	20	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	40	24	24	32	32	24			30	24	24	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	10	0	0	10	10	0			3	0	0	FOUNDATION - 10
SURFACE - 30	12	13	12	30	14	12	30	28	11			15	11	13	SURFACE - 30
DRAINAGE - 10	7	6	7	10	7	6	10	10	8			10	4	5	DRAINAGE - 10
SAFETY - 20	1	1	1	20	1	1	8	8	0			4	1	1	SAFETY - 20
ADT 1968	1263	969	841	801	782	797	875	1243	1533			934	808	595	ADT 1968
DESIGN HOUR VOLUME	160	130	110	100	100	100	110	160	200			120	100	80	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	202	244	258	92	220	265	400	549	271			340	258	394	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	18	22	24	14	23	24	26	26	19			25	24	27	CAPACITY RATING - 30
SUFFICIENCY RATING	38	42	44	84	45	43	84	82	38			57	40	46	SUFFICIENCY RATING
ADJUSTED RATING	34	40	43	83	45	43	83	80	33			55	39	48	ADJUSTED RATING

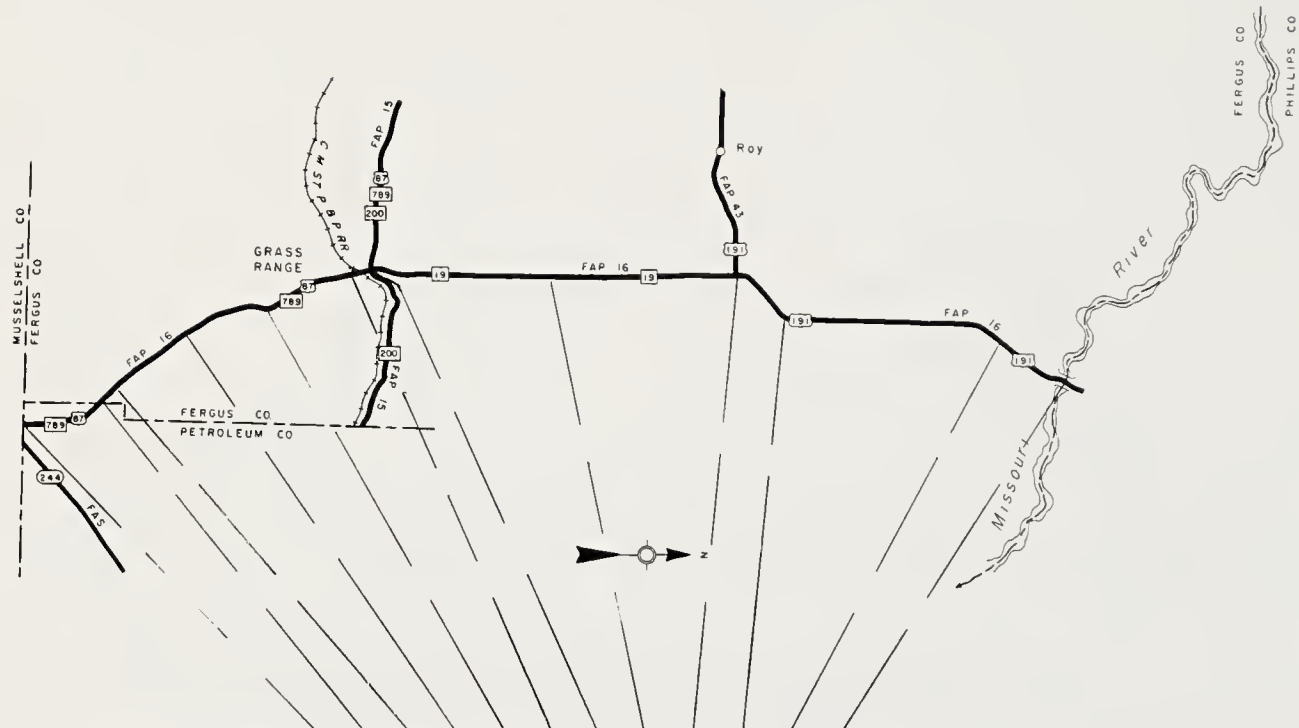


BEGINNING MILE POST	175.8	180.5	181.7	187.8	192.7	197.5	199.1	208.8	220.6	224.5	237.4	BEGINNING MILE POST
LENGTH	4.7	1.1	6.1	4.9	4.9	1.6	9.7	11.8	3.9	13.0	4.6	LENGTH
YEAR BUILT	63	63	65	52	41	62	62	61	62	59	59	YEAR BUILT
YEAR IMPROVED	63	63	65	52	41	62	62	61	62	59	60	YEAR IMPROVED
SURFACE WIDTH	30	30	30	24	22	32	30	30	30	28	28	SURFACE WIDTH
ROADWAY WIDTH	30	30	30	28	28	32	30	30	30	28	28	ROADWAY WIDTH
FOUNDATION - 10	10	10	10	7	3	7	7	7	7	4	4	FOUNDATION - 10
SURFACE - 30	27	26	28	17	17	21	20	19	23	17	16	SURFACE - 30
DRAINAGE - 10	10	10	10	10	9	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	5	1	2	10	1	1	4	20	4	20	5	SAFETY - 20
AOT 1968	439	440	443	452	584	584	248	246	331	257	280	AOT 1968
DESIGN HOUR VOLUME	60	60	60	60	80	80	40	40	60	40	50	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	488	484	488	377	313	512	470	494	350	518	373	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	28	28	28	26	28	29	29	27	29	28	CAPACITY RATING - 30
SUFFICIENCY RATING	80	75	78	72	56	67	70	85	71	80	63	SUFFICIENCY RATING
ADJUSTED RATING	82	78	81	75	58	69	77	89	76	85	70	ADJUSTED RATING

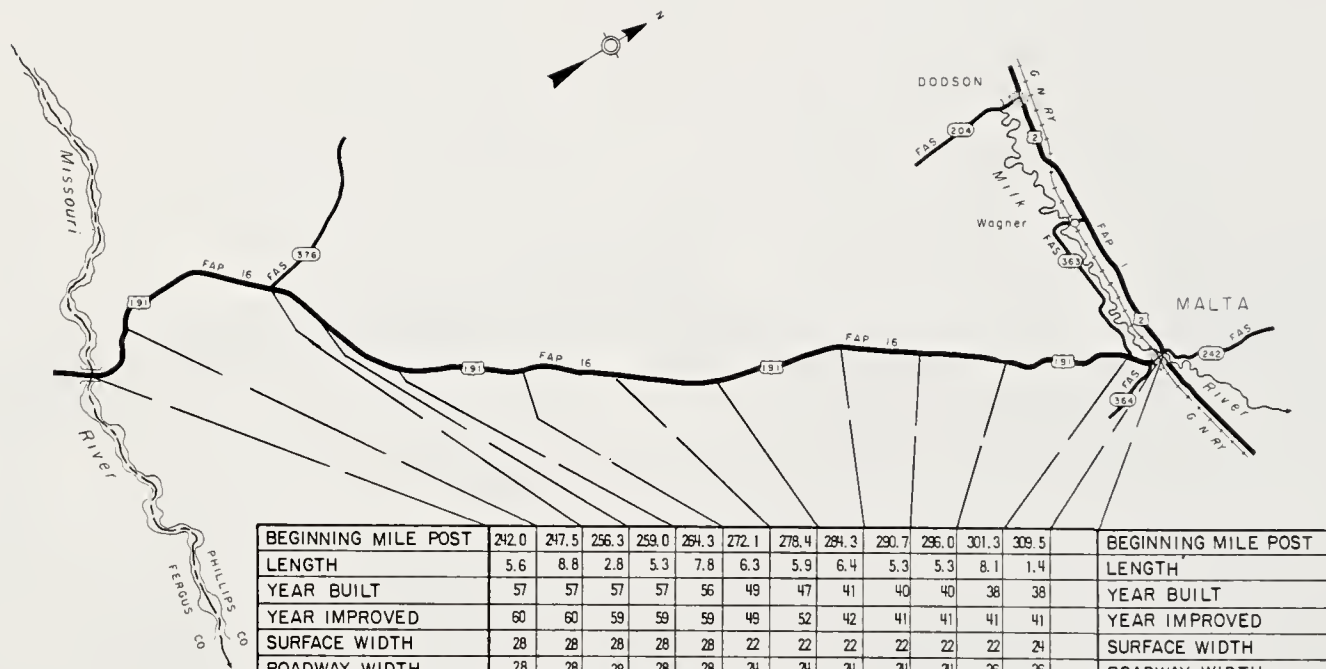


BEGINNING MILE POST	242.0	247.5	256.3	259.0	264.3	272.1	278.4	284.3	290.7	296.0	301.3	309.5	BEGINNING MILE POST
LENGTH	5.6	8.8	2.8	5.3	7.8	6.3	5.9	6.4	5.3	5.3	8.1	1.4	LENGTH
YEAR BUILT	57	57	57	57	56	49	47	41	40	40	38	38	YEAR BUILT
YEAR IMPROVED	60	60	59	59	59	49	52	42	41	41	41	41	YEAR IMPROVED
SURFACE WIDTH	28	28	28	28	28	22	22	22	22	22	22	24	SURFACE WIDTH
ROADWAY WIDTH	28	28	28	28	28	24	24	24	24	24	26	26	ROADWAY WIDTH
FOUNDATION - 10	5	5	5	5	8	0	0	0	0	0	0	0	FOUNDATION - 10
SURFACE - 30	19	18	18	19	23	14	14	13	12	12	12	12	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	7	8	8	8	9	8	8	DRAINAGE - 10
SAFETY - 20	6	18	20	3	5	2	1	2	4	2	8	1	SAFETY - 20
ADT 1968	284	274	258	182	187	192	193	203	209	253	418	1062	ADT 1968
DESIGN HOUR VOLUME	50	50	40	30	30	30	30	30	40	40	70	150	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	373	470	290	535	395	295	320	462	485	273	362	467	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	28	28	29	29	28	29	29	29	28	27	25	CAPACITY RATING - 30
SUFFICIENCY RATING	68	79	81	66	75	51	52	52	53	51	55	46	SUFFICIENCY RATING
ADJUSTED RATING	74	84	86	75	83	61	62	62	62	59	59	43	ADJUSTED RATING

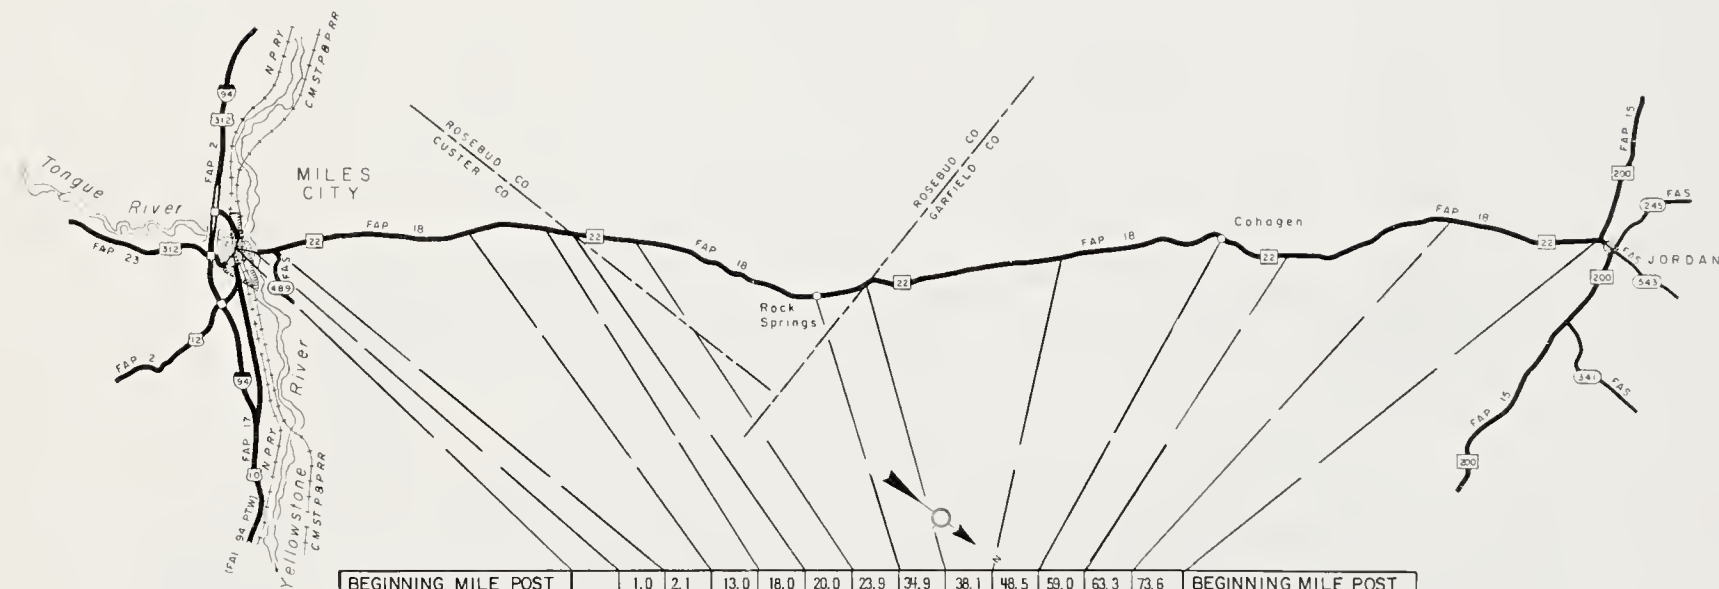


BEGINNING MILE POST		1.0	2.1	13.0	18.0	20.0	23.9	34.9	38.1	48.5	59.0	63.3	73.6	BEGINNING MILE POST
LENGTH		1.2	10.9	5.0	2.0	3.9	10.9	3.2	10.4	10.5	4.4	10.2	9.4	LENGTH
YEAR BUILT		57	64	63	33	33	31	31	31	31	29	67	58	YEAR BUILT
YEAR IMPROVED		57	64	63	35	35	35	35	35	35	35	67	65	YEAR IMPROVED
SURFACE WIDTH		32	30	30	20	20	20	20	18	18	18	30	28	SURFACE WIDTH
ROADWAY WIDTH		32	30	30	22	22	22	22	22	22	22	30	28	ROADWAY WIDTH
FOUNDATION - 10		9	8	8	0	0	0	0	0	0	0	10	10	FOUNDATION - 10
SURFACE - 30	A	24	26	24	11	11	10	10	10	9	10	30	30	SURFACE - 30
DRAINAGE - 10	B	10	10	10	8	8	7	7	7	5	5	10	10	DRAINAGE - 10
SAFETY - 20	R	0	11	2	0	1	1	0	1	1	1	7	2	SAFETY - 20
ADT 1968	D	1230	630	276	244	224	218	156	164	180	193	210	250	ADT 1968
DESIGN HOUR VOLUME		170	80	40	30	30	30	20	20	20	30	30	30	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME		328	445	477	312	292	337	317	326	342	266	477	424	HOURLY SERVICE VOLUME
CAPACITY RATING - 30		22	27	29	29	28	29	29	29	29	28	29	29	CAPACITY RATING - 30
SUFFICIENCY RATING		65	82	73	48	48	47	46	47	44	44	86	81	SUFFICIENCY RATING
ADJUSTED RATING		61	83	79	56	57	56	58	58	54	54	90	86	ADJUSTED RATING

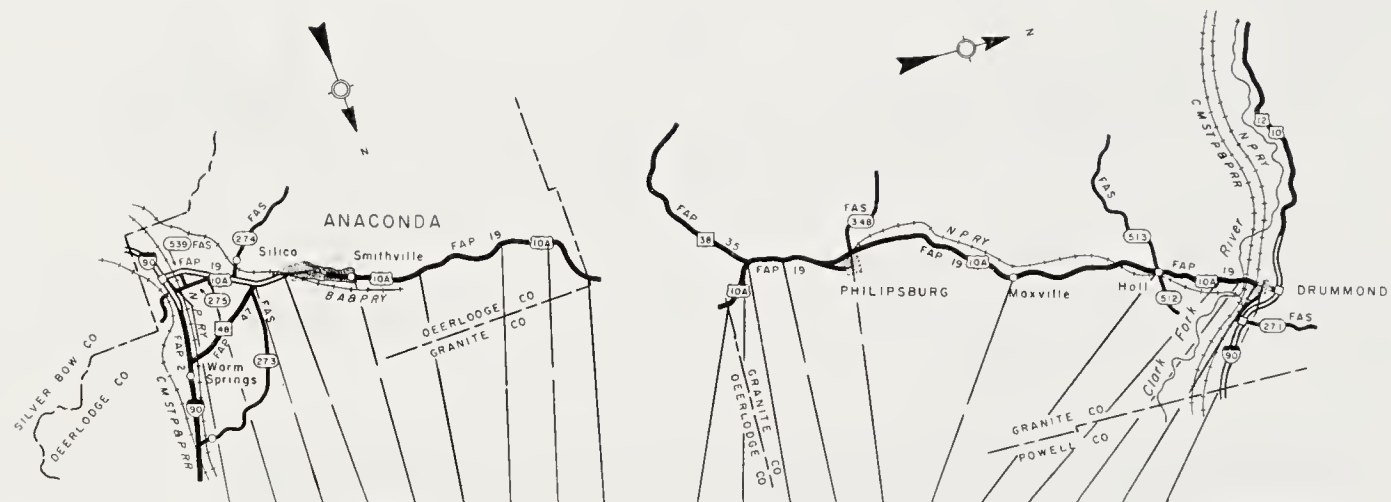

BEGINNING MILE POST	0.0	2.9	5.5		12.3	16.8	22.0	24.3		27.7	30.8	31.6	34.4	38.5	48.3	57.4	62.5	63.1		BEGINNING MILE POST
LENGTH	2.9	2.7	1.5		4.4	5.2	2.3	3.4		3.1	0.8	2.7	4.2	9.7	9.1	5.1	0.6	0.4		LENGTH
YEAR BUILT	64	61	51		51	57	59	34		34	57	57	57	60	31	26	66	66		YEAR BUILT
YEAR IMPROVED	64	61	59		59	59	59	40		40	57	57	57	60	34	34	66	66		YEAR IMPROVED
SURFACE WIDTH	76	76	76		28	32	32	20		22	32	32	32	32	18	18	40	32		SURFACE WIDTH
ROADWAY WIDTH	76	76	76		28	32	32	26		28	32	32	32	32	24	22	40	32		ROADWAY WIDTH
FOUNDATION - 10	10	10	10	N	7	7	6	0		3	7	6	7	10	0	0	10	10	N	FOUNDATION - 10
SURFACE - 30	28	26	26	A	18	18	17	12		14	17	15	17	25	11	11	30	30	A	SURFACE - 30
DRAINAGE - 10	10	10	10		10	10	8	7		6	10	10	10	10	3	3	10	10		DRAINAGE - 10
SAFETY - 20	6	5	3	R	3	3	2	1		2	0	20	3	10	2	1	0	0	R	SAFETY - 20
ADT 1968	2418	3081	4389	D	1131	1019	849	687		521	584	590	599	542	600	925	991	564	D	ADT 1968
DESIGN HOUR VOLUME	310	400	570		150	150	120	100		80	80	90	90	80	90	130	140	80		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	2232	2232	2256		447	399	420	499		336	313	406	420	441	392	481	284	639		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	27	26		25	24	26	27		26	26	27	27	27	27	26	23	28		CAPACITY RATING - 30
SUFFICIENCY RATING	82	78	75		63	62	59	47		51	60	78	64	82	43	41	73	78		SUFFICIENCY RATING
ADJUSTED RATING	77	71	65		60	60	58	48		54	62	79	65	83	45	39	71	79		ADJUSTED RATING

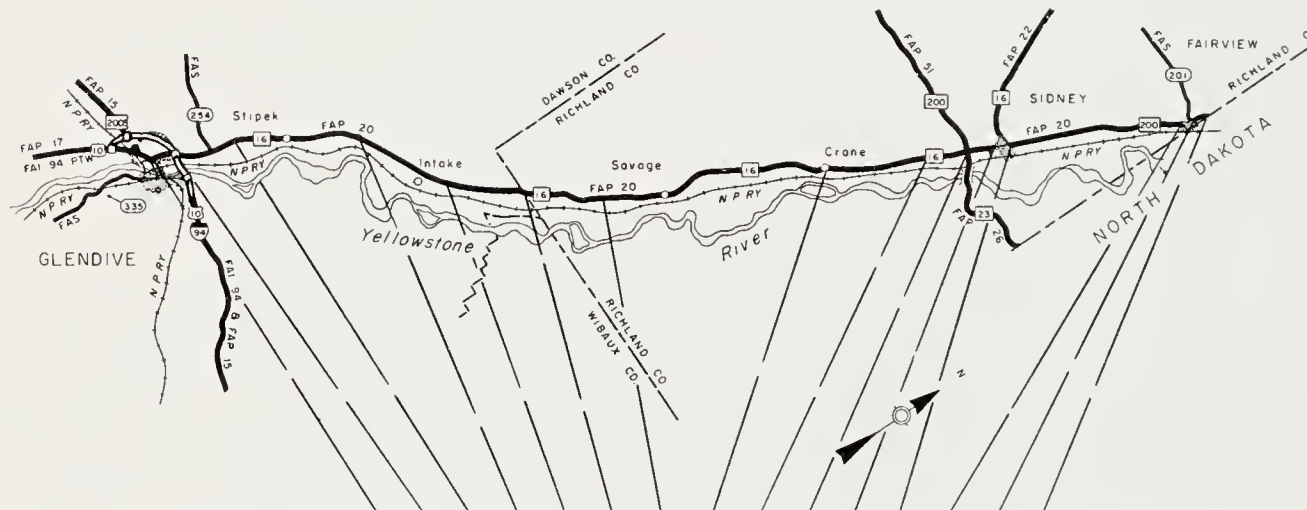


BEGINNING MILE POST	1.7	6.1	13.0	18.9	23.1	28.9	41.7	47.9	50.0	52.5	63.8	BEGINNING MILE POST
LENGTH	4.4	6.9	5.6	4.2	5.8	12.8	6.1	2.1	1.7	10.0	0.3	LENGTH
YEAR BUILT	64	67		54	54	33	28	36	36	35	56	YEAR BUILT
YEAR IMPROVED	64	67	N	54	54	34	34	36	36	35	56	YEAR IMPROVED
SURFACE WIDTH	40	40	0	28	28	20	22	22	22	20	24	SURFACE WIDTH
ROADWAY WIDTH	40	40	1	28	28	24	24	26	26	24	32	ROADWAY WIDTH
FOUNDATION - 10	N	10	10	4	4	0	0	0	0	0	9	FOUNDATION - 10
SURFACE - 30	28	30	15	16	14	13	13	14	12	12	18	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	8	7	5	8	5	10	DRAINAGE - 10
SAFETY - 20	9	3	1	6	2	2	1	1	2	2	20	SAFETY - 20
ADT 1968	1785	795	740	857	1070	1495	1641	3465	2290	1588		ADT 1968
DESIGN HOUR VOLUME	230	100	100	110	140	190	210	450	300	200		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	198	232	394	267	394	431	401	457	364	977		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	13	24	26	24	24	23	22	15	18	27		CAPACITY RATING - 30
SUFFICIENCY RATING	70	77	56	60	48	45	41	38	37	84		SUFFICIENCY RATING
ADJUSTED RATING	64	77	56	59	45	40	35	27	29	81		ADJUSTED RATING

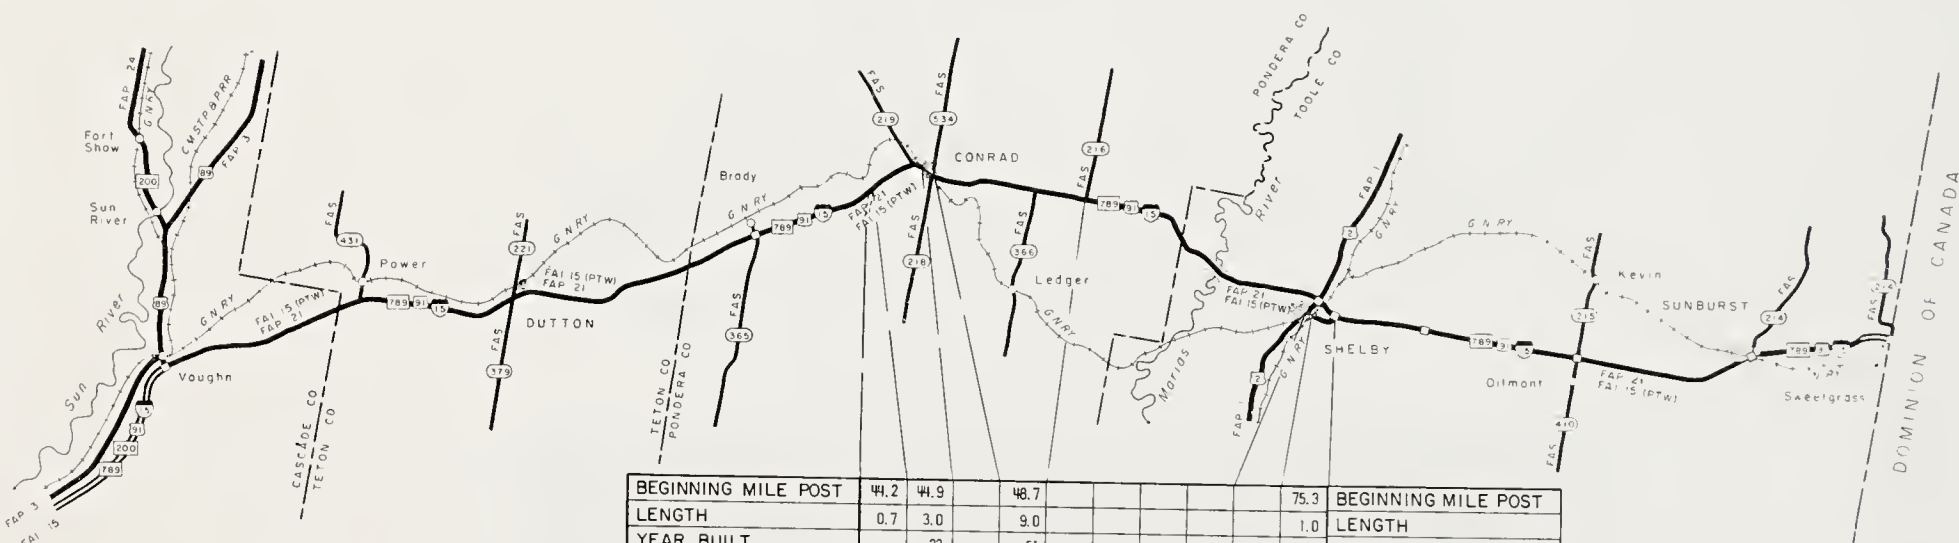

BEGINNING MILE POST	41.2	44.9	48.7						75.3	BEGINNING MILE POST
LENGTH	0.7	3.0	9.0						1.0	LENGTH
YEAR BUILT		33	51						28	YEAR BUILT
YEAR IMPROVED		34	51						35	YEAR IMPROVED
SURFACE WIDTH		24	32						22	SURFACE WIDTH
ROADWAY WIDTH		26	32						24	ROADWAY WIDTH
FOUNDATION - 10		0	7						0	FOUNDATION - 10
SURFACE - 30		12	19						10	SURFACE - 30
DRAINAGE - 10		8	10						7	DRAINAGE - 10
SAFETY - 20		1	18						0	SAFETY - 20
ADT 1968		830	525						850	ADT 1968
DESIGN HOUR VOLUME		110	70						110	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME		561	354						343	HOURLY SERVICE VOLUME
CAPACITY RATING - 30		27	27						25	CAPACITY RATING - 30
SUFFICIENCY RATING		48	81						42	SUFFICIENCY RATING
ADJUSTED RATING		47	82						41	ADJUSTED RATING



BEGINNING MILE POST		0.5	7.6	10.2	17.9	20.9	23.3		42.3	43.4	52.6		64.3	BEGINNING MILE POST
LENGTH		7.1	2.6	7.7	3.0	8.4	11.9		1.0	9.2	11.4		7.5	LENGTH
YEAR BUILT		66	35	35	36	36	36		33	33	63		33	YEAR BUILT
YEAR IMPROVED		66	36	36	36	36	37		36	36	63		36	YEAR IMPROVED
SURFACE WIDTH		32	20	20	22	22	22		20	20	32		20	SURFACE WIDTH
ROADWAY WIDTH		32	24	24	26	26	26		24	24	32		24	ROADWAY WIDTH
FOUNDATION - 10		10	0	0	0	0	0		0	0	9		0	FOUNDATION - 10
SURFACE - 30	A A N	28	11	12	13	14	13		11	12	26		9	SURFACE - 30
DRAINAGE - 10	B B A	10	8	8	8	9	9		10	9	10		8	DRAINAGE - 10
SAFETY - 20	U R B	5	1	1	1	3	3		0	1	5		1	SAFETY - 20
ADT 1968		752	491	607	304	419	937		1530	1053	791		635	ADT 1968
DESIGN HOUR VOLUME		110	70	90	50	60	140		230	160	120		100	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME		554	407	342	233	428	428		381	328	512		608	HOURLY SERVICE VOLUME
CAPACITY RATING - 30		27	27	26	27	28	25		21	23	26		28	CAPACITY RATING - 30
SUFFICIENCY RATING		80	47	47	49	54	50		42	45	76		46	SUFFICIENCY RATING
ADJUSTED RATING		80	50	49	56	58	48		37	42	76		47	ADJUSTED RATING

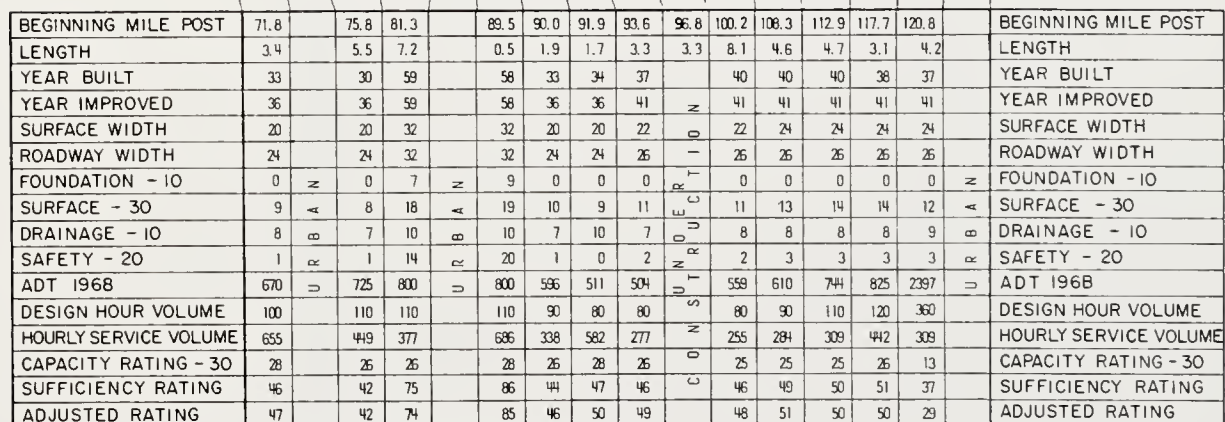




BEGINNING MILE POST	1.6	2.0	5.4	14.6	25.2	27.8	33.3	41.1	47.8	BEGINNING MILE POST
LENGTH	0.2	3.3	9.1	10.6	2.6	5.5	10.8	3.7	2.7	LENGTH
YEAR BUILT	36	36	36	62	62	31	31	32	52	YEAR BUILT
YEAR IMPROVED	36	36	36	62	62	36	36	36	52	YEAR IMPROVED
SURFACE WIDTH	22	22	22	30	30	18	18	18	22	SURFACE WIDTH
ROADWAY WIDTH	26	26	24	30	30	22	22	22	26	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	9	9	0	0	0	0	FOUNDATION - 10
SURFACE - 30	12	10	8	24	24	6	7	8	12	SURFACE - 30
DRAINAGE - 10	8	8	7	10	10	7	4	4	10	DRAINAGE - 10
SAFETY - 20	0	1	1	11	3	1	1	1	5	SAFETY - 20
ADT 196B	1420	588	555	434	423	420	398	372	366	ADT 196B
DESIGN HOUR VOLUME	180	80	70	60	60	60	60	50	50	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	432	530	426	461	445	439	418	307	192	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	24	28	28	28	28	28	28	28	26	CAPACITY RATING - 30
SUFFICIENCY RATING	44	47	44	82	74	42	40	41	53	SUFFICIENCY RATING
ADJUSTED RATING	39	49	46	84	77	46	45	46	58	ADJUSTED RATING



BEGINNING MILE POST	50.5	55.7	64.5	70.6	72.9	76.3	77.8		79.7	83.1	85.5	96.5	101.6	104.7	107.5	113.0	119.4	130.3	BEGINNING MILE POST
LENGTH	5.2	8.8	6.1	2.3	3.4	1.5	1.3		3.4	2.5	10.0	6.0	3.1	2.8	5.4	6.5	10.8	9.6	LENGTH
YEAR BUILT	52	32	41	41	41		36		40	31	53	54	54	54	55	55	55	65	YEAR BUILT
YEAR IMPROVED	52	49	41	41	41		38		40	37	53	54	54	54	61	61	55	65	YEAR IMPROVED
SURFACE WIDTH	22	24	24	22	24		22		24	22	22	24	24	24	28	28	28	40	SURFACE WIDTH
ROADWAY WIDTH	26	26	26	26	26		24		26	24	26	28	28	28	28	28	28	40	ROADWAY WIDTH
FOUNDATION - 10	3	0	2	0	0		0		0	0	3	4	4	3	4	7	4	8	FOUNDATION - 10
SURFACE - 30	14	15	16	14	15		9		13	14	17	16	17	15	15	19	17	28	SURFACE - 30
DRAINAGE - 10	10	9	10	10	8		4		9	7	10	10	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	2	1	2	1	2		1		7	1	4	12	20	3	5	13	20	19	SAFETY - 20
ADT 1968	361	359	387	418	449		1880		1624	749	603	562	549	543	567	563	570	657	ADT 1968
DESIGN HOUR VOLUME	50	50	50	50	60		250		220	100	90	80	80	80	80	80	80	100	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	328	233	271	371	271		388		319	220	232	462	486	290	408	429	450	212	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	27	27	28	27		20		20	23	24	27	28	26	27	27	27	23	CAPACITY RATING - 30
SUFFICIENCY RATING	57	52	57	53	52		34		49	45	58	69	79	57	61	76	78	88	SUFFICIENCY RATING
ADJUSTED RATING	62	57	62	57	56		28		43	45	60	71	80	59	63	77	79	88	ADJUSTED RATING

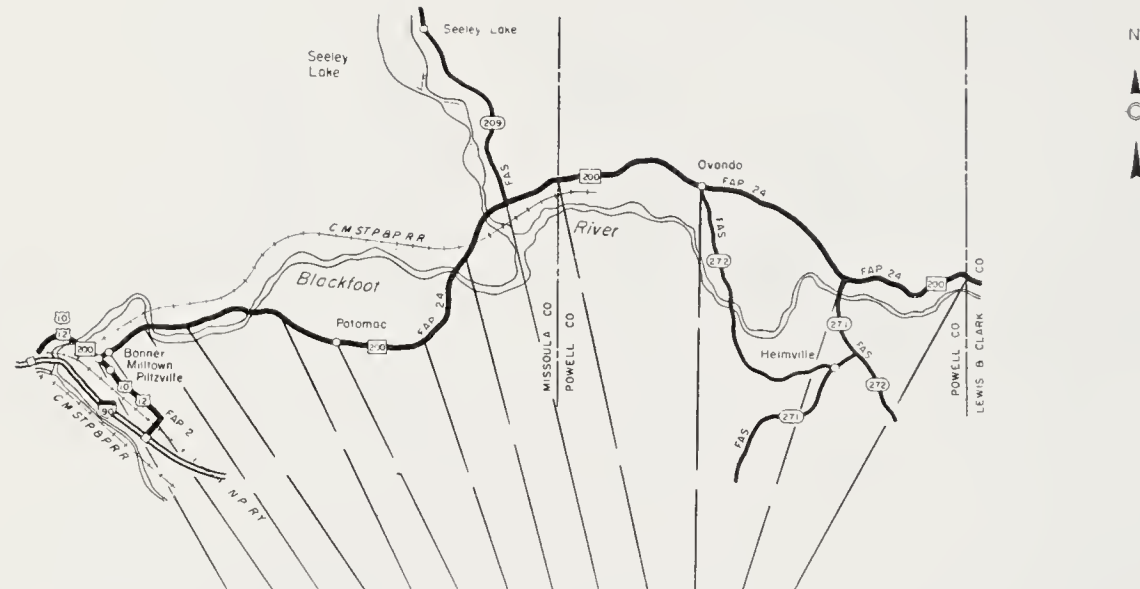


BEGINNING MILE POST	0.0	0.8	4.9	7.5	12.2	16.0	22.6	26.7	31.8	35.6	43.1	55.6	BEGINNING MILE POST
LENGTH	0.8	4.1	2.6	4.7	3.8	6.6	4.0	5.2	3.8	7.5	12.5	9.8	LENGTH
YEAR BUILT	36	36	68	40	40	68	41	49	54	54	57	56	YEAR BUILT
YEAR IMPROVED	37	37	68	44	40	68	49	49	54	61	61	61	YEAR IMPROVED
SURFACE WIDTH	24	24	40	24	22	40	24	24	30	24	24	24	SURFACE WIDTH
ROADWAY WIDTH	32	26	40	26	24	40	26	26	30	26	26	26	ROADWAY WIDTH
FOUNDATION - 10	7	0	10	3	0	10	0	0	4	9	10	9	FOUNDATION - 10
SURFACE - 30	15	13	10	14	13	30	12	13	16	24	22	23	SURFACE - 30
DRAINAGE - 10	6	4	10	5	6	10	7	8	10	10	10	10	DRAINAGE - 10
SAFETY - 20	0	3	20	2	4	13	2	2	4	5	8	5	SAFETY - 20
ADT 1968	2827	1947	1424	1400	1345	1309	1240	1228	1030	1029	937	861	ADT 1968
DESIGN HOUR VOLUME	480	260	240	240	230	220	210	210	180	180	160	150	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	322	231	328	265	133	135	94	238	238	317	334	185	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	8	13	19	16	4	6	0	17	19	21	23	18	CAPACITY RATING - 30
SUFFICIENCY RATING	36	33	89	40	27	69	21	40	53	69	73	65	SUFFICIENCY RATING
ADJUSTED RATING	27	28	87	35	23	65	18	36	51	67	72	64	ADJUSTED RATING




BEGINNING MILE POST	65.4	72.2	76.1	82.0	86.1	91.2	97.0	100.5	109.0	116.8	124.6	127.4	131.2	138.4	BEGINNING MILE POST
LENGTH	6.8	3.9	5.9	4.1	5.1	5.8	3.5	8.5	7.8	7.8	2.8	5.7	5.3	1.3	LENGTH
YEAR BUILT	39	39	40	39	39	48	41	50	45	40	40	59	64	36	YEAR BUILT
YEAR IMPROVED	60	60	60	64	64	51	51	51	52	52	52	59	64	36	YEAR IMPROVED
SURFACE WIDTH	24	24	24	28	28	24	24	24	24	24	24	32	32	24	SURFACE WIDTH
ROADWAY WIDTH	26	26	26	28	28	28	28	26	26	26	26	32	32	30	ROADWAY WIDTH
FOUNDATION - 10	9	10	9	10	10	8	7	4	0	0	4	10	9	3	FOUNDATION - 10
SURFACE - 30	23	22	24	29	27	18	18	15	13	12	15	26	28	14	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	8	8	8	8	7	7	10	10	9	DRAINAGE - 10
SAFETY - 20	5	2	1	2	2	4	2	6	1	2	1	6	4	0	SAFETY - 20
ADT 1968	1408	1351	1009	894	860	825	790	803	806	802	846	1330	1523	1577	ADT 1968
DESIGN HOUR VOLUME	210	200	160	130	130	120	120	120	120	120	130	200	230	240	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	440	630	396	396	182	228	342	291	346	374	346	594	574	491	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	23	25	24	25	19	22	25	24	25	24	25	24	23	23	CAPACITY RATING - 30
SUFFICIENCY RATING	70	69	68	76	68	60	60	57	47	46	51	77	75	49	SUFFICIENCY RATING
ADJUSTED RATING	66	65	66	75	67	59	60	56	46	45	50	74	71	43	ADJUSTED RATING

BEGINNING MILE POST	139.4	142.1	145.1	150.6
LENGTH	2.6	3.0	5.6	9.9
YEAR BUILT	34	34	34	35
YEAR IMPROVED	36	36	36	36
SURFACE WIDTH	22	22	22	22
ROADWAY WIDTH	24	24	24	24
FOUNDATION - 10	0	0	0	0
SURFACE - 30	10	12	11	13
DRAINAGE - 10	4	4	5	6
SAFETY - 20	1	0	1	3
ADT 1968	324	276	222	270
DESIGN HOUR VOLUME	50	40	30	40
HOURLY SERVICE VOLUME	702	451	273	420
CAPACITY RATING - 30	29	29	28	29
SUFFICIENCY RATING	44	45	45	51
ADJUSTED RATING	50	52	54	59

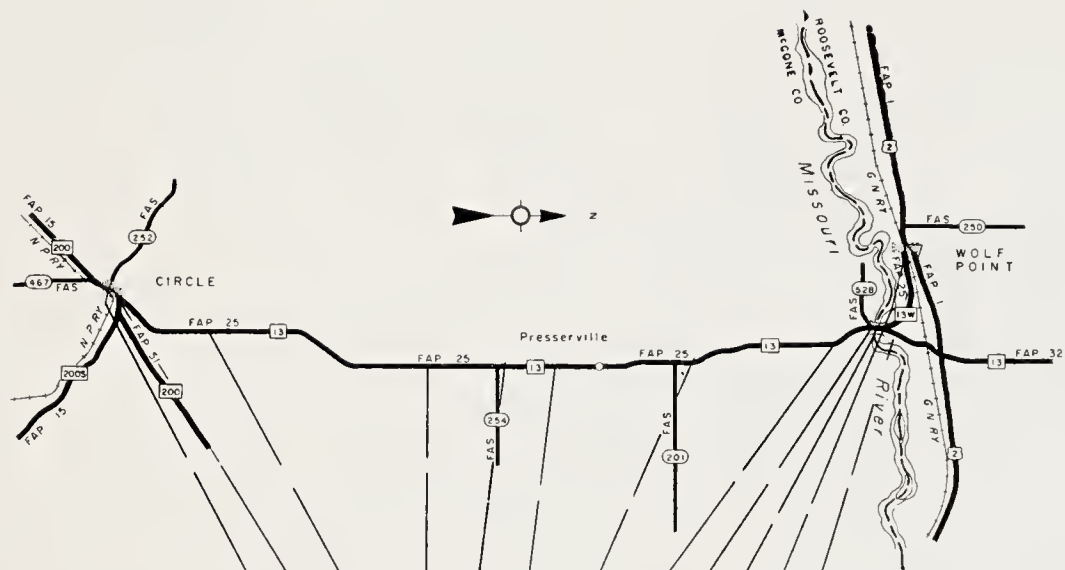

BEGINNING MILE POST		0.2	7.7	20.9	25.4	28.1	35.5	44.7	46.5	46.9	
LENGTH		7.6	13.1	4.5	2.7	7.4	9.2	1.7	0.4	5.5	
YEAR BUILT		34	36	38	38	39	37	30	30	30	
YEAR IMPROVED		36	36	40	40	40	37	36	36	36	
SURFACE WIDTH		20	22	22	22	22	22	20	20	22	
ROADWAY WIDTH		24	26	26	26	26	26	24	24	24	
FOUNDATION - 10	N	0	0	0	0	0	0	0	0	0	N
SURFACE - 30	A	13	13	13	13	15	15	14	14	14	A
DRAINAGE - 10	B	8	8	7	8	7	8	6	10	7	B
SAFETY - 20	R	1	1	2	3	2	2	0	0	3	R
ADT 1968	U	687	523	544	550	556	655	1072	1072	1338	U
DESIGN HOUR VOLUME		90	70	70	70	70	90	140	140	170	
HOURLY SERVICE VOLUME		126	192	252	421	232	212	126	220	343	
CAPACITY RATING - 30		19	25	26	28	25	24	13	20	23	
SUFFICIENCY RATING		41	47	48	52	49	49	33	44	47	
ADJUSTED RATING		42	50	50	54	51	50	31	41	43	

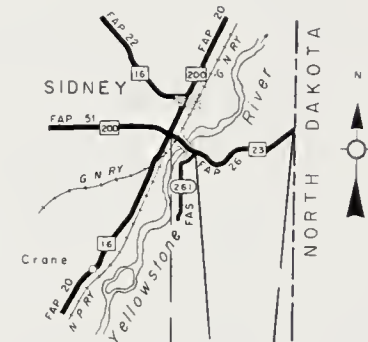

BEGINNING MILE POST	0.0	0.8
LENGTH	0.8	6.8
YEAR BUILT	36	33
YEAR IMPROVED	36	36
SURFACE WIDTH	20	18
ROADWAY WIDTH	26	24
FOUNDATION - 10	0	0
SURFACE - 30	11	10
DRAINAGE - 10	10	5
SAFETY - 20	0	2
ADT 1968	789	568
DESIGN HOUR VOLUME	100	70
HOURLY SERVICE VOLUME	413	403
CAPACITY RATING - 30	26	27
SUFFICIENCY RATING	47	44
ADJUSTED RATING	47	46




BEGINNING MILE POST		0.3	7.2	12.0	22.5	29.1		35.7	44.4	49.7	54.7	66.0	71.3	73.4		BEGINNING MILE POST
LENGTH		6.9	4.8	10.4	6.6	5.5		8.6	5.2	5.0	11.3	5.3	2.2	5.7		LENGTH
YEAR BUILT		40	41	42	47	47		41	43	44	56	55	55	55		YEAR BUILT
YEAR IMPROVED		50	50	50	48	48		56	58	58	65	65	65	65		YEAR IMPROVED
SURFACE WIDTH		22	22	22	22	22		28	30	30	28	28	28	28		SURFACE WIDTH
ROADWAY WIDTH		24	24	24	25	26		28	30	30	28	28	28	28		ROADWAY WIDTH
FOUNDATION - ID	N	3	4	2	0	0		3	6	7	10	10	10	10	N	FOUNDATION - ID
SURFACE - 3D	A	16	17	17	16	16		13	17	17	28	27	27	27	A	SURFACE - 3D
DRAINAGE - ID	B	10	10	10	9	9		10	10	10	10	10	10	10	B	DRAINAGE - ID
SAFETY - 20	2	1	2	2	2	1		17	5	3	5	4	1	2		SAFETY - 20
ADT 1968	U	368	257	258	376	615		1000	462	405	450	480	494	672	U	ADT 1968
DESIGN HOUR VOLUME		50	30	30	50	80		130	60	50	50	60	60	80		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME		431	244	244	255	212		258	297	258	461	445	279	424		HOURLY SERVICE VOLUME
CAPACITY RATING - 3D		28	28	28	27	24		22	27	27	28	28	27	27		CAPACITY RATING - 3D
SUFFICIENCY RATING		59	60	59	54	50		65	65	64	81	79	75	76		SUFFICIENCY RATING
ADJUSTED RATING		64	68	67	59	51		63	68	68	83	81	77	76		ADJUSTED RATING




BEGINNING MILE POST	0.0	4.2		10.2	12.2	22.0	30.9		36.4	41.1
LENGTH	4.2	4.5		1.9	9.8	8.9	4.5		4.7	0.6
YEAR BUILT		33		32	32	35	35		35	68
YEAR IMPROVED		34		34	34	36	36		36	68
SURFACE WIDTH		20		22	20	22	22		22	40
ROADWAY WIDTH		22		26	24	24	24		24	40
FOUNDATION - 10	R	0	N	0	0	0	0	N	0	10
SURFACE - 30	E	12	B	13	14	13	12	B	12	30
DRAINAGE - 10	D	8	B	8	8	8	8	B	6	10
SAFETY - 20	N	1	R	4	5	4	3	R	3	20
ADT 1968	U	830	U	1173	874	879	1287	U	1408	1408
DESIGN HOUR VOLUME	S	190		230	170	180	260		280	280
HOURLY SERVICE VOLUME	C	294		577	561	567	595		350	251
CAPACITY RATING - 30	O	19		24	25	25	23		19	13
SUFFICIENCY RATING	C	40		49	52	50	46		40	83
ADJUSTED RATING		39		46	51	49	42		35	80



BEGINNING MILE POST		0.2	5.7	10.7		14.8	19.9	25.2		34.2	43.2	49.9	58.4	59.8
LENGTH		5.4	5.0	2.3		5.3	5.3	7.9		8.0	6.6	8.5	1.5	5.8
YEAR BUILT		50	51	55		45	41	40		38	36	35	34	34
YEAR IMPROVED		50	51	56		45	41	40		39	39	36	36	36
SURFACE WIDTH		24	24	36		22	20	20		20	20	20	20	20
ROADWAY WIDTH		26	32	36		24	24	26		26	24	24	24	24
FOUNDATION - 10	U	4	5	7	N	3	0	0	N	0	0	0	0	0
SURFACE - 30	U	15	18	20	B	14	13	13	A	14	10	12	10	10
DRAINAGE - 10	U	7	8	10	B	5	8	8	A	8	5	6	5	5
SAFETY - 20	U	2	10	20	R	2	5	2	B	3	7	1	1	1
ADT 1968	U	906	906	906	U	945	520	470	U	681	928	673	206	206
DESIGN HOUR VOLUME		190	190	190		110	110	100		140	190	140	40	40
HOURLY SERVICE VOLUME		403	294	234		286	390	457		510	762	210	510	535
CAPACITY RATING - 30		23	18	18		24	26	27		26	26	20	29	29
SUFFICIENCY RATING		51	59	75		48	52	50		51	48	39	45	45
ADJUSTED RATING		50	58	74		50	55	53		52	46	40	55	55

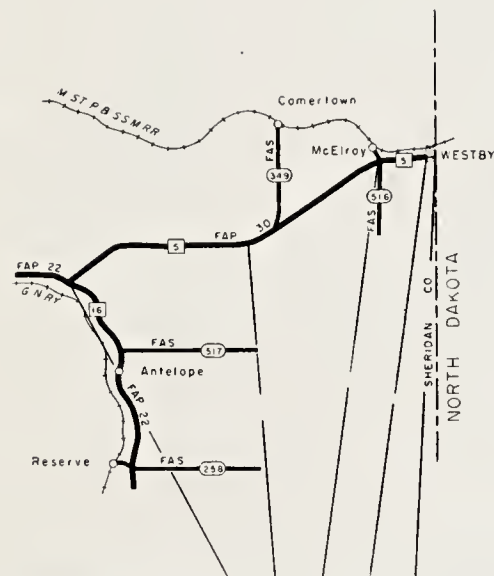

BEGINNING MILE POST	0.0	10.1	20.6	
LENGTH	10.1	10.5	2.8	
YEAR BUILT	38	39	39	
YEAR IMPROVED	40	40	40	
SURFACE WIDTH	20	20	20	
ROADWAY WIDTH	26	26	26	
FOUNDATION - 10	0	0	0	
SURFACE - 30	13	13	13	A
DRAINAGE - 10	7	8	8	B
SAFETY - 20	2	1	1	R
ADT 1968	537	290	534	U
DESIGN HOUR VOLUME	70	40	70	
HOURLY SERVICE VOLUME	267	267	290	
CAPACITY RATING - 30	26	28	26	
SUFFICIENCY RATING	48	50	48	
ADJUSTED RATING	50	57	51	

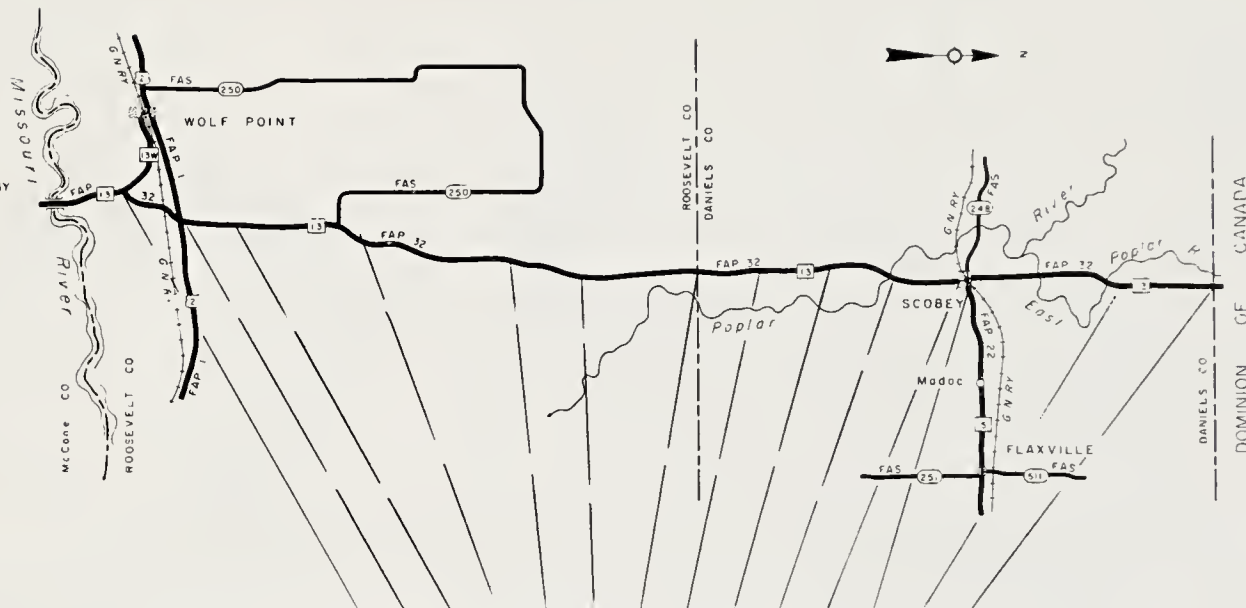


BEGINNING MILE POST	0.0	3.7	7.5	14.1	23.4	28.1	35.2	39.8	44.5	48.1		51.7	60.9	BEGINNING MILE POST
LENGTH	3.8	3.8	6.6	9.3	4.8	7.0	4.7	4.6	3.7	2.6		9.2	4.8	LENGTH
YEAR BUILT	32	32	32	32	32	32	32	33	33	33		58	45	YEAR BUILT
YEAR IMPROVED	35	35	35	35	35	35	35	35	35	35		58	65	YEAR IMPROVED
SURFACE WIDTH	20	20	20	20	20	18	18	18	20	20		26	24	SURFACE WIDTH
ROADWAY WIDTH	24	24	24	24	24	24	24	24	24	24		26	26	ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	0	0	0	0	0	0		10	4	FOUNDATION - 10
SURFACE - 30	10	13	13	13	12	11	12	10	11	11		30	14	SURFACE - 30
DRAINAGE - 10	10	9	9	7	8	7	8	8	8	8		10	10	DRAINAGE - 10
SAFETY - 20	4	1	1	1	1	1	1	1	2	1		2	2	SAFETY - 20
ADT 1968	505	505	340	340	320	308	245	245	288	960		330	80	ADT 1968
DESIGN HOUR VOLUME	80	80	50	50	50	50	40	40	50	150		50	10	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	584	373	203	168	220	191	175	337	373	203		424	359	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	27	26	26	27	26	27	28	28	19		28	30	CAPACITY RATING - 30
SUFFICIENCY RATING	52	50	49	47	48	45	48	47	49	39		80	60	SUFFICIENCY RATING
ADJUSTED RATING	55	53	55	53	54	52	56	55	56	37		84	76	ADJUSTED RATING





BEGINNING MILE POST		0.7	1.2	9.5	13.5	15.4	26.0	27.4	37.7	45.6	55.3		59.8	62.1	65.1
LENGTH		0.6	8.3	4.0	1.9	10.6	1.4	10.3	7.9	9.7	3.1		2.3	3.0	2.6
YEAR BUILT		59	42	67	67	67	67	24	24	24	22		40	40	40
YEAR IMPROVED		59	50	67	67	67	67	61	61	61	61		44	44	44
SURFACE WIDTH		26	22	34	30	28	28	18	18	18	18		22	22	22
ROADWAY WIDTH		40	26	34	30	28	28	18	18	18	18		26	26	26
FOUNDATION - 10		10	8	10	10	10	10	0	0	0	0		0	0	0
SURFACE - 30	A N	15	15	30	30	30	30	7	7	8	6		12	11	13
DRAINAGE - 10	B B	10	8	10	10	10	10	3	3	3	2		8	8	8
SAFETY - 20	R R	0	3	8	1	7	3	1	1	1	0		2	6	1
ADT 1968	U	2956	2235	1373	400	400	238	238	225	235	594		855	855	705
DESIGN HOUR VOLUME		370	280	170	50	50	30	30	30	30	70		110	110	90
HOURLY SERVICE VOLUME		331	255	554	218	464	205	226	226	185	280		232	155	232
CAPACITY RATING - 30		13	14	25	27	28	28	28	28	28	26		23	19	24
SUFFICIENCY RATING		48	48	83	78	85	81	39	39	40	34		45	44	46
ADJUSTED RATING		38	40	80	81	87	86	47	48	48	35		44	43	46

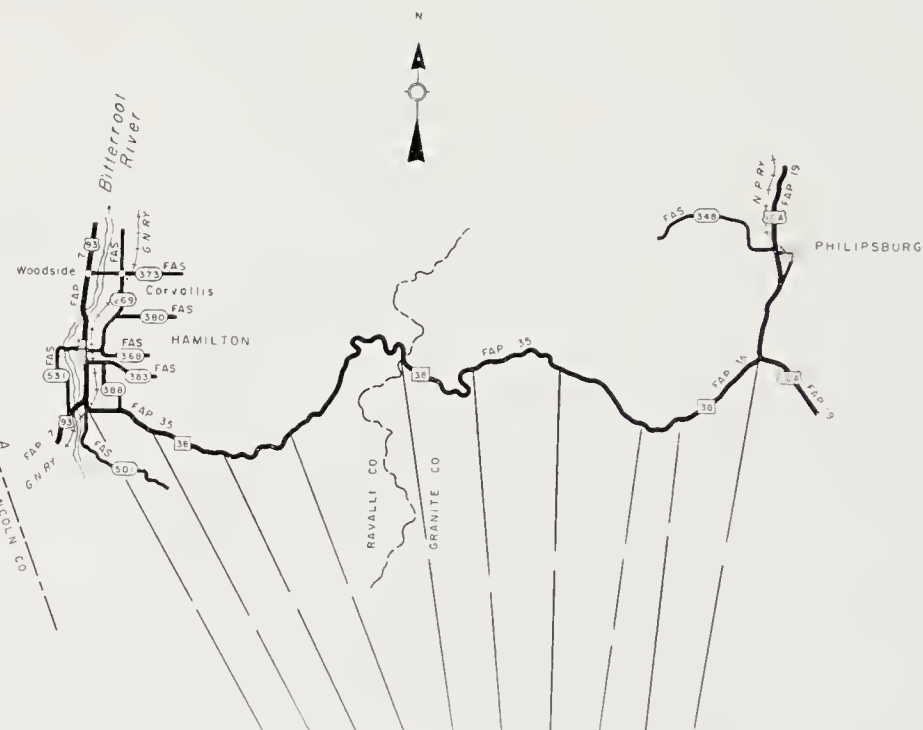

BEGINNING MILE POST	0.0	5.6	10.1	14.6	26.4	32.7	39.8	46.1	47.3
LENGTH	5.6	4.5	4.5	11.2	6.3	7.1	6.3	1.2	7.1
YEAR BUILT	41	57	66	24	23	23	36	56	66
YEAR IMPROVED	54	58	66						66
SURFACE WIDTH	20	26	28	18	18	18	20	24	30
ROADWAY WIDTH	26	26	30	18	18	18	28	30	30
FOUNDATION - 10	0	5	8	0	0	0	0	0	10
SURFACE - 30	10	13	25	4	4	4	5	5	30
DRAINAGE - 10	6	9	10	3	3	3	6	10	10
SAFETY - 20	6	1	1	0	2	4	4	20	5
ADT 1968	851	129	79	75	86	112	128	136	208
DESIGN HOUR VOLUME	120	20	10	10	10	20	20	30	30
HOURLY SERVICE VOLUME	561	250	144	135	135	92	252	363	312
CAPACITY RATING - 30	27	29	29	29	29	27	29	29	29
SUFFICIENCY RATING	49	57	73	36	38	38	44	64	84
ADJUSTED RATING	48	70	86	52	53	51	57	76	89


BEGINNING MILE POST	46.0
LENGTH	1.7
YEAR BUILT	40
YEAR IMPROVED	41
SURFACE WIDTH	22
ROADWAY WIDTH	24
FOUNDATION - IO	0
SURFACE - 30	11
DRAINAGE - IO	6
SAFETY - 20	2
ADT 1968	738
DESIGN HOUR VOLUME	100
HOURLY SERVICE VOLUME	486
CAPACITY RATING - 30	27
SUFFICIENCY RATING	46
ADJUSTED RATING	46



BEGINNING MILE POST	0.0	7.4	13.8	16.2	18.9	26.1	31.1	31.6	36.1	40.2	BEGINNING MILE POST
LENGTH	7.5	6.4	2.4	2.7	7.2	5.0	0.5	4.4	4.1	6.5	LENGTH
YEAR BUILT	44	43	40	59	59	39	39	39	36	36	YEAR BUILT
YEAR IMPROVED	46	46	41	63	63	40	40	40	40	40	YEAR IMPROVED
SURFACE WIDTH	22	22	22	28	28	22	22	22	22	22	SURFACE WIDTH
ROADWAY WIDTH	26	24	26	28	28	26	26	26	26	26	ROADWAY WIDTH
FOUNDATION - IO	3	0	0	10	10	0	0	0	0	0	FOUNDATION - IO
SURFACE - 30	13	12	11	28	27	12	13	13	12	12	SURFACE - 30
DRAINAGE - IO	7	6	6	10	10	7	7	6	7	7	DRAINAGE - IO
SAFETY - 20	5	3	2	3	14	2	20	3	2	4	SAFETY - 20
ADT 1968	475	400	383	571	565	365	336	371	406	438	ADT 1968
DESIGN HOUR VOLUME	70	60	60	90	80	50	50	60	60	60	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	270	126	155	574	477	528	308	272	421	260	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	26	23	24	28	27	29	28	27	28	27	CAPACITY RATING - 30
SUFFICIENCY RATING	94	44	43	79	88	50	68	49	49	50	SUFFICIENCY RATING
ADJUSTED RATING	57	49	48	80	89	55	73	54	54	54	ADJUSTED RATING





BEGINNING MILE POST	0.0	7.9	17.2	24.5	32.6	38.7	42.3	46.5	53.6	62.3	64.3	69.6	79.3	82.6	84.7	95.7	98.9	BEGINNING MILE POST
LENGTH	7.9	9.3	7.3	8.1	6.1	3.6	4.2	7.1	8.7	2.0	5.3	9.7	3.4	2.1	11.0	3.2	4.7	LENGTH
YEAR BUILT	37	38	38	39	41	41	48	50	50	48	40	38	38	38				YEAR BUILT
YEAR IMPROVED	54	54	54	54	54	54	54	54	54	57	57	67	67	67				YEAR IMPROVED
SURFACE WIDTH	22	24	24	24	24	24	24	24	24	24	24	28	28	28				SURFACE WIDTH
ROADWAY WIDTH	24	24	26	26	24	26	26	26	24	28	28	28	28	28				ROADWAY WIDTH
FOUNDATION - 10	0	0	0	0	0	0	0	0	6	8	7	10	10	10				FOUNDATION - 10
SURFACE - 30	14	14	13	12	11	14	14	15	19	22	21	30	30	30				SURFACE - 30
DRAINAGE - 10	8	8	8	10	9	10	9	8	9	10	10	10	10	10				DRAINAGE - 10
SAFETY - 20	2	2	1	2	2	1	4	7	3	1	5	4	1	2				SAFETY - 20
ADT 196B	1205	659	825	811	782	893	853	779	674	645	573	533	534	534				ADT 196B
DESIGN HOUR VOLUME	160	90	120	110	130	120	110	90	90	80	70	70	70	70				DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	201	197	211	388	217	211	255	94	258	480	331	424	132	295				HOURLY SERVICE VOLUME
CAPACITY RATING - 30	18	23	21	26	22	21	23	12	25	27	26	28	22	26				CAPACITY RATING - 30
SUFFICIENCY RATING	42	47	43	50	44	46	50	42	62	68	69	82	73	78				SUFFICIENCY RATING
ADJUSTED RATING	39	48	42	49	44	45	49	42	63	69	71	83	75	80				ADJUSTED RATING

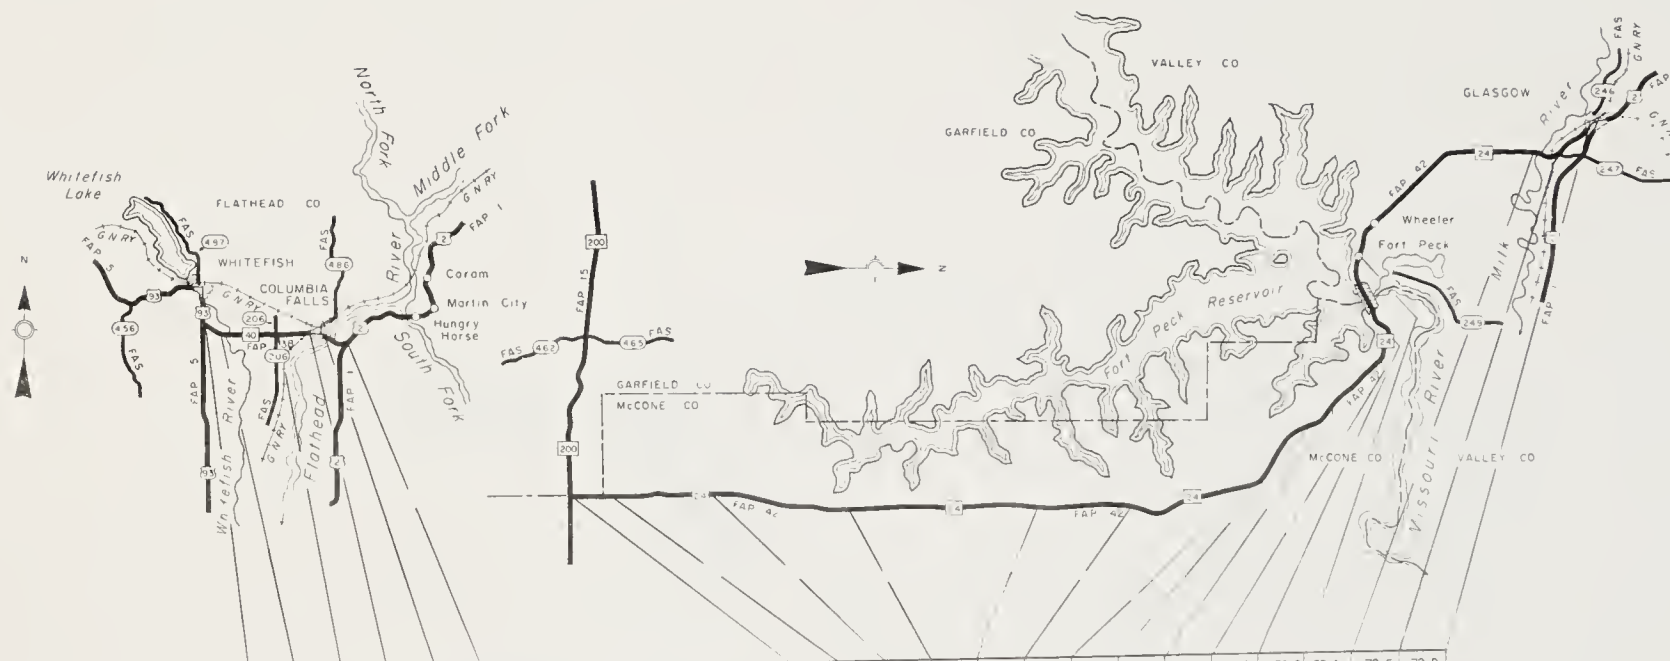

BEGINNING MILE POST	0.0	0.3	4.5	7.4
LENGTH	0.3	4.2	1.9	1.6
YEAR BUILT	60	39	39	37
YEAR IMPROVED	60	39	39	37
SURFACE WIDTH	36	22	24	22
ROADWAY WIDTH	36	28	28	28
FOUNDATION - 10	10	0	0	0
SURFACE - 30	25	11	12	11
DRAINAGE - 10	10	8	8	7
SAFETY - 20	0	1	1	0
ADT 1968	1730	1786	3565	2599
DESIGN HOUR VOLUME	240	250	500	360
HOURLY SERVICE VOLUME	156	218	503	462
CAPACITY RATING - 30	7	13	15	18
SUFFICIENCY RATING	52	33	36	36
ADJUSTED RATING	46	27	25	27

BEGINNING MILE POST	0.0	2.0	8.3	19.7	31.8	37.2	46.0	50.6	52.2	55.2	56.2	59.1	70.5	73.2
LENGTH	2.0	6.3	11.4	12.1	5.5	8.8	4.6	1.6	3.0	1.0	2.9	11.3	2.7	2.2
YEAR BUILT	60	60	63	62	56	56	53	53	36	36	36	36	34	34
YEAR IMPROVED	64	64	64	64	64	64	64	64	66	66	66	66	34	34
SURFACE WIDTH	24	24	24	24	24	24	24	24	28	36	36	22	22	22
ROADWAY WIDTH	40	40	42	36	34	32	30	34	28	36	36	26	24	24
FOUNDATION - 10	5	5	0	3	4	3	2	0	9	10	10	0	0	0
SURFACE - 30	11	13	8	10	12	11	10	14	28	28	28	15	15	15
DRAINAGE - 10	10	10	10	10	10	10	10	10	10	10	10	7	9	9
SAFETY - 20	20	4	11	12	3	9	2	20	1	0	3	1	3	1
ADT 1968	160	150	132	123	133	148	170	180	199	265	528	717	945	1296
DESIGN HOUR VOLUME	30	20	20	20	20	20	30	30	30	40	80	110	150	210
HOURLY SERVICE VOLUME	462	267	493	535	236	340	470	254	312	461	488	255	364	269
CAPACITY RATING - 30	29	29	29	29	29	29	29	28	29	29	28	24	24	18
SUFFICIENCY RATING	75	61	58	64	58	62	53	72	77	77	79	47	51	43
ADJUSTED RATING	64	72	71	76	71	73	64	80	64	62	81	47	49	35

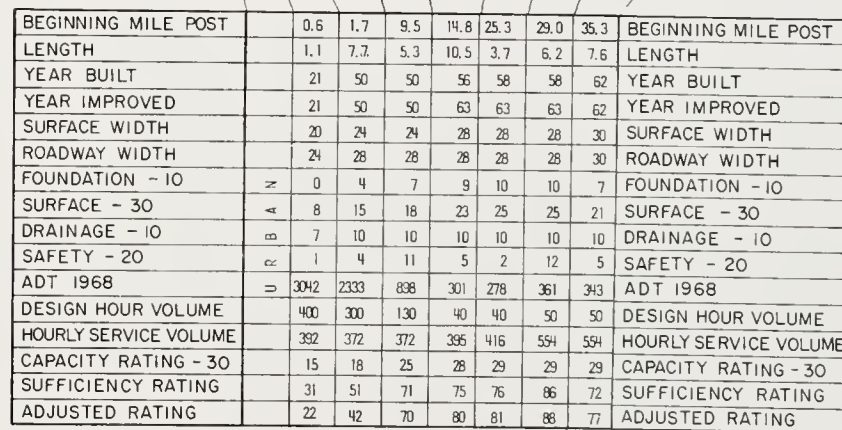

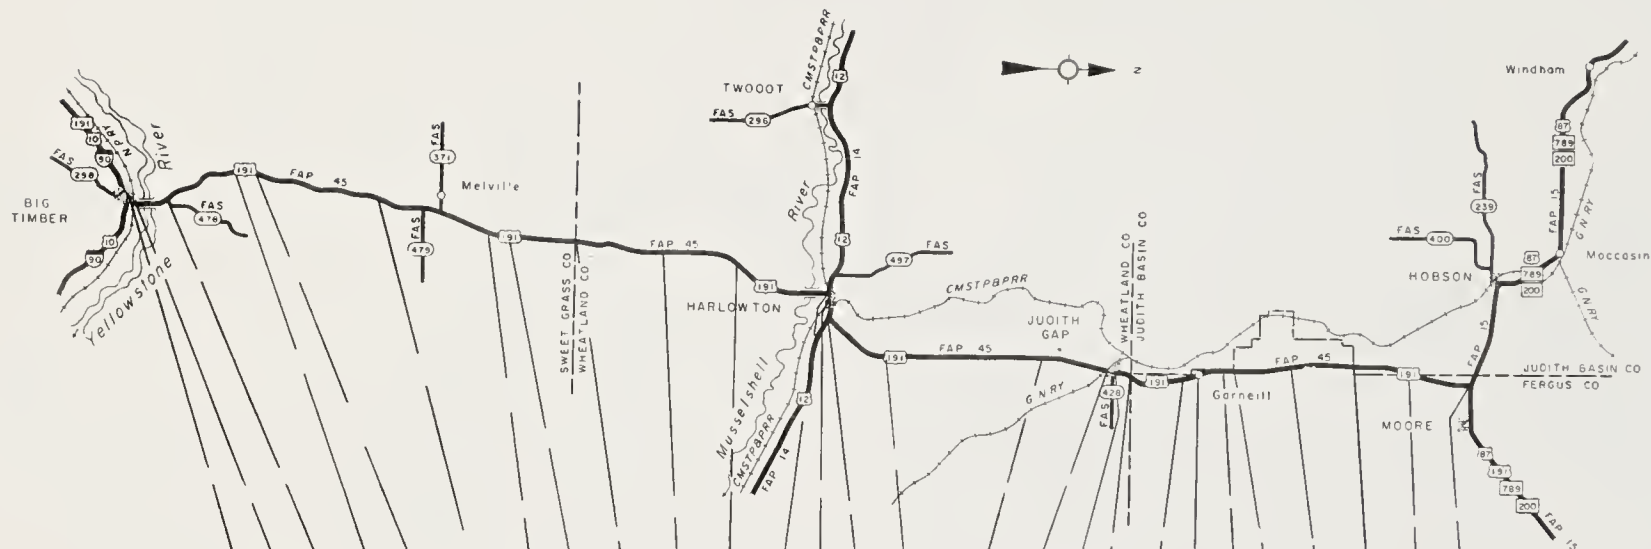

BEGINNING MILE POST	0.5	2.8	7.3	8.0	15.7	22.7	23.8	28.2	33.3	38.2		45.3	49.1	58.5		63.4	64.2	67.2	67.9	69.8	70.4	74.4	78.4	81.3	BEGINNING MILE POST
LENGTH	2.2	4.6	0.7	7.7	7.0	1.0	4.4	5.1	4.9	5.6		3.8	9.5	4.3		0.7	3.0	0.7	1.9	0.6	4.0	4.0	2.9	3.2	LENGTH
YEAR BUILT	34	35		42	47		46	46	35	34		48	48	48		49	47	47	47	47	47	41	41	46	YEAR BUILT
YEAR IMPROVED	39	39		42	47		46	46	39	39		54	54	54		54	47	47	47	47	47	46	46	46	YEAR IMPROVED
SURFACE WIDTH	20	20		20	22		22	22	20	20		24	24	24		24	24	22	22	22	22	22	22	22	SURFACE WIDTH
ROADWAY WIDTH	24	24		24	26		26	26	24	24		26	26	26		26	26	26	26	26	26	26	26	26	ROADWAY WIDTH
FOUNDATION - 10	N	0	0	R	0	0	U	0	0	0		4	5	6		9	5	5	5	3	5	0	0	0	FOUNDATION - 10
SURFACE - 3D	B	11	11	E	11	12	E	14	15	13	12	16	18	18		19	18	17	17	13	17	13	14	14	SURFACE - 3D
DRAINAGE - 10	A	5	4	D	4	9	D	9	10	7	6	9	10	10		10	10	10	10	10	9	9	9	9	DRAINAGE - 10
SAFETY - 20	R	1	1	N	1	1	N	2	1	1	0	1	2	1		1	1	0	2	1	2	1	3	1	SAFETY - 20
ADT 1968	U	912	673	U	439	322	U	227	229	308	583	U	719	651	617	U	761	715	651	680	720	740	725	720	ADT 1968
DESIGN HOUR VOLUME		120	90	S	60	40	S	30	30	40	80		90	80	80		100	90	80	90	90	100	90	90	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME		471	185	C	233	340	C	290	362	406	233		346	500	355		309	471	501	478	401	454	277	454	HOURLY SERVICE VOLUME
CAPACITY RATING - 30		26	23		26	28		28	29	29	25		26	28	27		25	27	28	27	27	25	27	25	CAPACITY RATING - 30
SUFFICIENCY RATING		43	39		42	50		53	55	50	43		56	63	62		64	61	60	61	54	60	48	53	SUFFICIENCY RATING
ADJUSTED RATING		42	40		46	56		62	64	57	45		56	64	63		64	61	61	62	54	60	48	53	ADJUSTED RATING





BEGINNING MILE POST	0.0	0.1	1.1	4.1	7.8	17.0	26.3	31.6	36.9	41.9	51.3	51.4	56.9	57.9	58.8	66.7	73.5	74.8	76.6	BEGINNING MILE POST
LENGTH	0.1	1.0	2.9	3.7	9.4	9.2	5.3	5.3	5.0	9.4	0.1	5.6	1.1	0.8	7.7	7.0	1.3	1.4	0.6	LENGTH
YEAR BUILT	60		60	60	62	62	57	56	53	41	41	47	47	61	48	35	68	68	57	YEAR BUILT
YEAR IMPROVED	63		63	63	63	62	65	65	54	61	61	61	61	61	61	61	68	68	57	YEAR IMPROVED
SURFACE WIDTH	28		28	28	28	30	28	26	26	26	26	26	26	30	26	26	34	34	32	SURFACE WIDTH
ROADWAY WIDTH	28		28	28	28	30	28	26	26	26	26	26	26	30	26	26	34	34	32	ROADWAY WIDTH
FOUNDATION - 10	10	10	9	10	9	8	10	10	10	9	10	8	9	9	8	8	10	10	8	FOUNDATION - 10
SURFACE - 30	30	10	27	28	28	23	28	29	29	21	22	21	22	21	19	18	30	30	20	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	10	10	10	10	9	10	10	10	10	8	6	10	10	10	DRAINAGE - 10
SAFETY - 20	20	20	20	20	5	6	3	3	3	3	20	4	2	0	2	2	20	3	1	SAFETY - 20
ADT 1968	95	110	122	146	200	279	241	203	199	199	201	217	235	290	284	281	325	369		ADT 1968
DESIGN HOUR VOLUME	10	20	20	20	30	40	40	30	30	30	30	30	30	40	40	40	50	60		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	360	112	414	350	512	512	549	368	350	414	386	368	414	290	276	296	368	290		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	30	27	29	29	29	29	29	29	29	29	29	29	29	29	28	28	28	27		CAPACITY RATING - 30
SUFFICIENCY RATING	100	93	97	81	76	80	81	81	71	91	72	72	69	65	62	98	81	66		SUFFICIENCY RATING
ADJUSTED RATING	100	96	98	88	83	85	86	87	79	94	80	79	76	71	69	98	85	71		ADJUSTED RATING




BEGINNING MILE POST	0.0	BEGINNING MILE POST
LENGTH	6.0	LENGTH
YEAR BUILT	34	YEAR BUILT
YEAR IMPROVED	49	YEAR IMPROVED
SURFACE WIDTH	24	SURFACE WIDTH
ROADWAY WIDTH	26	ROADWAY WIDTH
FOUNDATION - 10	3	FOUNDATION - 10
SURFACE - 30	17	SURFACE - 30
DRAINAGE - 10	8	DRAINAGE - 10
SAFETY - 20	6	SAFETY - 20
ADT 1968	1536	ADT 1968
DESIGN HOUR VOLUME	210	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	646	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	25	CAPACITY RATING - 30
SUFFICIENCY RATING	59	SUFFICIENCY RATING
ADJUSTED RATING	54	ADJUSTED RATING

BEGINNING MILE POST	27.6
LENGTH	0.4
YEAR BUILT	
YEAR IMPROVED	
SURFACE WIDTH	
ROADWAY WIDTH	
FOUNDATION - 10	
SURFACE - 30	1
DRAINAGE - 10	1
SAFETY - 20	1
ADT 1968	1
DESIGN HOUR VOLUME	1
HOURLY SERVICE VOLUME	1
CAPACITY RATING - 30	1
SUFFICIENCY RATING	1
ADJUSTED RATING	1

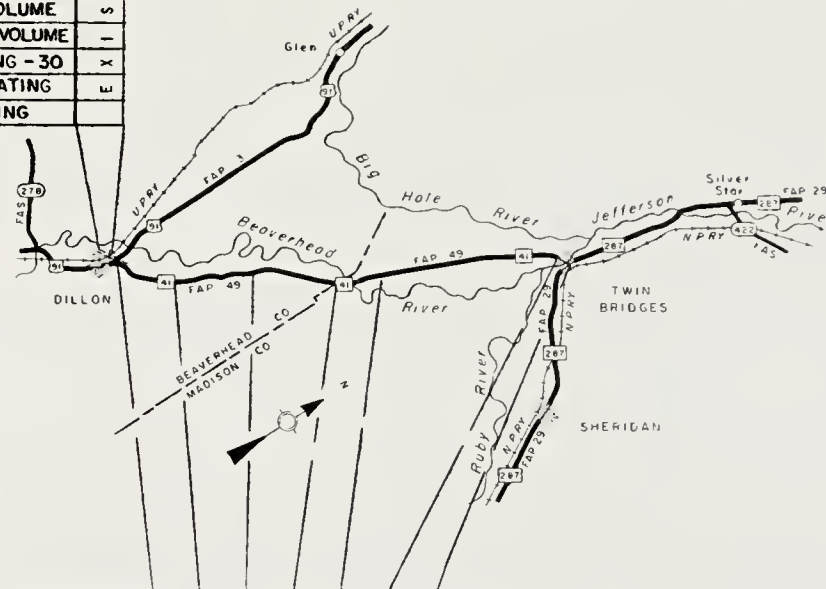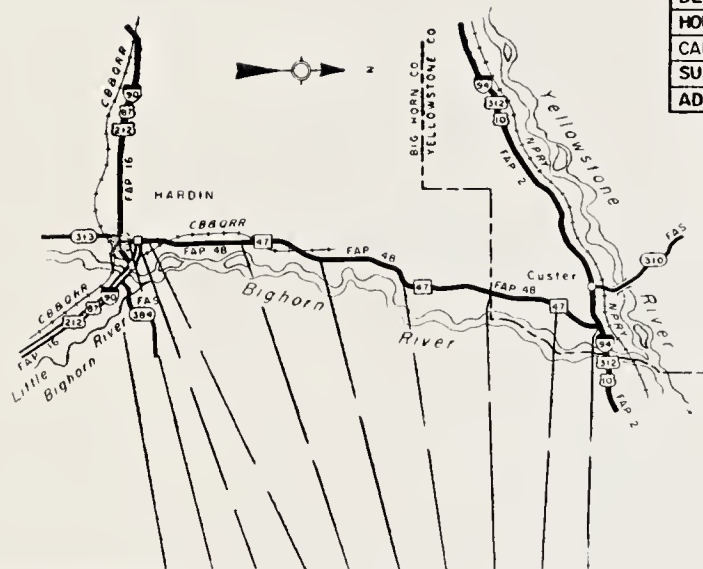

BEGINNING MILE POST		0.7	1.0	1.3	6.8	11.6	18.3	22.7	26.4
LENGTH		0.4	0.3	5.5	4.9	6.7	4.4	3.7	3.2
YEAR BUILT				41	45	54	57	57	57
YEAR IMPROVED				41	45	54	63	63	63
SURFACE WIDTH				20	22	24	28	28	28
ROADWAY WIDTH				24	26	26	28	28	28
FOUNDATION - 10				0	2	6	9	9	10
SURFACE - 30				14	14	18	27	27	27
DRAINAGE - 10				8	9	10	10	10	10
SAFETY - 20				5	3	4	2	2	6
ADT 1968				1359	504	280	204	209	210
DESIGN HOUR VOLUME				180	70	40	30	30	30
HOURLY SERVICE VOLUME				420	457	567	354	333	554
CAPACITY RATING - 30				24	28	29	29	29	29
SUFFICIENCY RATING				51	56	67	77	77	82
ADJUSTED RATING				47	59	73	84	84	87



BEGINNING MILE POST	0.0	3.0	6.8	13.7	16.2		BEGINNING MILE POST
LENGTH	3.0	3.8	6.9	2.5	10.7		LENGTH
YEAR BUILT	36	40	59	59	53		YEAR BUILT
YEAR IMPROVED	46	46	59	59	53		YEAR IMPROVED
SURFACE WIDTH	24	22	24	24	24		SURFACE WIDTH
ROADWAY WIDTH	26	24	26	24	28		ROADWAY WIDTH
FOUNDATION - 10	0	2	7	7	5		FOUNDATION - 10
SURFACE - 30	14	14	19	19	16		SURFACE - 30
DRAINAGE - 10	7	8	10	8	8		DRAINAGE - 10
SAFETY - 20	6	1	3	1	11		SAFETY - 20
ADT 1968	2750	971	749	575	776		ADT 1968
DESIGN HOUR VOLUME	360	130	100	70	100		DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	525	273	294	377	629		HOURLY SERVICE VOLUME
CAPACITY RATING - 30	20	23	24	27	28		CAPACITY RATING - 30
SUFFICIENCY RATING	47	48	63	62	68		SUFFICIENCY RATING
ADJUSTED RATING	37	46	63	64	68		ADJUSTED RATING

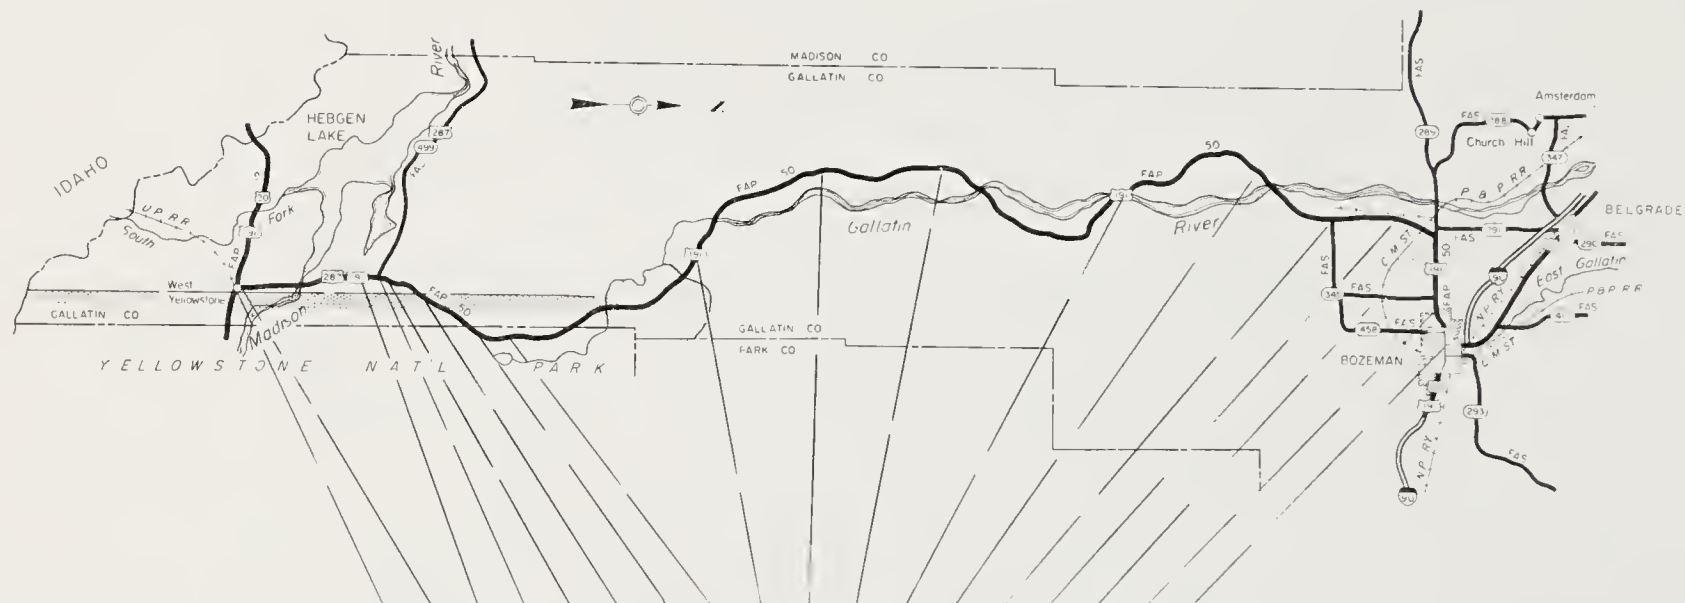

BEGINNING MILE POST	0.2	7.2	8.3	8.5	10.6	14.9	16.6	31.1	40.0	47.9	60.8	70.2	76.4	80.0	81.9	BEGINNING MILE POST
LENGTH	7.1	1.0	0.2	2.2	4.3	1.6	14.6	8.9	7.9	12.9	9.3	6.3	3.6	1.9	4.4	LENGTH
YEAR BUILT	68	66	66	62	56	58	57	60	58	54	55	58	64	64	56	YEAR BUILT
YEAR IMPROVED	68	66	66	62	63	63	63	60	60	55	67	60	64	64	60	YEAR IMPROVED
SURFACE WIDTH	40	34	38	32	32	44	32	28	28	28	28	32	32	36	36	SURFACE WIDTH
ROADWAY WIDTH	40	34	38	32	32	44	32	28	28	28	28	32	32	36	36	ROADWAY WIDTH
FOUNDATION - 10	10	10	10	7	10	10	10	9	8	8	10	10	10	10	10	FOUNDATION - 10
SURFACE - 30	30	30	30	17	25	24	25	20	20	20	30	25	28	28	26	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10	10	10	10	10	9	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	20	1	0	2	20	20	20	9	8	2	6	6	4	1	3	SAFETY - 20
ADT 1968	1350	1097	665	665	645	638	649	681	710	834	980	1070	1630	2034	3178	ADT 1968
DESIGN HOUR VOLUME	320	260	160	160	150	150	150	160	170	200	230	260	340	430	510	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	238	594	244	298	400	474	400	354	354	251	180	531	594	218	218	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	10	23	20	22	24	25	24	23	23	18	11	23	21	0	0	CAPACITY RATING - 30
SUFFICIENCY RATING	80	74	70	58	90	89	90	71	69	57	67	74	73	49	49	SUFFICIENCY RATING
ADJUSTED RATING	77	72	71	59	90	89	90	71	69	56	65	72	68	42	38	ADJUSTED RATING




BEGINNING MILE POST	0.0	3.3	8.3	9.1	18.7		27.5	32.5	38.4	49.2	52.7	60.7	64.3	BEGINNING MILE POST
LENGTH	3.3	5.0	0.8	9.7	8.5		5.0	5.8	10.8	3.5	8.0	3.6	6.7	LENGTH
YEAR BUILT	60	60	60	59	59		58	58	57	56	56	53	53	YEAR BUILT
YEAR IMPROVED	61	61	61	59	59		58	58	57	56	56	55	55	YEAR IMPROVED
SURFACE WIDTH	30	30	30	28	28		28	28	28	24	24	24	24	SURFACE WIDTH
ROADWAY WIDTH	30	30	30	28	28		32	32	30	28	28	28	28	ROADWAY WIDTH
FOUNDATION - 10	10	10	10	9	6		7	7	2	3	4	6	5	FOUNDATION - 10
SURFACE - 30	26	26	25	20	18		15	14	12	14	14	17	15	SURFACE - 30
DRAINAGE - 10	10	10	10	10	10		10	10	10	10	10	10	10	DRAINAGE - 10
SAFETY - 20	2	3	20	10	8		5	2	20	1	16	4	13	SAFETY - 20
ADT 1968	200	180	142	140	174		269	167	244	274	306	309	571	ADT 1968
DESIGN HOUR VOLUME	30	30	20	20	20		40	20	30	40	40	40	70	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	554	385	534	328	302		536	469	471	500	421	394	531	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	29	29	29	29	29		29	29	29	29	29	28	28	CAPACITY RATING - 30
SUFFICIENCY RATING	77	78	94	78	71		66	62	73	57	73	65	71	SUFFICIENCY RATING
ADJUSTED RATING	84	85	96	86	80		73	73	79	64	78	71	73	ADJUSTED RATING

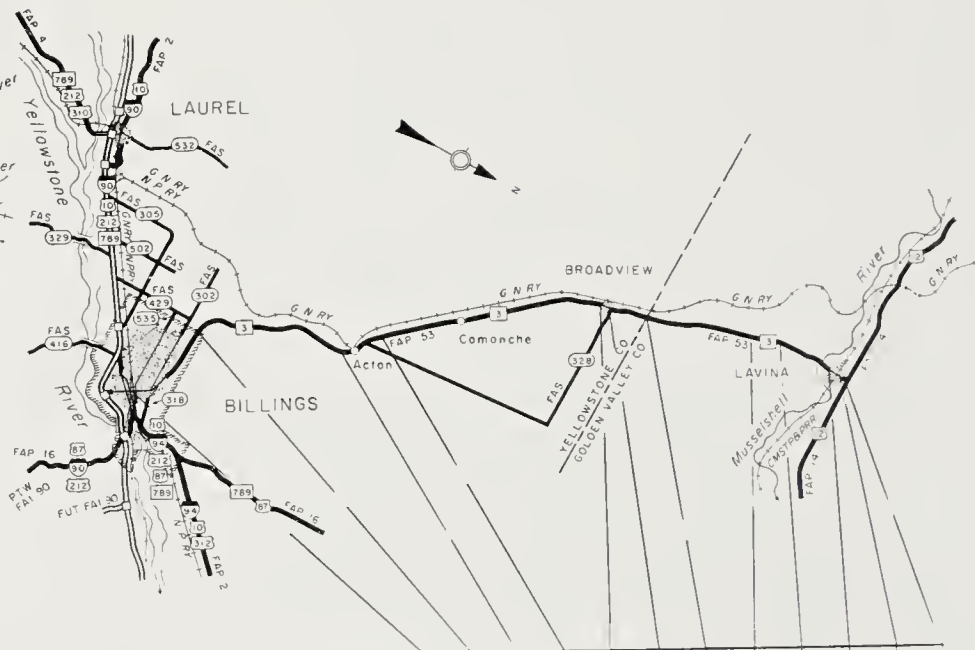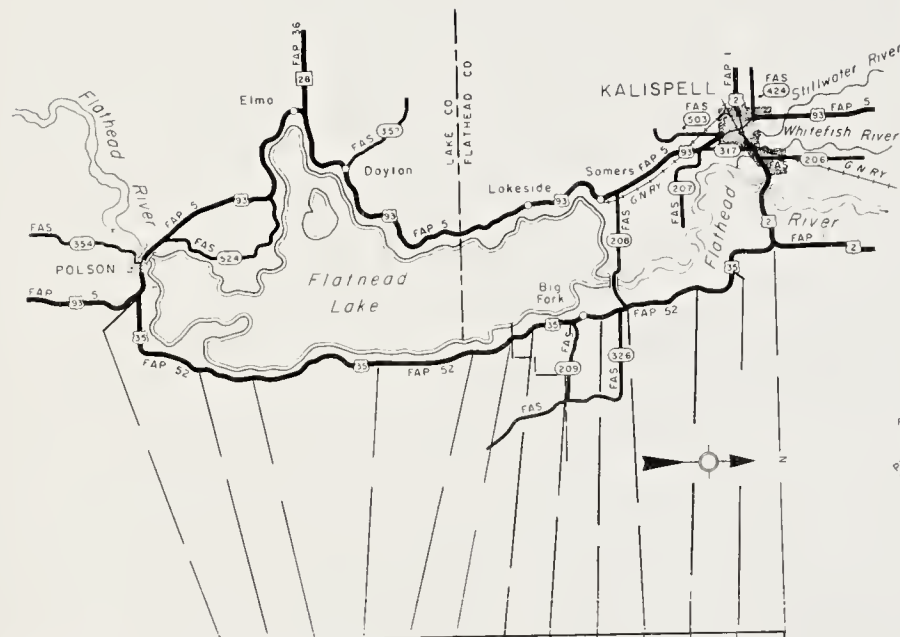

BEGINNING MILE POST	0.0	7.1	10.3	18.0	23.6	26.3	28.3	30.3	32.2	33.9	37.8	41.6
LENGTH	7.1	3.2	7.7	5.6	2.7	2.0	2.0	2.0	1.7	3.9	3.8	3.9
YEAR BUILT	40	47	48	37	36	36	36	22	22	35	34	34
YEAR IMPROVED	50	47	48	38	51	39	35	49	49	49	49	49
SURFACE WIDTH	22	22	24	22	22	22	22	24	22	22	22	22
ROADWAY WIDTH	26	24	28	24	24	24	24	28	24	24	24	24
FOUNDATION - 10	5	2	7	0	4	0	0	4	0	2	2	2
SURFACE - 30	13	11	15	11	14	12	12	13	12	13	12	11
DRAINAGE - 10	7	6	8	7	6	5	5	10	6	4	4	4
SAFETY - 20	1	2	2	1	3	1	0	1	0	1	1	2
ADT 1968	1952	980	1008	1042	1143	1315	1495	1495	1429	1050	1144	1170
DESIGN HOUR VOLUME	290	150	150	160	170	200	220	220	210	160	170	180
HOURLY SERVICE VOLUME	185	378	468	244	349	133	151	156	349	349	349	655
CAPACITY RATING - 30	6	24	25	20	23	7	8	9	21	23	23	26
SUFFICIENCY RATING	32	45	57	39	50	25	25	37	39	43	42	45
ADJUSTED RATING	26	43	55	37	47	22	21	32	34	40	39	42

BEGINNING MILE POST	7.1	15.9	18.8	32.0	34.2	40.5	41.9	46.2
LENGTH	8.8	3.0	12.7	2.2	6.3	1.4	3.5	0.4
YEAR BUILT	39	42	46	36	36	56	56	56
YEAR IMPROVED	48	48	48	48	48	56	56	56
SURFACE WIDTH	22	22	22	22	22	28	28	28
ROADWAY WIDTH	24	24	24	24	24	30	30	30
FOUNDATION - 10	N	0	4	4	N	0	0	4
SURFACE - 30	13	16	17	12	10	15	13	14
DRAINAGE - 10	8	9	9	7	8	10	10	10
SAFETY - 20	1	1	3	1	1	1	3	1
ADT 1968	1006	892	800	725	678	698	817	743
DESIGN HOUR VOLUME	140	120	100	90	90	90	110	100
HOURLY SERVICE VOLUME	244	431	431	265	449	552	333	552
CAPACITY RATING - 30	21	26	27	25	27	28	25	27
SUFFICIENCY RATING	43	56	60	45	46	58	51	58
ADJUSTED RATING	40	55	59	45	47	58	50	58

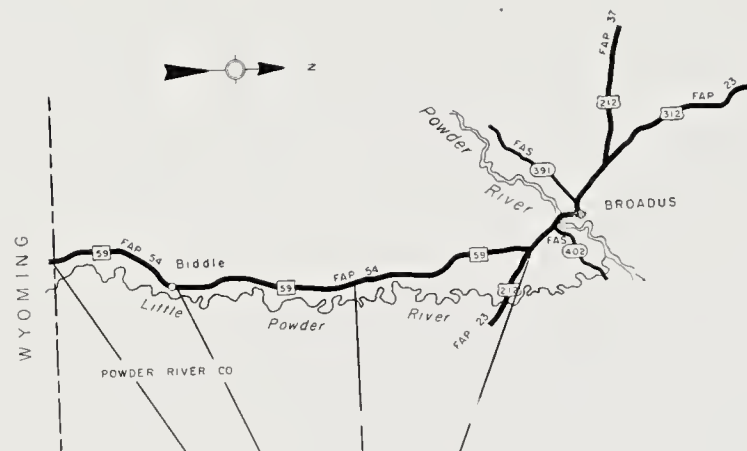

BEGINNING MILE POST	0.0	9.1	17.9	BEGINNING MILE POST
LENGTH	9.1	8.8	11.5	LENGTH
YEAR BUILT	55	68	48	YEAR BUILT
YEAR IMPROVED	59	68	66	YEAR IMPROVED
SURFACE WIDTH	24	30	22	SURFACE WIDTH
ROADWAY WIDTH	24	30	24	ROADWAY WIDTH
FOUNDATION - 10	7	10	0	FOUNDATION - 10
SURFACE - 30	21	30	11	SURFACE - 30
DRAINAGE - 10	10	10	8	DRAINAGE - 10
SAFETY - 20	2	20	1	SAFETY - 20
ADT 1968	324	338	348	ADT 1968
DESIGN HOUR VOLUME	40	40	40	DESIGN HOUR VOLUME
HOURLY SERVICE VOLUME	235	344	160	HOURLY SERVICE VOLUME
CAPACITY RATING - 30	28	28	26	CAPACITY RATING - 30
SUFFICIENCY RATING	68	98	46	SUFFICIENCY RATING
ADJUSTED RATING	73	98	52	ADJUSTED RATING

